

MODEL
FDCB

Fully adjustable pressure compensated flow control valve with reverse flow check

SERIES 2 / CAPACITY: 12 gpm / CAVITY: T-5A

sunhydraulics.com/model/FDCB



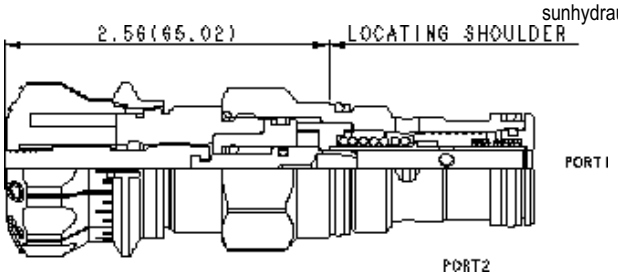

CONFIGURATION

H	Control	Calibrated Handknob with Detent Lock
A	Adjustment Range	.2 - 12 gpm (0,8 - 45 L/min.)
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

Fully adjustable, pressure-compensated flow controls with reverse-flow check provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. They are infinitely adjustable from nearly closed up to the maximum flow. An integral high-capacity check valve provides unrestricted flow from port 2 to port 1.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Adjustment - No. of CCW Turns from Fully Closed to Fully Open	5
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990203007
Seal kit - Cartridge	EPDM: 990203014
Seal kit - Cartridge	Viton: 990203006

NOTES

For Series 1 cartridges configured with an O control (panel mount handknob), a .75 in. (19 mm) diameter hole is required in the panel.

CONFIGURATION OPTIONS

Model Code Example: FDCBHAN

CONTROL (H)	ADJUSTMENT RANGE (A)	SEAL MATERIAL (N)	MATERIAL/COATING
H Calibrated Handknob with Detent Lock	**A** .2 - 12 gpm (0,8 - 45 L/min.)	**N** Buna-N	Standard Material/Coating
L Standard Screw Adjustment	**B** .2 - 3 gpm (0,8 - 11 L/min.)	**E** EPDM	**/LH** Mild Steel, Zinc-Nickel
K Handknob		**V** Viton	
Y Tri-Grip Handknob			

© 2019 Sun Hydraulics