
740 Series, 24 VDC high-power coil with ISO/DIN 43650, Form A connector with TVS Diode

sunhydraulics.com/model/740224D



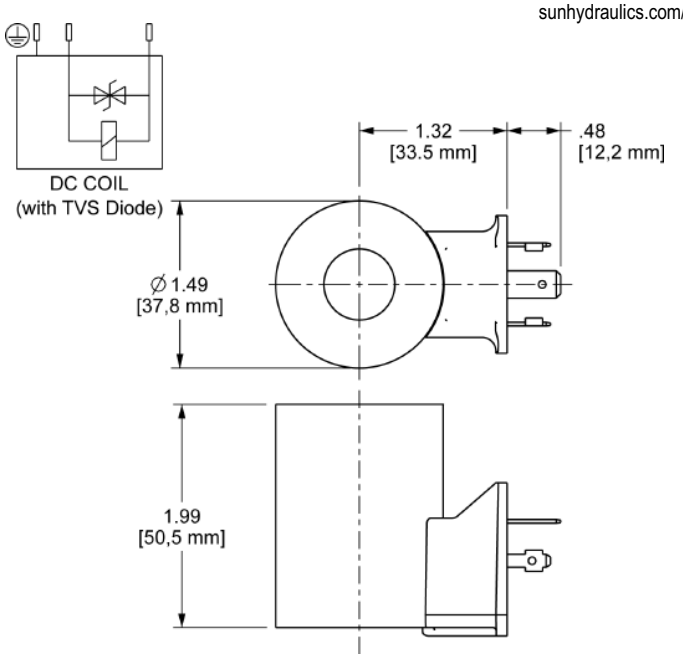

TECHNICAL DATA

Operating Temperature Range	-40 to 230 °F
Arc Suppression (TVS)	Included
Power Consumption (cold) - at rated voltage	25 Watts
Maximum Ambient Temperature	122 °F
Voltage/Frequency	24 VDC
Operating Voltage Range	+10%/-15%
Duty Cycle Rating	100 %
Connector	ISO4400 - EN/DIN175301-803, Form A (ISO/DIN 43650) 3-pin
Coil Nut Torque	4.5 lbf in.

USED WITH

DBAF	DBAFS	DFBF	DFBG	DFCI	DFCJ	DFDI	DFDJ	DFEI	DFEJ
DFFI	DFFJ	DLDF	DLDFS	DMBF	DNBF	DTAF	DTAFS	DTBF	DTCF
DTDF	DTDFS	DWBF	DWDF	FPBF	FPBG	FPBI	FPBJ	FPBU	FREP
PRDF	PRDG	RVCK	RVCL	RVCM	RVCN	991711300	991711600	991712300	991712600
991713030	991713060	991740001	XMD-01	XMD-02					

© 2021 Sun Hydraulics