

MODEL
760224

24 VDC coil with ISO/DIN 43650, Form A connector

sunhydraulics.com/model/760224





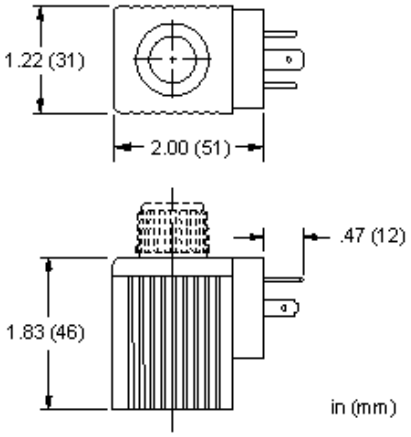

TECHNICAL DATA

Maximum Coil Temperature at 68ºF (20ºC) Ambient	218ºF (105ºC)
Arc Suppression (TVS)	Included
Power Consumption (cold) - at rated voltage	12 watts
Voltage/Frequency	24 VDC
Operating Voltage Range	+/- 20% nominal
Duty Cycle Rating	100 %
Connector	ISO4400 - EN/DIN175301-803, Form A (ISO/DIN 43650) 3-pin
Connector Environment Rating	IP65
Solenoid Tube Diameter	.56 in.
Coil Nut Torque	4.5 lbf in.
Model Weight	0.32 lb.

USED WITH

DAAA DACC DBAA

TECHNICAL FEATURES

- Power cable with mating connector is required and is not included with product.
- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- Encapsulating material: Mineral filled, glass fiber reinforced, epoxy molding compound.
- A metal oxide varistor, SIOV-S07K35, for surge suppression is molded directly into the coil to protect the connected electrical circuits from inductive transients.
- The coil is magnetically symmetrical and can be mounted in either direction on the solenoid tube without affecting performance.
- IP rating is dependent on the coil connector and the mating connector used.
- RoHS compliant. Restricted materials less than 0.1% total by weight.

© 2019 Sun Hydraulics