
MODEL
PVHC

Pilot-operated, pressure reducing/relieving valve with drain to port 4 and drilled piston orifice

SERIES 3 / CAPACITY: 40 gpm / CAVITY: T-23A

sunhydraulics.com/model/PVHC



Externally drained, pilot-operated pressure reducing/relieving valves reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full-flow relief function from port 1 to tank (port 3). Draining the pilot section at port 4 makes these valves insensitive to pressure at tank (port 3) and provides a means for remote control by pilot or 2-way valves.

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
N	Seal Material	Buna-N

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-23A
Series	3
Capacity	40 gpm
Factory Pressure Settings Established at	blocked control port (dead headed)
Maximum Operating Pressure	5000 psi
Control Pilot Flow	15 - 20 in^3/min.
Adjustment - No. of CW Turns from Min. to Max. setting	5
Valve Hex Size	1 1/4 in.
Valve Installation Torque	150 - 160 lbf ft
Adjustment Screw Internal Hex Size	5/32 in.
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990023007
Seal kit - Cartridge	Polyurethane: 990023002
Seal kit - Cartridge	Viton: 990023006
Model Weight	1.55 lb.

CONFIGURATION OPTIONS

Model Code Example: PVHCLAN

CONTROL (L)

- **L** Standard Screw Adjustment
- **C** Tamper Resistant - Factory Set
- **K** Handknob

ADJUSTMENT RANGE (A)

- **A** 100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
- **B** 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting
- **D** 25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting
- **E** 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting
- **H** 30 - 3000 psi (2 - 210 bar), 200 psi (14 bar) Standard Setting
- **J** 25 - 1500 psi (1,7 - 105 bar), 200 psi (14 bar) Standard Setting
- **W** 150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar) Standard Setting

SEAL MATERIAL (N)


- **N** Buna-N
- **V** Viton


TECHNICAL FEATURES

- These valves have the main stage orifice drilled into the piston rather than a staked-in orifice. This allows the valve to survive physically demanding applications.
- Maximum pressure at port 3 should be limited to 3000 psi (210 bar).
- Pilot operated valves exhibit very low dead-band transition between reducing and relieving modes.
- Recommended maximum inlet pressure is determined by the adjustment range. Ranges D, E, N, and Q are tested with a 2000 psi (140 bar) maximum differential between inlet and reduced pressure. Ranges A, B, and H are tested with a 3000 psi (210 bar) maximum differential between inlet and reduced pressure. Ranges C and W are tested with 5000 psi (350 bar) of inlet pressure.
- Pressure at port 4 should not exceed 5000 psi (350 bar).
- Pilot operated valves exhibit exceptionally flat pressure/flow characteristics, are very stable and have low hysteresis.
- Pressure on the drain (port 4) is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- Pilot operated reducing, reducing/relieving valves by nature are not fast acting valves. For superior dynamic response, consider direct acting valves.
- By controlling the pressure at the drain (port 4), the effective setting of the valve can be increased over the nominal valve setting.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

© 2021 Sun Hydraulics

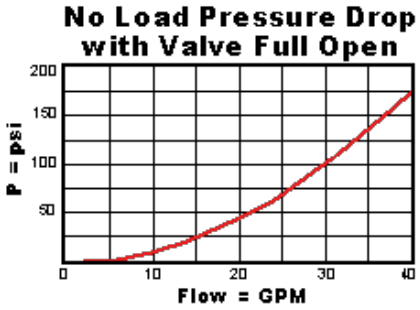

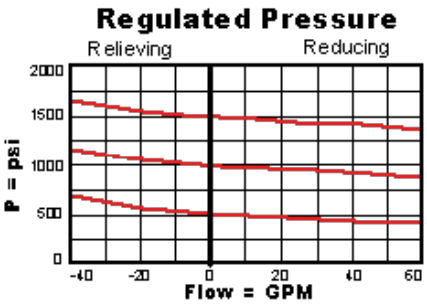

RELATED MODELS

- PVHC8 Model

© 2021 Sun Hydraulics