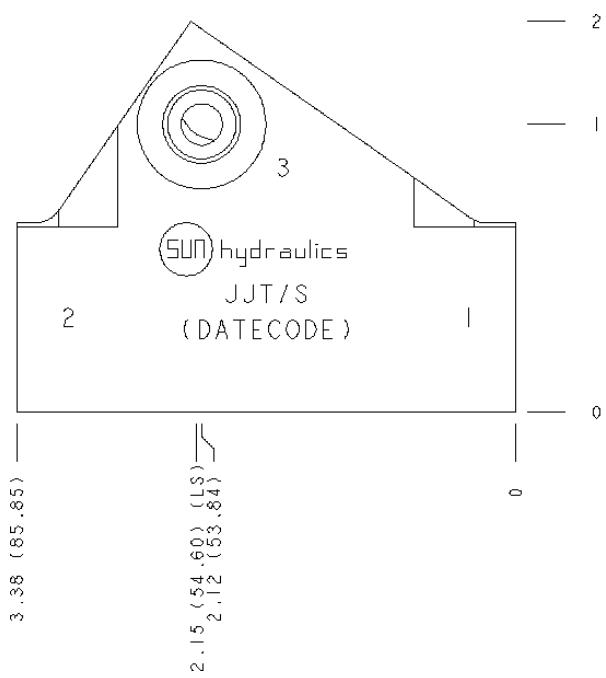



## CONFIGURATION

**/S** Modifier 65-45-12 Ductile Iron, Buna-N, Chem. Black

## TECHNICAL DATA

| | |
|---|---|
| Body Type | Line mount |
| Interface | None |
| Body Features | Inline |
| Mounting Hole Diameter | .28 in. |
| Mounting Hole Depth | Through |
| Mounting Hole Quantity | 2 |
| Open Cavities | 1 |
| Cavity | T-163A |
| Port Size | 1/4" BSPP |
| Model Weight | 2.25 lb. |

## NOTES

***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## PORT DESIGNATORS

| Modifiers | Ports |
|---|---|
| JJT, /10, /11 | All Ports: 1/4" BSPP; |

## CONFIGURATION OPTIONS
## Model Code Example: JJT/S

**MODIFIER (/S)**

**/S** 65-45-12 Ductile Iron, Buna-N, Chem. Black
6061-T651 Aluminum, Buna-N
**/11** 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
**/10** 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
**/S3** 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer


## MANIFOLD FACES

**FACE GRID**

1 2 3 4


© 2020 Sun Hydraulics

## Face 2

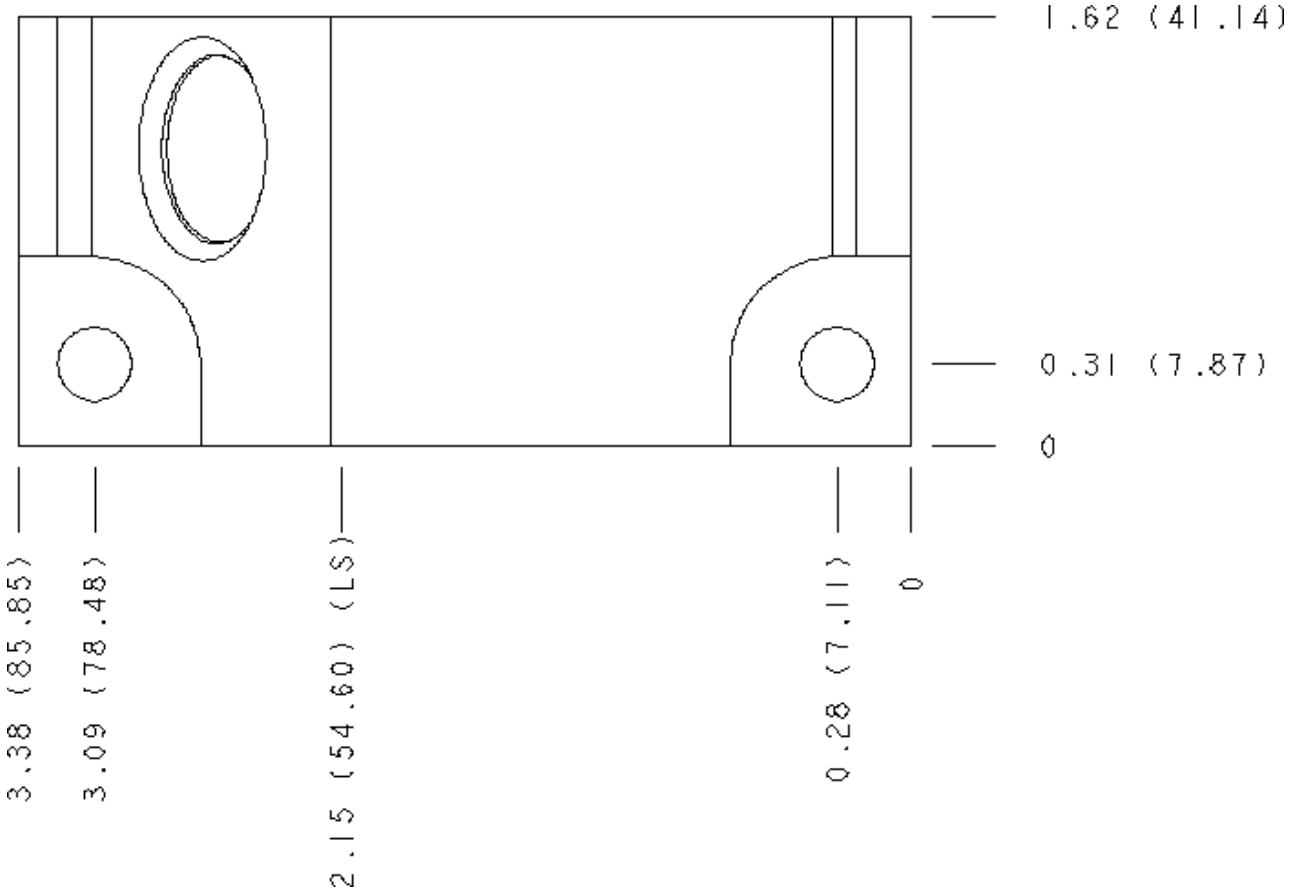



© 2020 Sun Hydraulics

## Face 5

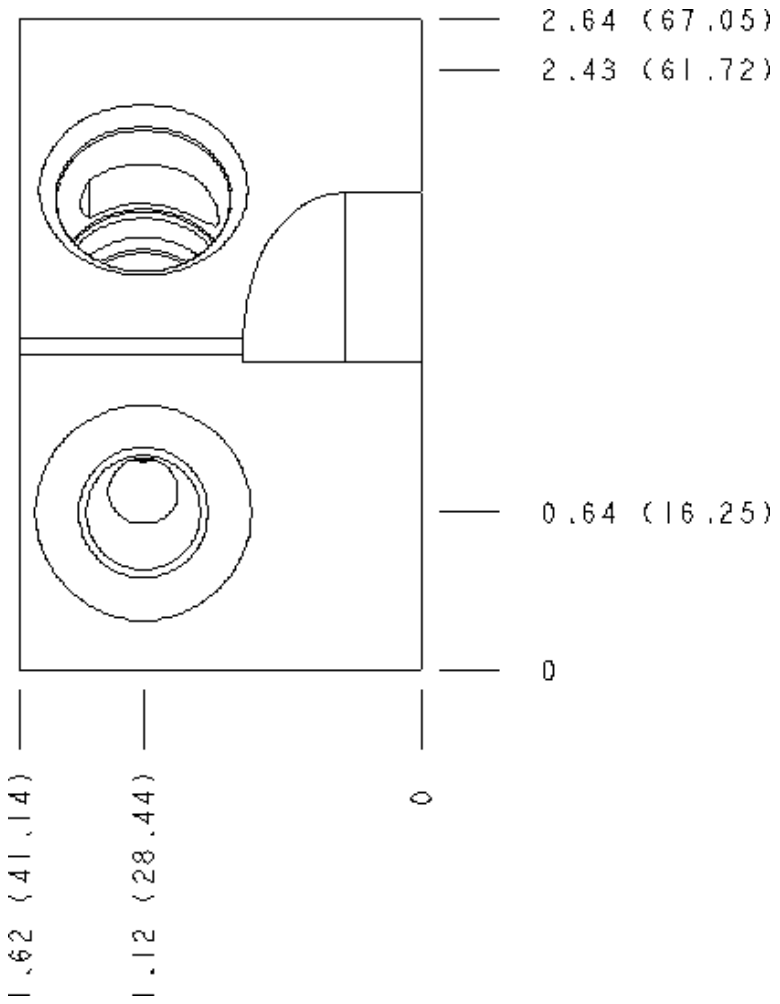



© 2020 Sun Hydraulics

**Face 6**

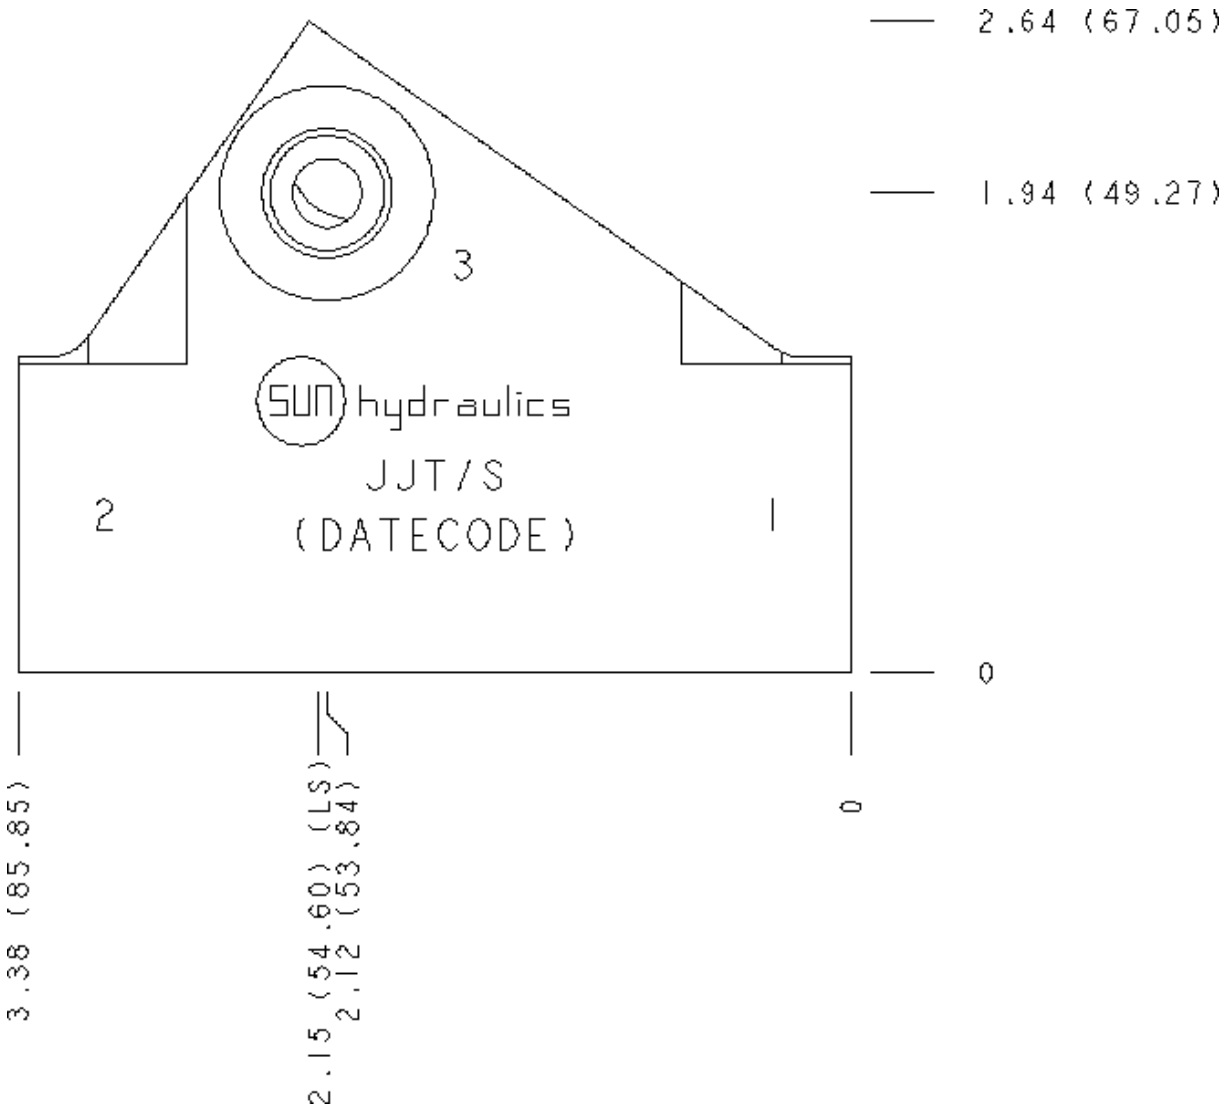


© 2020 Sun Hydraulics

## Face 7

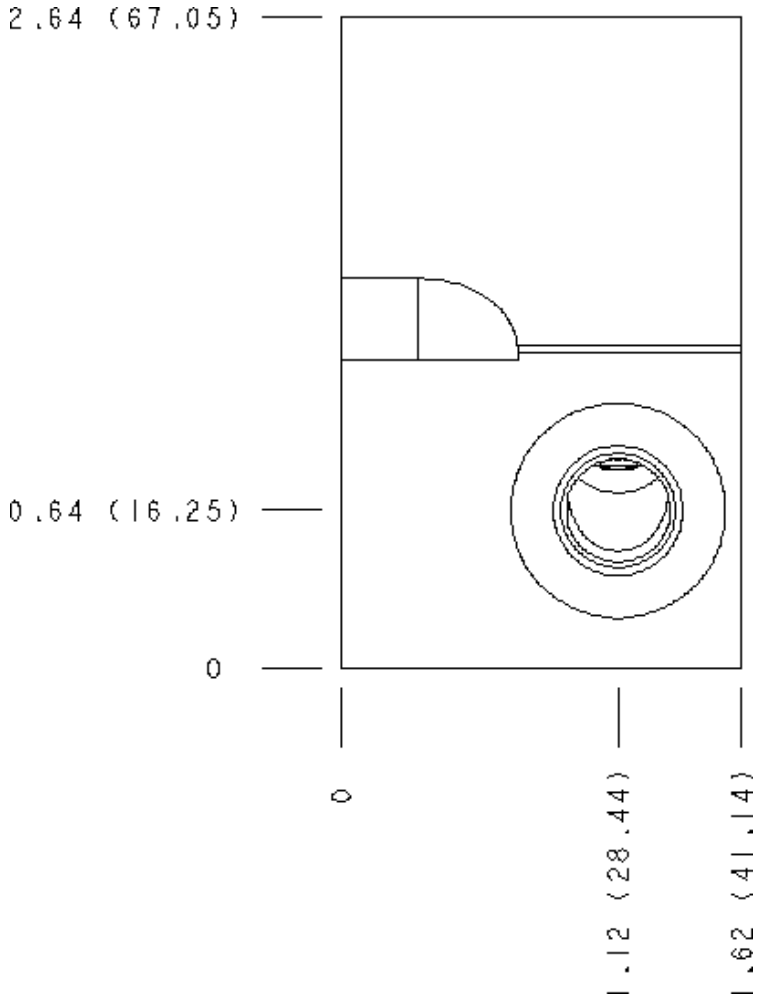


© 2020 Sun Hydraulics