

MODEL
FDEA

Fully adjustable pressure compensated flow control valve with reverse flow check

SERIES 3 / CAPACITY: 25 gpm / CAVITY: T-16A

snhy.com/FDEA



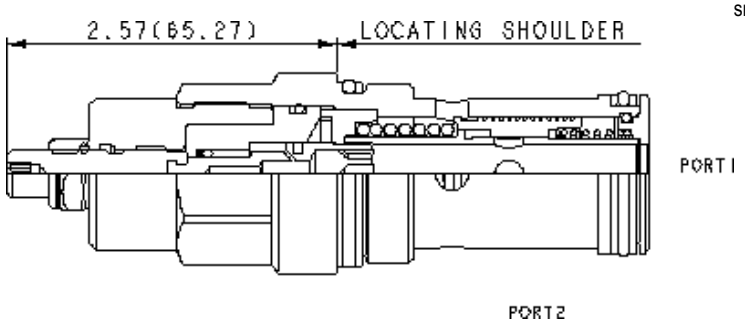

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	.2 - 25 gpm (0,8 - 95 L/min.)
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

Fully adjustable, pressure-compensated flow controls with reverse-flow check provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. They are infinitely adjustable from nearly closed up to the maximum flow. An integral high-capacity check valve provides unrestricted flow from port 2 to port 1.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-16A
Series	3
Capacity	25 gpm
Maximum Operating Pressure	5000 psi
Adjustment - No. of CCW Turns from Fully Closed to Fully Open	5
Valve Hex Size	1 1/4 in.
Valve Installation Torque	150 - 160 lbf ft
Adjustment Screw Internal Hex Size	5/32 in.
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990016007
Seal kit - Cartridge	EPDM: 990016014
Seal kit - Cartridge	Polyurethane: 990016002
Seal kit - Cartridge	Viton: 990016006
Model Weight	1.30 lb.

CONFIGURATION OPTIONS

Model Code Example: FDEALAN


CONTROL (L)	ADJUSTMENT RANGE (A)	SEAL MATERIAL (N)	MATERIAL/COATING
L Standard Screw Adjustment	**A** .2 - 25 gpm (0,8 - 95 L/min.)	**N** Buna-N	Standard Material/Coating
H Calibrated Handknob with Detent Lock	**B** .2 - 16 gpm (0,8 - 60 L/min.)	**E** EPDM	**/LH** Mild Steel, Zinc-Nickel
K Handknob		**V** Viton	
Y Tri-Grip Handknob			


TECHNICAL FEATURES


- All 2-port flow control cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size). However, cartridge extension dimensions from the mounting surface may vary.
- A balanced adjustment mechanism allows for easy adjustment even at high pressures.
- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- Minimum leakage is .2 gpm (0,8 L/min) when the adjustment mechanism is turned to the shut-off position.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.


PERFORMANCE CURVES

© 2019 Sun Hydraulics

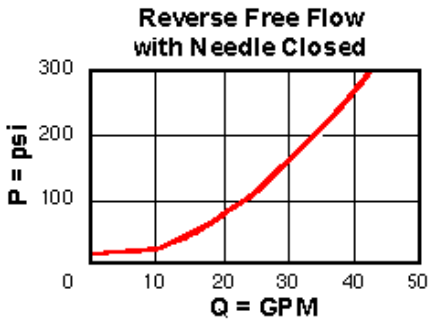

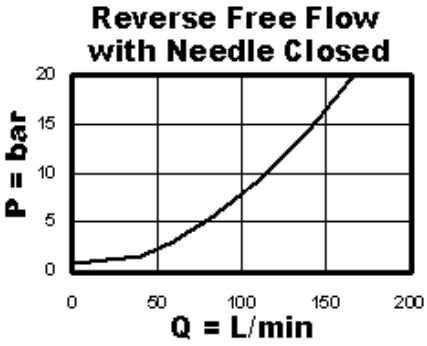

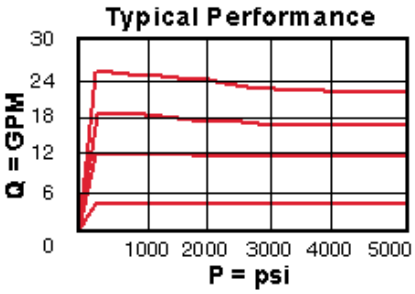

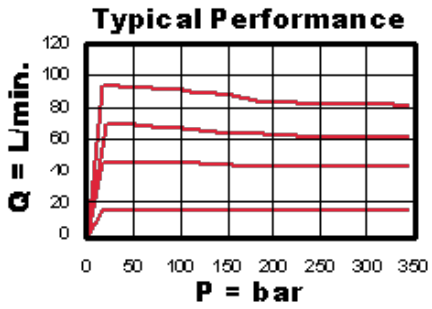

© 2019 Sun Hydraulics