


P5OUTDOOR SMD2727 TECHNICAL PARAMETERS

Unit Module	Item	Parameter
	Model Number	P5RGBO SE 64X32 SMD2727 1/8
	Module size	320mm*160mm
	Module thickness	16mm
	Pixel pitch	5mm
	Pixels Density	40000dots/m2
	Pixel configuration	1R1G1B
	Package mode	SMD2727
	Driving IC	16207 / MBI5124GF
	Pixel resolution	64dots(W)*32dots(H)
	Max Power	30W
	Module thickness	15mm (Without thickness of magnet)
		27mm (including thickness of magnet)
	Weight	0.46kg
	Drive type	Constant drive
	Scan mode	1/16scan
	Port type	HUB75-A
	Refresh rate	1920Hz
	Brightness of white balance	≥5500cd/m2

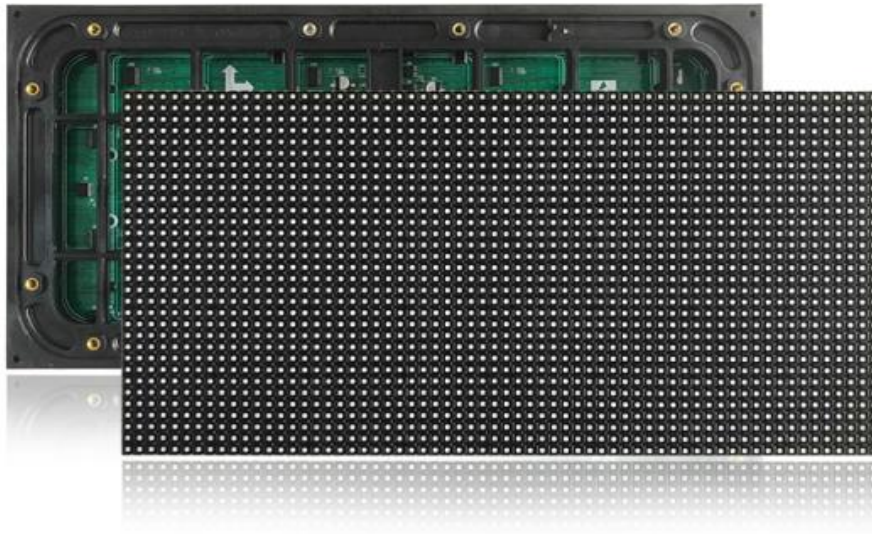

320mm*160mm

LED Cabinet	Dimension	640mm*640mm
	Monomer Module Number	8pcs
	Power supply	5V/60A*1 pcs
	Thermal discharge	fan 1pcs
	Pixel per cabinet	128mm*128mm
	Best viewing distance	5M ~ 30M
	Best viewing angle	160°(W) 120°(H)
	Temperature	storage: -35℃ ~ +85℃ working: -20℃ ~ +50℃
	Relative humidity	10%-95%
	Thickness	85mm

Power	Working voltage	AC220V±10%
	Average Power consumption	<350W/㎡
	Max.Power consumption	<920W/㎡
	Current	<18mA(single LED)

Control system	CPU	Pentium4 or above
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC 恒流驱动
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	>9000hours
	Power switch	Automatic switch