

MUR2005CT-MUR2060CT

20A Super Fast Recovery





奥德利®
AUDLEY

MUR2005CT-MUR2060CT

Features:

- High surge capacity
- Low Forward Voltage Drop.
- High Current Capability.
- Super Fast Switching Speed For High Efficiency

TO-220

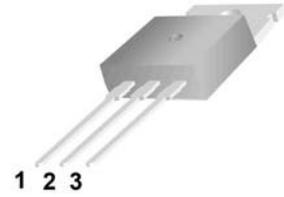

1. Anode 2. Cathode 3. Anode

Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	MUR 2005CT	MUR 2010CT	MUR 2015CT	MUR 2020CT	MUR 2030CT	MUR 2040CT	MUR 2060CT	Unit
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	$V_{R(DC)}$	50	100	150	200	300	400	600	V
Average Rectified Forward Current Total Device, (Rated V_R),	$I_{F(AV)}$	20							A
Nonrepetitive Peak Surge Current(Surge applied at rated load conditions half wave, single phase, 60 Hz)	I_{FSM}	200							A
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	-55 to +155							°C
Maximum Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.0				2.0			°C/W

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	MUR 2005CT	MUR 2010CT	MUR 2015CT	MUR 2020CT	MUR 2030CT	MUR 2040CT	MUR 2060CT	Unit
Forward Voltage (Note 1) ($I_F = 20A, T_C = 25^\circ C$) ($I_F = 20A, T_C = 125^\circ C$)	V_F	0.975 0.895			1.30 1.10		1.70 1.50		V
Maximum Instantaneous Reverse Current (Note 1) (Rated DC Voltage, $T_C = 25^\circ C$) (Rated DC Voltage, $T_C = 125^\circ C$)	I_R	5 250			10 500			μA	
Maximum Reverse Recovery Time ($I_F = 0.5A, I_R = 1.0A, I_{REC} = 0.25A$)	T_{RR}	35							ns

Note 1. Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2.0%

Typical Characteristics







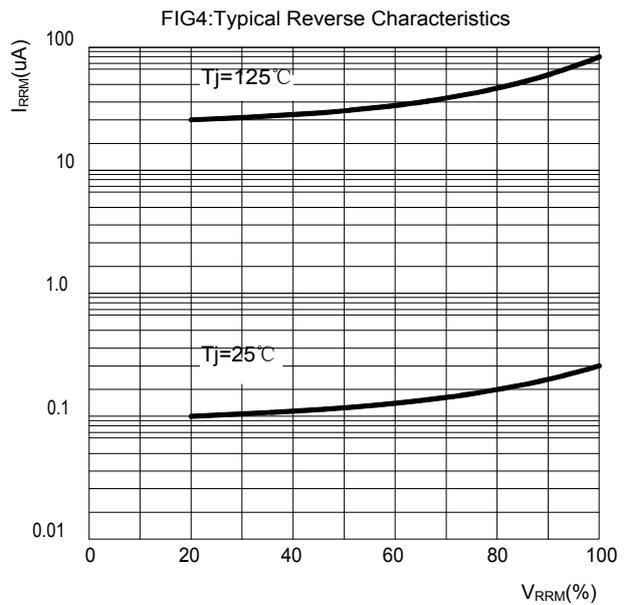


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

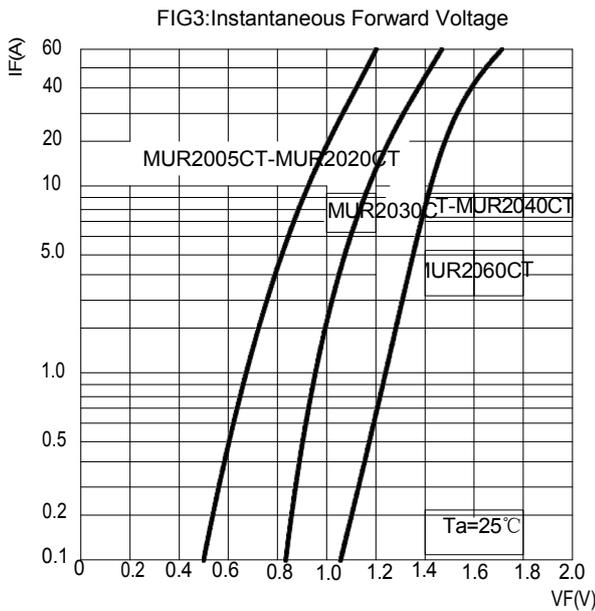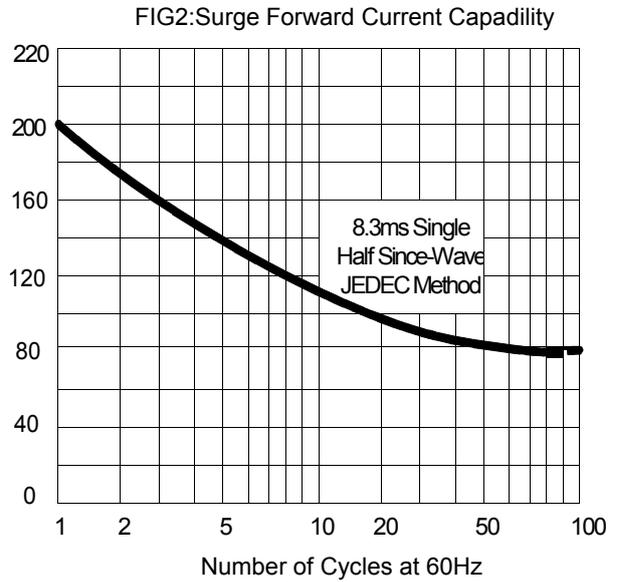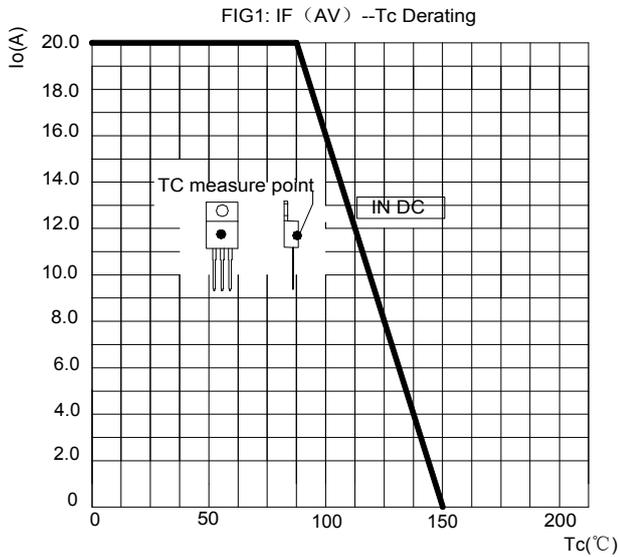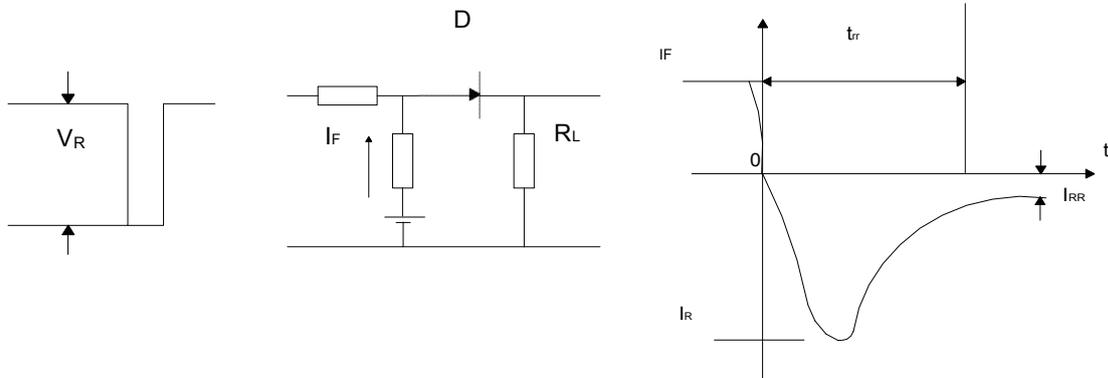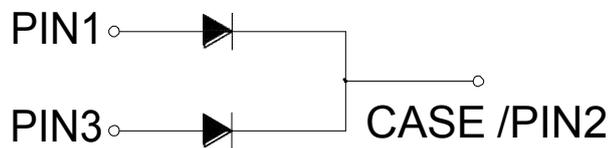

Package Dimension

TO-220

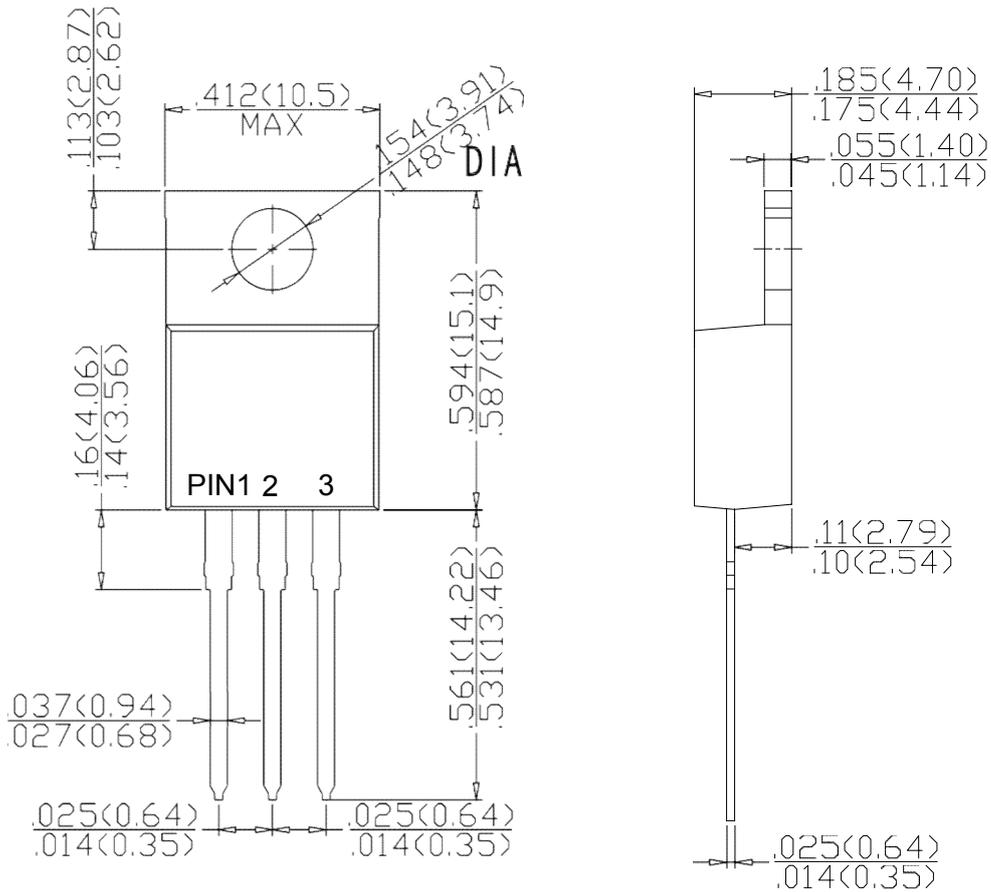

Dimensions in inches and (millimeters)