


AKM

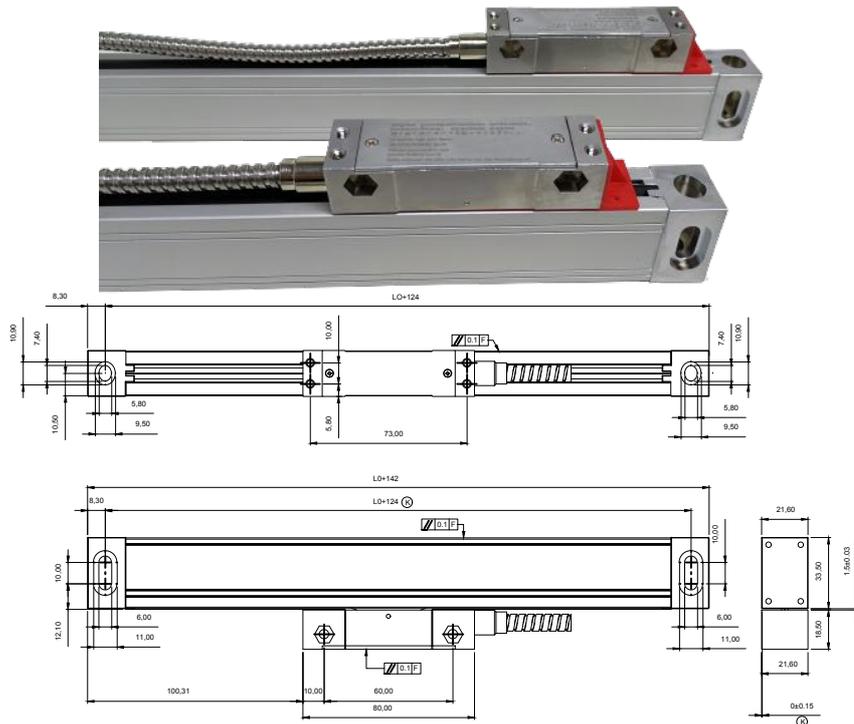

Technical Parameter:

Measuring Range: 50-1100mm
Resolution: 0.5µm , 1µm , 5µm
Grating Pitch: 20µm
Output Signal: 5V TTL / 5V RS42
Cross Section: 21.6*33.5 mm
Accuracy: ±5µm , ±10µm/M
Working Temperature: -10°C--60°C
Storage Temperature: -20°C--70°C
Sealing Protection Class: IP54
Maximum Moving Speed: 60M/Min
Reference Point: Every 50mm
Phase Displacement: 90°±10°

Features:

- 90°NSK brand five bearing sliding structure.
Silky smoothly movement throughout.
- Adopting aviation grade aluminum,
effectively avoid any scale bending.
- Full double sealing structure,swarf and coolant proof.
- Medium size,ideal choice for most normal applications.