

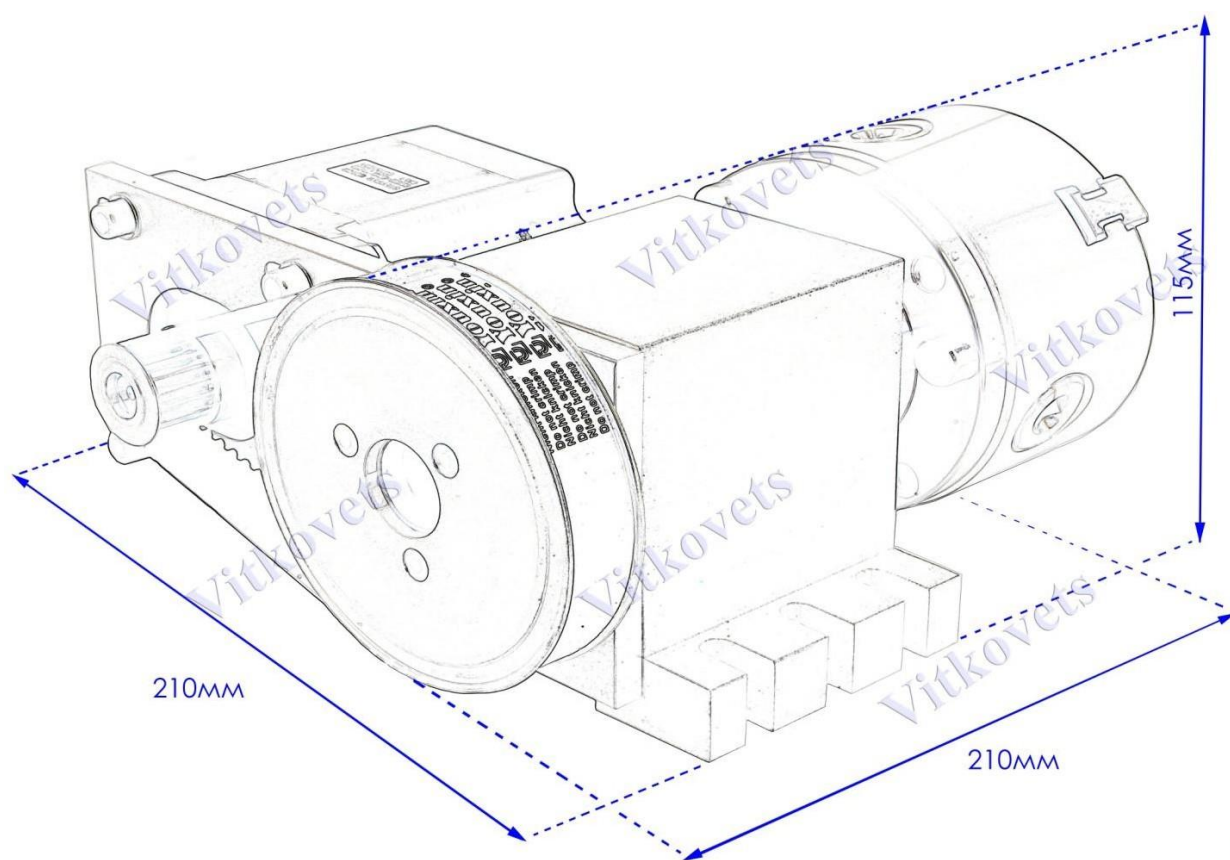
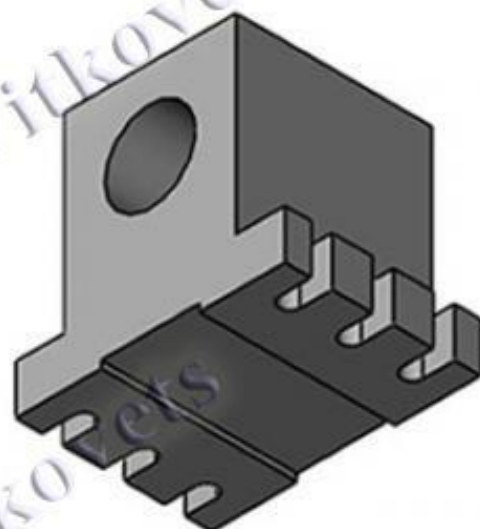


Схематичне креслення:

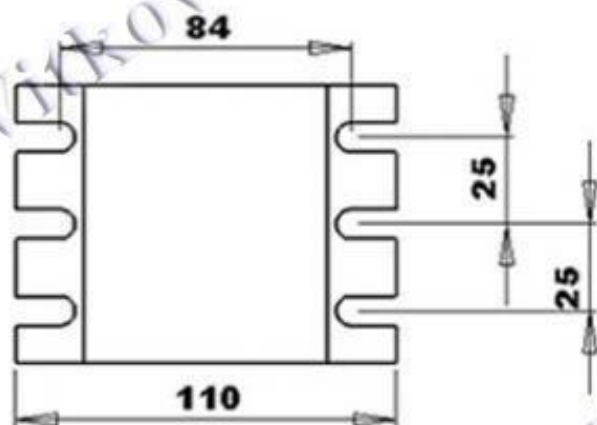

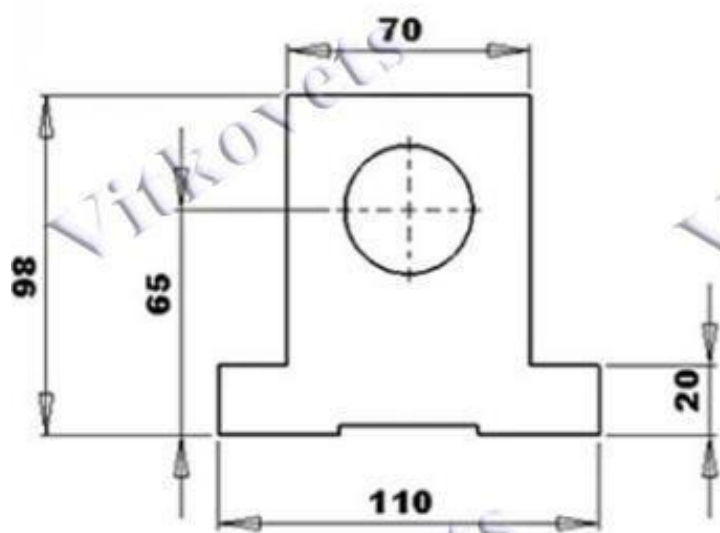

HYBRID STEPPER MOTOR TYPE 86HS-4504A14-D32

SPECIFICATIONS				diagram
step angle	$1.8^{\circ} \pm 5\%$	voltage	1.48V	
phase No.	2	current	4.0A	
insulation resistance	100MOhm(500V DC)	inductance	$3.5 \pm 20\% \text{mH}$	
insulation class	B	resistance	$0.33 \pm 10\% \Omega$	
weight	Kg	holding torque	3.5N.m	

dimensions

unit: mm

