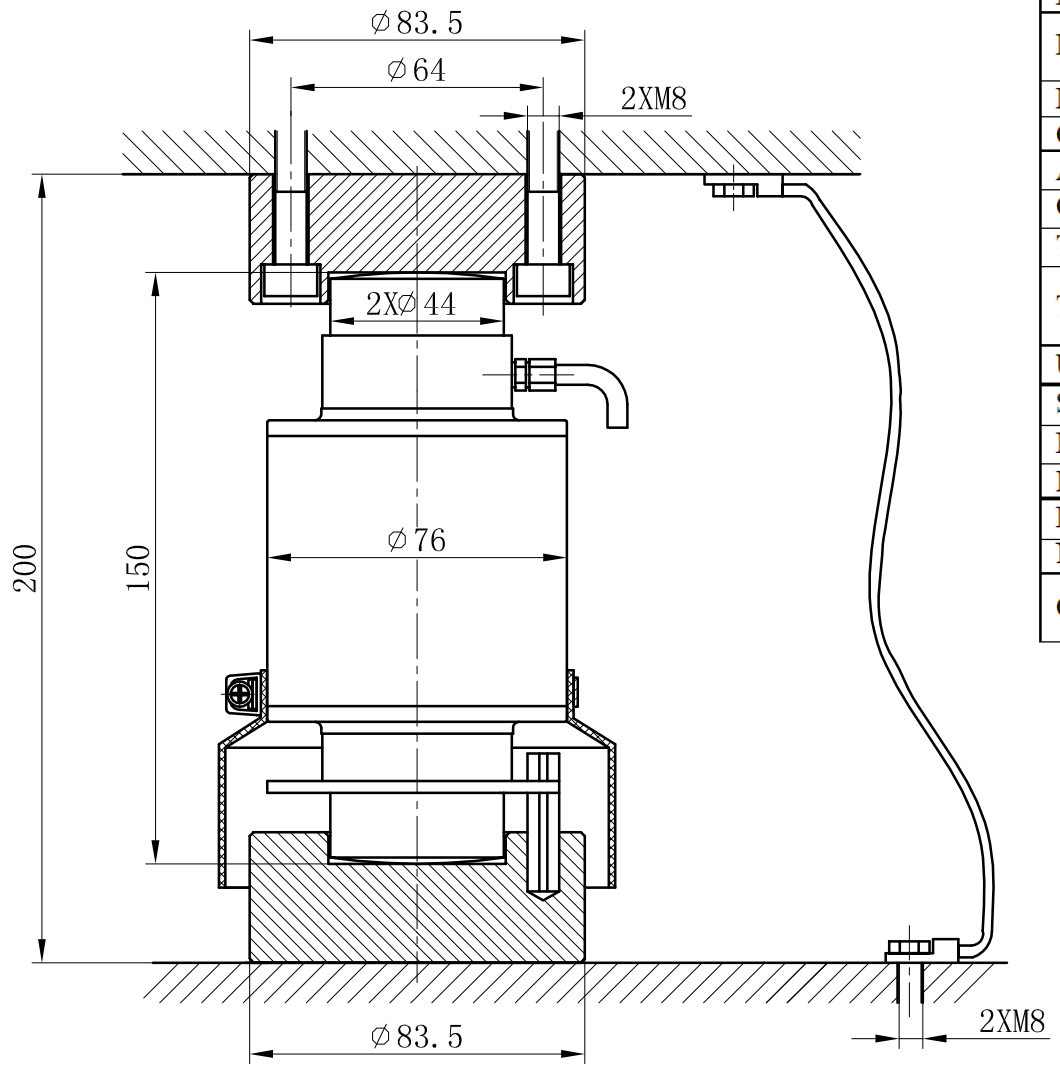

A/D Module Resolutin		100000
Rated load		20,25,30,40,50t
Rated output		20000,25000,30000, 40000,50000
Digital Refurbishing Frepuency		10~15 deg/s
Communication BPS		9600(19200)
Accuracy Class		OIML R60 C5
Creep		±0.01%F.S/30min
TCO		±0.014%F.S/10℃
Tc Span	+20~40℃	±0.0105%F.S/10℃
	-10~+20℃	±0.007%F.S/10℃
Use Temp.Range		-30～+70℃
Safe Overload		150%F.S
Lateral load limit		300%F.S
Environmental Protection		IP68
Recommended Excitation		7～15V DC
Number of the address bus		16 Mux
Construction		Alloy Steel Stainless Steel

Wiring Schematic Diagram

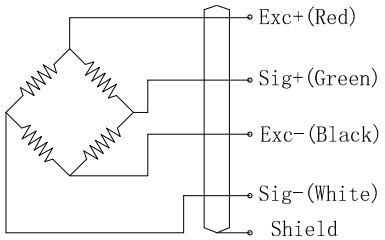

旧底图图号									宁波柯力传感科技股份有限公司
底图总号	标记	处数	分区	更改文件号	签名	年月日			ZSF-AD20~50t ZSF-ADSS20~50t
签字	设计			标准化			图样标记	重量	比例
	校对			会签			A		
日期	审核			审定			共 张	第 张	
	工艺			批准					