



BALL VALVE AUREA STRAIGHT WITH LEVER CONNECTIONS: FEMALE - FEMALE



DESCRIPTION

The ball valves **AUREA**, series 1100, are shut off valves with full bore passage for the dimensions from 1/2" up to 2" and standard passage for the dimensions from 2"1/2 up to 4".

They can be installed in drinking water systems as well as in heating and air conditioning systems. The research to obtain the maximum strength for all components, renders the ball valve **AUREA** a highly reliable and functional device. The special seals enable the valve to work under a constant temperature up to 140°C.

TECHNICAL FEATURES

Pressure:

maximum allowable working pressure 1/2"- 3/4" (PN) 35 bar
maximum allowable working pressure 1 ÷ 4" (PN) 28 bar

Temperature:

maximum working temperature (Ts) from 0°C (excluding ice) to 140°C

Compatible fluids:

water

heat transfer fluids

glycolate solutions

in compliance with Italian national standards UNI 8065 § 6
glycol 50%

Threading:

pipeline connections

threads according to ISO 228/1

Flow coefficient (Kv) (m³/h):

1/2" = 12,7

3/4" = 24,6

1" = 48,5

1"1/4 = 98

1"1/2 = 140

2" = 211

2"1/2 = 240

3" = 269

4" = 461

Tests:

shell tightness

UNI EN 13828

DESIGN

Body and sleeve

Lever

Ball

Other components in brass

O-ring gasket

Seat washers

Other sealing elements

Hexagonal nut

brass EN 12165-CW617N with chrome-plated coating

PVC coating and anti-corrosion treatment steel

brass EN12165-CW617N with chrome-plated coating

brass EN12164-CW614N

FKM rubber

PTFE

PTFE

anti-corrosion treatment steel

PRODUCT CODES

1100.015	female/female	1/2"
1100.020	female/female	3/4"
1100.025	female/female	1"
1100.033	female/female	1" 1/4
1100.042	female/female	1" 1/2

1100.050	female/female	2"
1100.066	female/female	2" 1/2
1100.080	female/female	3"
1100.100	female/female	4"




OFFICINE RIGAMONTI S.p.A.
via Circonvallazione, 9
13018 Valduggia (VC), ITALY
TEL. +39 0163.48165
FAX +39 0163.47254
www.officinerigamonti.it
export@officinerigamonti.it

1100 • 1/2" ÷ 4"

BALL VALVE AUREA STRAIGHT WITH LEVER


CONNECTIONS: FEMALE - FEMALE

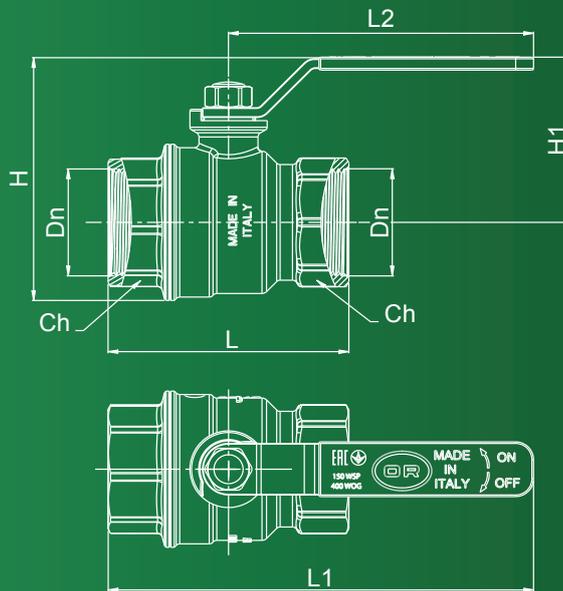

FEATURES

Dn	L [mm]	L1 [mm]	L2 [mm]	H [mm]	H1 [mm]	Ch [mm]
1/2"	53	103	77	51	35	25
3/4"	60	125	95	67	47	31
1"	74	132	95	76	51	38
1"1/4	84	137	95	85	56	47
1"1/2	95	185	137	104	69	54
2"	109	192	137	120	77	66
2" 1/2	146	246	173	154	102	82
3"	160	253	173	169	109	98
4"	207	290	187	207	130	122

HEAD LOSS DIAGRAM

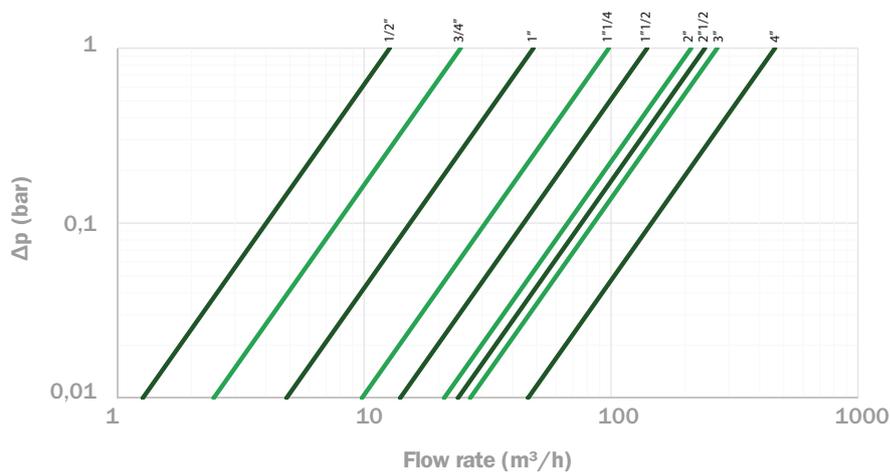

All informations included in this catalogue, technical features, drawings and descriptions, are not binding and might be subject to variation at any time, without any forwarning. Any reproduction, even partially, is forbidden and legally pursuable.

