



M8 male 0° A-cod. screw terminal, 4-pol.

Technical Data	
Wire cross section:	AWG22/max.0,34mmq
Cable \varnothing :	2 – 5 mm
Standard:	IEC 61076-2-104
Rated Voltage:	30 V
Rated Current:	3 A
Insulation:	$\geq 100\text{M}\Omega$ (IEC60512)
Contact resistance:	$\leq 10\text{mohm}$
Fixing screw torque:	min 0,5; max 0,8 N/m
Temperature range:	-30°C...+80°C
Housing Color:	Black
Protection Class:	IP67 (when mounted correctly)
Contact Material:	CuZn gold plated
Overmoulding material:	PA6
Coupling nut material:	CuZn nikel plated
O-Ring Material:	
Contact holder material:	PA6

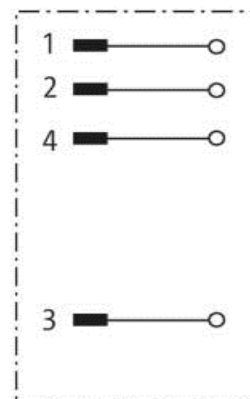

Male

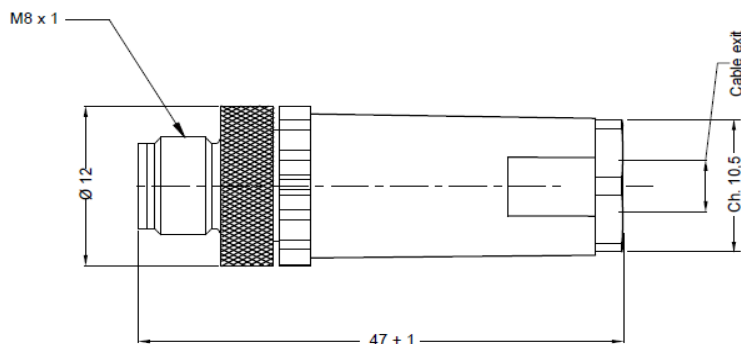

CODIFICA CODICE / CODING CODE
CRM8-4V-P

CRM	8	4	V	P
Series	M12	3 pin	R Female	K Angle
	M8	4 pin	V Male	P Straight
		8 pin		

Vista frontale Face view	Chiave/poli Coding/poles	Tensione Voltage (V)	Corrente max Max current (A)	Caratteristiche Features	Colore testina Housing color
	A/3	60	3	Senza elettronica Without electronics	Nero Black
	A/4	30	3	Senza elettronica Without electronics	Nero Black