


**M12 female 90° A-cod. screw terminal, 4-pol.**

Technical Data	
Wire cross section:	AWG20/max.0,5mmq
Cable Ø:	3 – 6 mm
Standard:	IEC 61076-2-101
Rated Voltage:	250 V
Rated Current:	4 A
Insulation:	≥100MΩ (IEC60512)
Contact resistance:	≤10mohm
Fixing screw torque:	min 0,5; max 0,8 N/m
Temperature range:	-30°C...+80°C
Housing Color:	Black
Protection Class:	IP67 (when mounted correctly)
Contact Material:	CuZn gold plated
Overmoulding material:	PA6
Coupling nut material:	CuZn nikel plated
O-Ring Material:	NBR
Contact holder material:	PA6

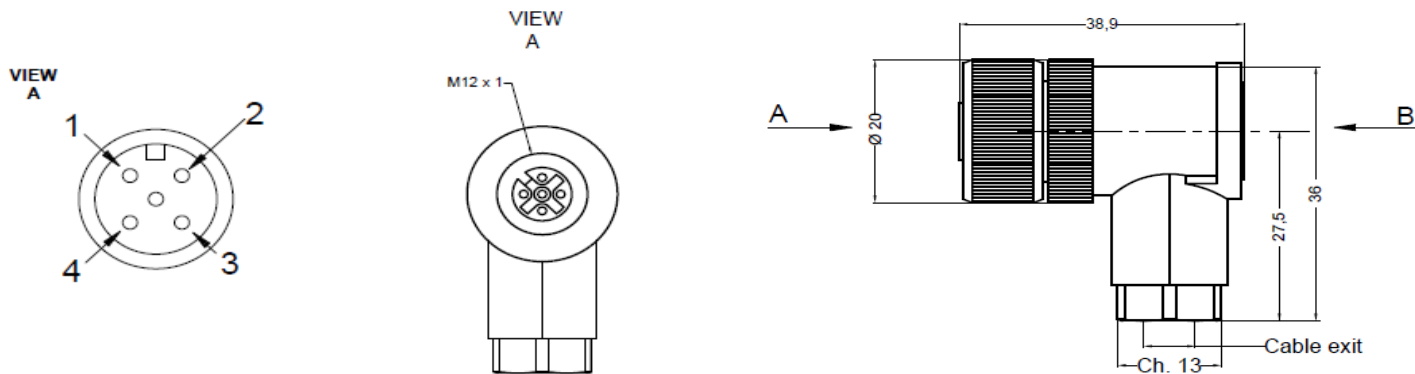

**CODIFICA CODICE / CODING CODE**  
**CRM12-4R-K**

CRM	12	4	R	K
<u>Series</u>	M12 M8	4 pin 5 pin 8 pin	R <u>Female</u> V <u>Male</u>	K <u>Angle</u> P <u>Straight</u>

Vista frontale <i>Face view</i>	Chiave/poli <i>Coding/poles</i>	Tensione <i>Voltage (V)</i>	Corrente max <i>Max current (A)</i>	Colore testina <i>Housing color</i>
	A/4	250	4	Nero <i>Black</i>
	A/5	60	4	Nero <i>Black</i>
	A/8	30	2	Nero <i>Black</i>