




**207991**  
**DCCKR 6.5 V 1.5 PSLK**  
**Inductive proximity sensor**

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

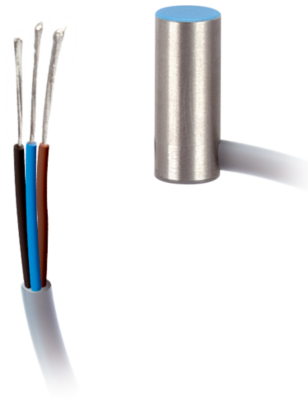

Function														
													CE	

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V
Installation type	Flush
Diameter	Ø 6,5 mm (Diameter)
Housing length	16 mm
Housing material	Stainless steel
Material of cable	PVC
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Cylinder
Product series	INE Extended
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2,4 V
Switching distance (SN)	1,5 mm
Standardized measuring plate	6,5 x 6,5 x 1 mm
Switching hysteresis (max.)	< 15 %
LED Anzeige	Yes
Switching frequency	3.000 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Cable, 2,0 m

More information / accessories	<a href="https://www.di-soric.com/207991">https://www.di-soric.com/207991</a>
--------------------------------	---