



FU-57TZ

Fiber Unit Thrubeam type

Specifications

Model	FU-57TZ*1	
Optical axis diameter (Standard target to be detected)	ø0.5 mm0.02"	
Beam emitting direction	Side	
Fibre unit length	1 m39.37" free-cut	
Fibre unit diameter	ø1.0	
Minimum bend radius	R2 mm0.079" Tough-Flex	
Minimum detectable object	Object with a diameter of 0.005 mm0.0002"*2	
Environmental resistance	Ambient temperature	-40 to +50 °C -40 to 122 °F
Weight	Approx. 5 g	


*1 For details on the detecting distance, see the fiber amplifier catalog.

*2 The minimum detectable object is the value when the detecting distance and sensitivity have been set to their optimal state.

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

FU-57TZ

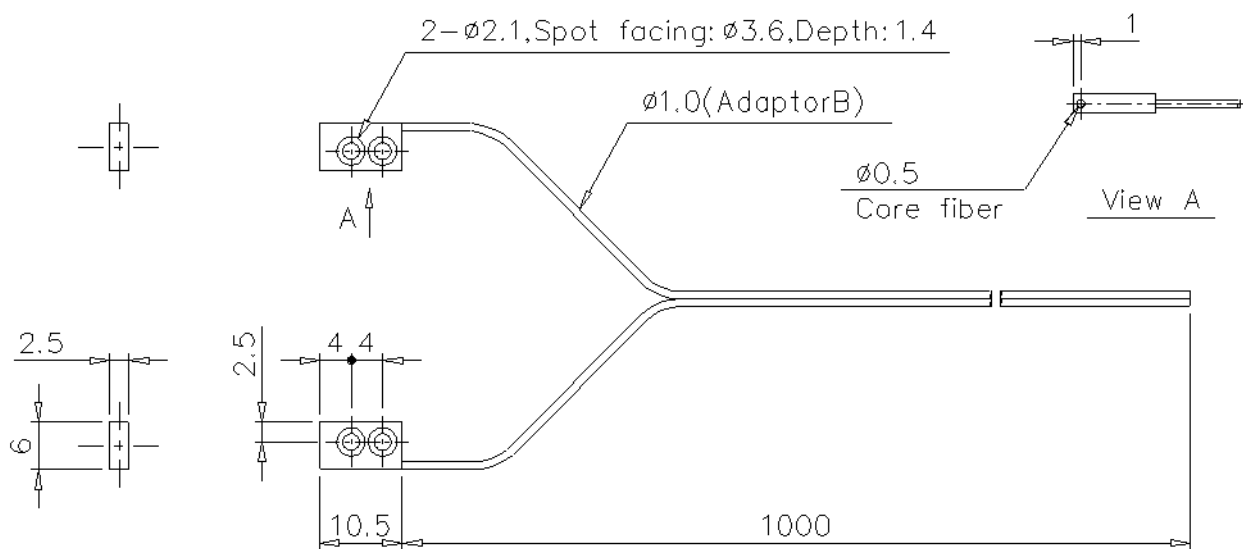

Housing material: SUS303