
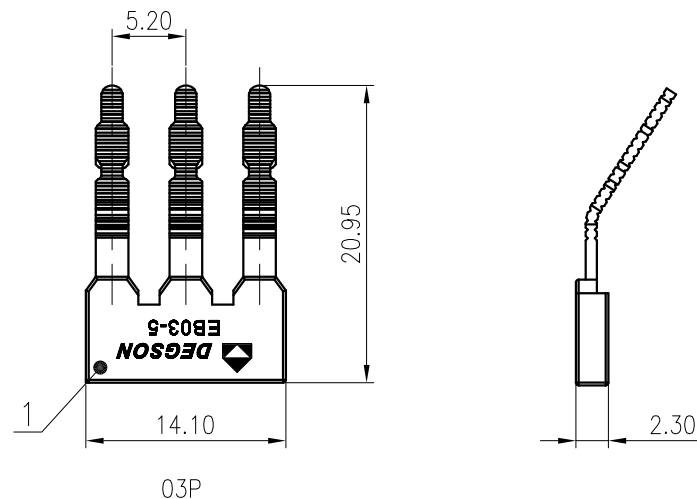


未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A

B


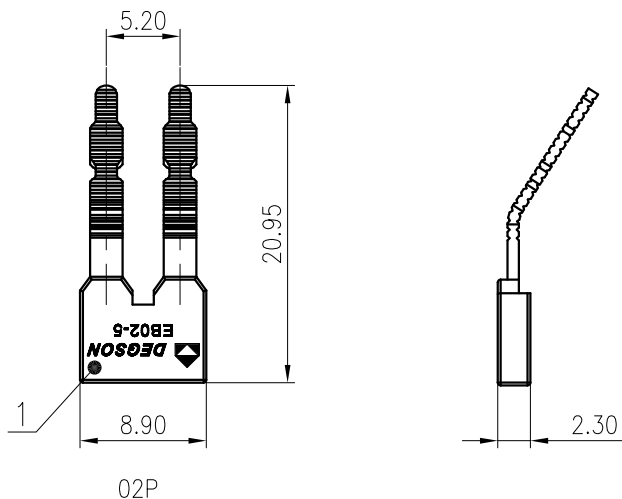


A

B

C

D

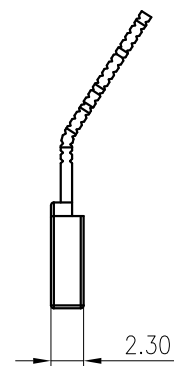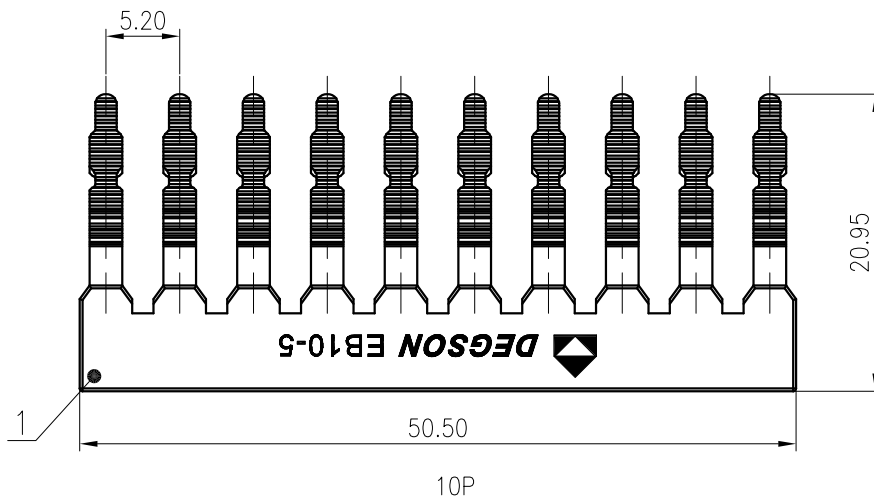

C

D

1	Bridge		
ITEM	NAME OF PART	MATERIAL	NOTES
	间距/Pitch(mm)/线数范围/Poles	5.2/N=02P,03P,10P	
	使用温度范围/Operating temperature(°C)	-40~+105	
	符合RoHS环保要求/Conform to RoHS	Yes	

REV

ECN

DESCRIPTION

DRFT

DATE

MATERIAL: /	SURFACE: /
MAT NO.: /	STATUS: /
APPD: Li GL 2020.06.10	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Mao J 2020.06.10	NAME: EBXX-5-1Y-00A(H)
DRFT: Chen K 2020.06.03	DRAWING NO.: EBXX-5-C01
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 2:1	SHEET 1/1