



EOS

Piazzetta  design

Gas fireplace with hand-worked earthenware surround. Expert craftsmanship has gone into making the earthenware ornamentation. Each surround is a truly unique piece. Also available in double-sided version for gas burning.

SURROUND WEIGHT: 45 kg

GAS BURNING (NATURAL GAS OR LPG) IG 120
 INLET: in grey enamelled steel
 FIREBOX: in Aluker®
 GLASS: ceramic heat resistant up to 750°C
 FUNCTION CONTROL: remote control
 CERAMIC LOGS: standard supply
 HEATING: convection and radiation
 CEILING FLUE GAS OUTLET:
 concentric pipe Ø 10/15 cm
 WALL FLUE GAS OUTLET:
 concentric pipe Ø 13/20 cm
 FIREBOX HEAT OUTPUT: 11.5 kW (Natural gas)
 10.5 kW (LPG)
 THERMAL EFFICIENCY: 80% (Natural gas)
 77% (LPG)
 CONSUMPTION AT RATED HEAT OUTPUT:
 1.1 m³/h (Natural gas)
 790 g/h (LPG)
 WEIGHT: 125 kg
 RATED HEAT OUTPUT: 8.3 kW (Natural gas)
 7.3 kW (LPG)
 TYPE-EXAMINATION: EC certification E0780

OPTIONAL ACCESSORIES:

- river pebles
- height regulation kit

GAS BURNING (NATURAL GAS OR LPG) IG 120B
 INLET: in grey enamelled steel
 FIREBOX: in Aluker®
 GLASS: ceramic heat resistant up to 750°C
 FUNCTION CONTROL: remote control
 CERAMIC LOGS: standard supply
 HEATING: convection and radiation
 CEILING FLUE GAS OUTLET:
 concentric pipe Ø 10/15 cm
 WALL FLUE GAS OUTLET:
 concentric pipe Ø 13/20 cm
 FIREBOX HEAT OUTPUT: 11.5 kW (Natural gas)
 10.5 kW (LPG)
 THERMAL EFFICIENCY: 80% (Natural gas)
 75% (LPG)
 CONSUMPTION AT RATED HEAT OUTPUT:
 1.1 m³/h (Natural gas)
 790 g/h (LPG)
 WEIGHT: 119 kg
 RATED HEAT OUTPUT: 8.3 kW (Natural gas)
 7.3 kW (LPG)
 TYPE-EXAMINATION: EC certification E0780

OPTIONAL ACCESSORIES:

- river pebles
- height regulation kit



WOOD BURNING ME 120/48
 INLET: in enamelled steel
 FIREBOX: in Aluker®
 GRATE: in Aluker® with cast iron grid
 DOOR: rise n'fall with glass ceramic heat resistant up to 750°C, may also be opened as hinged door for cleaning
 PRIMARY AIR: adjustable by hand
 SECONDARY AIR: pre-determined
 SMOKE DAMPER: automatic and adjustable
 ASH DRAWER: removable
 HEATING: natural convection or forced air circulation by Multifuoco System® on request
 FLUE OUTLET: Ø 25 cm
 NOMINAL OUTPUT: 16.5 kW
 THERMAL EFFICIENCY: 75.5%
 NOMINAL CONSUMPTION: 4.8 kg/h
 MAX OUTPUT: 17.3 kW
 MAX CONSUMPTION: 5.4 kg/h
 WEIGHT: 350 kg
 Laboratory measurements were made using beech wood with moisture content below 20%
 Type approval in accordance with EN13230

OPTIONAL ACCESSORIES:

- ventilation kit Multifuoco System® with automatic or manual switching on and off and 4-speed remote control.
- sensor kit for dual Multifuoco System®
- adjustable height kit

DIMENSIONI:

	IG120	IG120B	ME120/48
A	38,5	38,5	65
B	121	121	123,5
C	12,5	19,5	19,5
ø	20	20	25

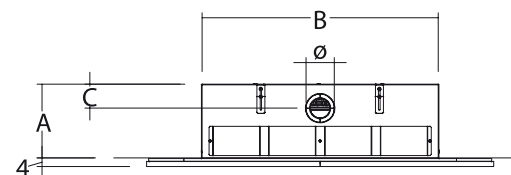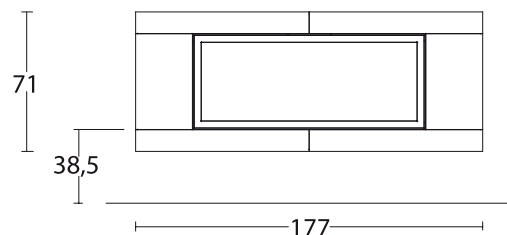

Measurements expressed in cm