


REMS

www.rems.de



Innovative
manufacturer of
machines and tools
for pipe working

2023

Catalogue



Product information



Operating instructions



Parts lists



Product films

REMS App – All product information available any time, anywhere – quickly and easily.

On the building site or at your dealer: All operating instructions, parts lists, product information, product films and more can be called upon immediately*. Many other functions are also available to you.



Scan product logo

Are you standing in front of a REMS product? Just scan the product logo and you will get all the product details.



Scan product illustration

You can scan the product illustrations in our offer brochures and get all the details about the product.



Scan QR code

You can scan the REMS QR code and get all the details about the product.



REMS App














Free application software from the Apple App Store or Android App at Google Play.



*Only with an existing data link via network operator or wifi.



Radial Press Jointing

	Cordless radial press Mini	147
	Pressing tongs Mini	152
	Cropping tongs Mini	181
	Manual radial press	182
	Electric radial press	183
	Electro-hydraulic radial presses	184
	Cordless radial presses	188
	Pressing tongs / pressing rings	198
  	Hold-Harmless and Indemnification Agreement	238
	Cropping tongs	239
	Cable shears	239

REMS Mini-Press 14 V ACC

Cordless radial press 22 kN with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints \varnothing 10–40 mm $7 \varnothing \frac{3}{8} - 1 \frac{1}{4}$

Complete range of REMS pressing tongs Mini/pressing rings for all common pressfitting systems, see page 152–180.

REMS Mini-Press 14 V ACC – universal up to \varnothing 40 mm. Super light, super small, super handy. With automatic circuit control. Secure crimping in seconds. Automatic locking of the pressing tongs.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 152–180). Can be driven by all REMS radial presses 22 kN. Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 180.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

Design

Super light, super small, super handy. Drive unit with battery only 2.4 kg. Drive unit with pressing tongs V22 only 33 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Ergonomically designed housing. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 2.5 or 5.0 Ah capacity for long service life. Light and powerful. Li-Ion 14.4 V, 2.5 Ah batteries for approx. 275 pressings, 5.0 Ah for approx. 550 pressings Viega Profipress DN 15 with one battery charge*. Operating temperature range -10 to $+60$ °C. No memory effect for maximum battery power. Rapid charger 220–240 V, 10.8–18 V, 65 W, for short charging times. Voltage supply 220–240 V/14.4 V, 33 A output, for mains operation instead of Li-Ion battery 14.4 V, as accessory.

Supply format

REMS Mini-Press 14 V ACC Basic-Pack. Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints \varnothing 10–40 mm, $\varnothing \frac{3}{8} - 1 \frac{1}{4}$ ". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 2.5 Ah, rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	Art.-No.
In sturdy steel case.	578012
In L-Boxx system case.	578013

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs Mini/pressing rings see page 152–180.	
REMS cropping tongs Mini for threaded rods see page 181.	
REMS Mini-Press 14 V ACC drive unit, without battery	578001
Battery Li-Ion 14.4 V, 2.5 Ah	571545
Battery Li-Ion 14.4 V, 5.0 Ah	571555
Rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W	571560
Voltage supply 220–240 V/14.4 V, 50–60 Hz, 33 A, for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	578290
L-Boxx system case with inserts	578299



German Quality Product



* Ambient temperature approx. 20°C.

REMS Mini-Press 22 V ACC

Cordless radial press 22 kN with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints \varnothing 10–40 mm / \varnothing $\frac{3}{8}$ – $1\frac{1}{4}$ "

Complete range of REMS pressing tongs Mini/pressing rings for all common pressfitting systems, see page 152–180.

REMS Mini-Press 22 V ACC – universal up to \varnothing 40 mm. Super light, super small, super handy, ultra fast. Pressing under 4 s. Automatic pressing process. With automatic circuit control. Li-Ion 21.6 V, 2.5 Ah battery for approx. 390 pressings Viega Profipress DN 15 with one battery charge*.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 152–180). Can be driven by all REMS radial presses 22 kN. Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 180.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

Design

Super light, super small, super handy. Drive unit with battery only 2.5 kg. Drive unit with pressing tongs V15 only 31 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Swivelling pressing tongs seat, rotation angle $> 360^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking.

Pressing operation with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control). Ultra fast Pressing under 4 s.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 2.5Ah batteries for approx. 390 pressings, 4.4 Ah for approx. 685 pressings, 5.0 Ah for approx. 780 pressings, 9.0 Ah for approx. 1400 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 15A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



German Quality Product



Info



Supply format

REMS Mini-Press 22 V ACC Basic-Pack. Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints \varnothing 10–40 mm, \varnothing $\frac{3}{8}$ –1 $\frac{1}{4}$ ". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 70 W.

Version	Art.-No.
In sturdy steel case.	578010
In L-Boxx system case.	578014

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs Mini/pressing rings see page 152–180.	
REMS cropping tongs Mini for threaded rods see page 181.	
REMS Mini-Press 22 V ACC drive unit, without battery	578002
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240 V, 50–60 Hz, 90 W	571585
Rapid charger 100–240 V, 50–60 Hz, 290 W	571587
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A, for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	578290
L-Boxx system case with inserts	578299
REMS Lumen 2800 22 V, cordless LED flood light, see page 111	



REMS Mini-Press S 22 V ACC

Cordless radial press 22 kN with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints \varnothing 10–40 mm / \varnothing $\frac{3}{8}$ – $\frac{1}{4}$ "

Complete range of REMS pressing tongs Mini/pressing rings for all common pressfitting systems, see page 152–180.

REMS Mini-Press S 22 V ACC – universal up to \varnothing 40 mm. Super light, super small, super handy, ultra fast. Pressing under 4 s. Automatic pressing process. With automatic circuit control. Li-Ion 21.6V, 2.5 Ah battery for approx. 390 pressings Viega Profipress DN 15 with one battery charge*.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 152–180). Can be driven by all REMS radial presses 22 kN. Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 180.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

Design

Super light, super small, super handy. Drive unit with battery only 2.6 kg. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Swivelling pressing tongs seat, rotation angle $>360^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking.

Pressing operation with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control). Ultra fast Pressing under 4 s.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 2.5 Ah batteries for approx. 390 pressings, 4.4 Ah for approx. 685 pressings, 5.0 Ah for approx. 780 pressings, 9.0 Ah for approx. 1400 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 15A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



German Quality Product





Supply format

REMS Mini-Press S 22V ACC Basic-Pack. Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints \varnothing 10–40 mm, \varnothing $\frac{3}{8}$ –1 $\frac{1}{4}$ ". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 70 W.

Version	Art.-No.
In sturdy steel case.	578015
In L-Boxx system case.	578016

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs Mini/pressing rings see page 152 – 180.	
REMS cropping tongs Mini for threaded rods see page 181.	
REMS Mini-Press S 22V ACC drive unit, without battery	578003
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240 V, 50–60 Hz, 90 W	571585
Rapid charger 100–240 V, 50–60 Hz, 290 W	571587
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A, for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	578290
L-Boxx system case with inserts	578299
REMS Lumen 2800 22V, cordless LED flood light, see page 111	



for all common pressfitting systems

**Select REMS pressing tongs Mini/
REMS pressing rings yourself!**

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the REMS pressing tongs Mini/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Can be driven by all REMS radial presses 22 kN. Adapter tongs (page 180) required for driving REMS (PR) pressing rings.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs Mini (PZ-2B)

REMS Mini pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

REMS Mini ACz, Fz, HEz, RFz, RFlz pressing tongs with teeth prevent formation of burr on the pressfitting (**Patent EP 2 027 971**).

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 180.

Traceability according to EN 1775:2007

REMS pressing tongs Mini with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



German Quality Product



REMS Mini pressing tongs (PZ-2B)



REMS pressing ring S (PR-2B), continuously swivellable

Confirmation of suitability

See page 237.

Hold-Harmless and Indemnification Agreement

See page 238.





Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs Mini V: "V" imprint on pressed fitting for traceability according to EN 1775:2007

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
A				
AC-FIX PRESS (Global Piping Systems)	H 12		578396	
	H 16		578400	
	H 20		578406	
	H 25		578408	
	H 32		578412	
	RFz 12		578490	
	RFz 16		578492	
	RFz 20		578494	
	RFz 25		578496	
	RFz 32		578498	
	U 16		578374	
	U 20		578378	
	U 25		578380	
	U 32		578382	
	VX 16		578552	
	VX 20		578554	
	AC-FIX PRESS DUO (Global Piping Systems)	RFz 16		578492
		RFz 20		578494
		RFz 25		578496
		RFz 32		578498
TH 16			578352	
TH 20			578358	
TH 25			578360	
TH 26			578362	
TH 32			578364	
TH 16 S (PR-2B)		Mini Z8	574782	
TH 20 S (PR-2B)		Mini Z8	574788	
TH 26 S (PR-2B)		Mini Z8	574794	
TH 32 S (PR-2B)		Mini Z8	574798	
U 16			578374	
U 20			578378	
U 25			578380	
U 32		578382		
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16		578400	
	H 18		578404	
	H 20		578406	
	H 25		578408	
	H 32		578412	
	RFz 16		578492	
	RFz 20		578494	
	RFz 25		578496	
	RFz 32		578498	
	U 16		578374	
	U 18		578376	
	U 20		578378	
U 25		578380		
U 32		578382		
ACOME ACOPEX ALU	H 16		578400	
	H 20		578406	
	H 26		578410	
	H 32		578412	
	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
U 16		578374		
U 20		578378		
U 32		578382		
ACOME MT	ACz 12		578608	
	ACz 16		578610	
	ACz 20		578612	
	ACz 25		578614	
AHLSELL A-press elförzinkad M	M 12		578310	
	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
M 28 S (PR-2B)	Mini Z8	574744		
M 35 S (PR-2B)	Mini Z8	574746		
AHLSELL A-press elförzinkad V	V 12		578324	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	AHLSELL A-press koppar M	M 12		578310
		M 15		578312
M 18			578314	
M 22			578316	
M 28			578318	
M 35			578390	
M 12 S (PR-2B)		Mini Z8	574736	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)		Mini Z8	574740	
M 22 S (PR-2B)		Mini Z8	574742	
M 28 S (PR-2B)		Mini Z8	574744	
M 35 S (PR-2B)		Mini Z8	574746	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AHLSELL A-press koppar V	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
AHLSELL A-press rostfritt	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
AIRBEL PRESSCLIM	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
AIRBEL SERTINOX	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
ALB Sistema Multicapa	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
H 32		578412	
U 16		578374	
U 18		578376	
U 20		578378	
C 26		578392	
U 32		578382	
U 40		578386	
ALB Sistema Multicapa Gas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	H 16		578400
	H 20		578406
H 26		578410	
H 32		578412	
U 16		578374	
U 20		578378	
C 26		578392	
U 32		578382	
ALTECH Altech	RFz 12		578490
	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
APE MULTYGAS Serie AP Gas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
APE Serie AP	B 16		578468
	B 20		578472
	B 26		578474
	B 32		578476
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
U 16		578374	
U 20		578378	

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
APE Serie APL	H 16		578400	ASSOTHERM IPC-RAC Carbon Steel	M 15		578312
	H 18		578404		M 18		578314
	H 20		578406		M 22		578316
	H 26		578410		M 28		578318
	H 32		578412		M 35		578390
	TH 16		578352		M 15 S (PR-2B)	Mini Z8	574738
	TH 18		578356	M 18 S (PR-2B)	Mini Z8	574740	
	TH 20		578358	M 22 S (PR-2B)	Mini Z8	574742	
	TH 26		578362	M 28 S (PR-2B)	Mini Z8	574744	
	TH 32		578364	M 35 S (PR-2B)	Mini Z8	574746	
	TH 40		578624				
	TH 16 S (PR-2B)	Mini Z8	574782	ASSOTHERM IPI-RAX Inox	M 15		578312
	TH 20 S (PR-2B)	Mini Z8	574788	M 18		578314	
	TH 26 S (PR-2B)	Mini Z8	574794	M 22		578316	
	TH 32 S (PR-2B)	Mini Z8	574798	M 28		578318	
	U 16		578374	M 35		578390	
	U 18		578376	M 15 S (PR-2B)	Mini Z8	574738	
	U 20		578378	M 18 S (PR-2B)	Mini Z8	574740	
			578378	M 22 S (PR-2B)	Mini Z8	574742	
			578378	M 28 S (PR-2B)	Mini Z8	574744	
		578378	M 35 S (PR-2B)	Mini Z8	574746		
AQUATECHNIK Press-fitting metal	H 16		578400	ASSOTHERM IPI-RAX Inox Gas	M 15		578312
	H 20		578406		M 18		578314
	H 26		578410		M 22		578316
	H 32		578412		M 28		578318
	TH 16		578352		M 35		578390
	TH 20		578358		M 15 S (PR-2B)	Mini Z8	574738
	TH 26		578362	M 18 S (PR-2B)	Mini Z8	574740	
	TH 32		578364	M 22 S (PR-2B)	Mini Z8	574742	
	TH 16 S (PR-2B)	Mini Z8	574782	M 28 S (PR-2B)	Mini Z8	574744	
	TH 20 S (PR-2B)	Mini Z8	574788	M 35 S (PR-2B)	Mini Z8	574746	
	TH 26 S (PR-2B)	Mini Z8	574794				
	TH 32 S (PR-2B)	Mini Z8	574798	ASSOTHERM IPM-Multistrato	H 16		578400
	U 16		578374	H 20		578406	
	U 20		578378	H 26		578410	
	C 26		578392	H 32		578412	
	U 32		578382	TH 16		578352	
			578382	TH 20		578358	
			578382	TH 26		578362	
			578382	TH 32		578364	
			578382	THL 32		578368	
		578382	TH 40		578624		
		578382	TH 16 S (PR-2B)	Mini Z8	574782		
		578382	TH 20 S (PR-2B)	Mini Z8	574788		
		578382	TH 26 S (PR-2B)	Mini Z8	574794		
		578382	TH 32 S (PR-2B)	Mini Z8	574798		
		578382	U 16		578374		
		578382	U 20		578378		
		578382	C 26		578392		
		578382	U 32		578382		
AQUATECHNIK Universal	B 16		578468	ASSOTHERM IPR-RRR Copper	M 15		578312
	B 20		578472		M 18		578314
	B 26		578474		M 22		578316
	B 32		578476		M 28		578318
	F 16		578456		M 35		578390
	F 20		578460		M 15 S (PR-2B)	Mini Z8	574738
	F 26		578462	M 18 S (PR-2B)	Mini Z8	574740	
	F 32		578464	M 22 S (PR-2B)	Mini Z8	574742	
	F 16 S (PR-2B)	Mini Z8	574728	M 28 S (PR-2B)	Mini Z8	574744	
	F 20 S (PR-2B)	Mini Z8	574730	M 35 S (PR-2B)	Mini Z8	574746	
	F 26 S (PR-2B)	Mini Z8	574732				
	F 32 S (PR-2B)	Mini Z8	574734	ASSOTHERM IPR-RRR Copper Gas	M 15		578312
	H 16		578400	M 18		578314	
	H 20		578406	M 22		578316	
	H 26		578410	M 28		578318	
	H 32		578412	M 35		578390	
	TH 16		578352	M 15 S (PR-2B)	Mini Z8	574738	
	TH 20		578358	M 18 S (PR-2B)	Mini Z8	574740	
	TH 26		578362	M 22 S (PR-2B)	Mini Z8	574742	
	TH 32		578364	M 28 S (PR-2B)	Mini Z8	574744	
TH 16 S (PR-2B)	Mini Z8	574782	M 35 S (PR-2B)	Mini Z8	574746		
TH 20 S (PR-2B)	Mini Z8	574788					
TH 26 S (PR-2B)	Mini Z8	574794	ASSOTHERM IPR-RRR Copper Gas	M 15		578312	
TH 32 S (PR-2B)	Mini Z8	574798	M 18		578314		
U 16		578374	M 22		578316		
U 20		578378	M 28		578318		
C 26		578392	M 35		578390		
U 32		578382	M 15 S (PR-2B)	Mini Z8	574738		
		578382	M 18 S (PR-2B)	Mini Z8	574740		
		578382	M 22 S (PR-2B)	Mini Z8	574742		
		578382	M 28 S (PR-2B)	Mini Z8	574744		
		578382	M 35 S (PR-2B)	Mini Z8	574746		
ARKA DUROsystem	H 16		578400	ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"		578534
	H 20		578406		US 1/2"		578536
	H 25		578408		US 3/4"		578538
	H 26		578410		US 1"		578540
	H 32		578412				
	TH 16		578352		ATUSA ITALIA SYCPRESS	M 15	
	TH 20		578358	M 18		578314	
	TH 25		578360	M 22		578316	
	TH 26		578362	CARBON STEEL	M 28		578318
	TH 32		578364	PRESS FITTINGS	M 35		578390
	TH 16 S (PR-2B)	Mini Z8	574782	M 15 S (PR-2B)	Mini Z8	574738	
	TH 20 S (PR-2B)	Mini Z8	574788	M 18 S (PR-2B)	Mini Z8	574740	
	TH 26 S (PR-2B)	Mini Z8	574794	M 22 S (PR-2B)	Mini Z8	574742	
	TH 32 S (PR-2B)	Mini Z8	574798	M 28 S (PR-2B)	Mini Z8	574744	
	U 16		578374	M 35 S (PR-2B)	Mini Z8	574746	
	U 20		578378				
			578378	ATUSA ITALIA SYCPRESS	M 15		578312
			578378	M 18		578314	
			578378	STAINLESS STEEL	M 22		578316
			578378	PRESS FITTINGS	M 28		578318
		578378	M 35		578390		
		578378	M 15 S (PR-2B)	Mini Z8	574738		
		578378	M 18 S (PR-2B)	Mini Z8	574740		
		578378	M 22 S (PR-2B)	Mini Z8	574742		
		578378	M 28 S (PR-2B)	Mini Z8	574744		
		578378	M 35 S (PR-2B)	Mini Z8	574746		
Aschl NIR	M 15		578312				
	M 18		578314				
	M 22		578316				
	M 28		578318				
	M 35		578390				
	M 15 S (PR-2B)	Mini Z8	574738				
	M 18 S (PR-2B)	Mini Z8	574740				
	M 22 S (PR-2B)	Mini Z8	574742				
	M 28 S (PR-2B)	Mini Z8	574744				
	M 35 S (PR-2B)	Mini Z8	574746				

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
AYOR FIXOCONNECT Press	H 12		578396
	H 16		578400
	H 20		578406
	H 25		578408
	Rfz 12		578490
	Rfz 16		578492
	Rfz 20		578494
	Rfz 25		578496
	U 16		578374
	U 20		578378
	U 25		578380
AYOR FIXOMULTIX	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 20		578378
U 32		578382	
U 40		578386	
AYOR SOMATHERM FOR YOU -1	H 16		578400
	H 20		578406
	H 26		578410
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	U 16		578374
U 20		578378	
AYOR SOMATHERM FOR YOU -2	H 12		578396
	H 16		578400
	H 20		578406
	H 25		578408
	Rfz 12		578490
	Rfz 16		578492
	Rfz 20		578494
	Rfz 25		578496
	U 16		578374
	U 20		578378
U 25		578380	
B			
Bampi BALPEX serie LP	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 18		578376
	U 20		578378
	C 26		578392
U 32		578382	
Bampi BALPEX serie MP	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
Bampi BALPEX Gas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
BARBI EASYPRESS (Industrial Blansol)	H 12		578396
	H 16		578400
	H 20		578406
	H 25		578408
	H 32		578412
	Rfz 12		578490
	Rfz 16		578492
	Rfz 20		578494
	Rfz 25		578496
	Rfz 32		578498
	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
BARBI MULTIPLEX (Industrial Blansol)	H 14		578398
	H 16		578400
	H 18		578404
	H 20		578406
	H 25		578408
	H 26		578410
	H 32		578412
	Rfz 16		578492
	Rfz 18		578638
	Rfz 20		578494
	Rfz 25		578496
	Rfz 32		578498
	TH 16		578352
	TH 20		578358
TH 26		578362	
TH 32		578364	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
U 16		578374	
U 18		578376	
U 20		578378	
U 25		578380	
U 32		578382	
U 40		578386	
BEGETUBE/ IVAR	B 14		578466
	B 16		578468
	B 18		578470
	B 20		578472
	B 26		578474
	B 32		578476
Béné inox Série 41	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
M 35 S (PR-2B)	Mini Z8	574746	
Brass Form Master Press	H 16		578400
	H 18		578404
	H 20		578406
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	U 16		578374
	U 18		578376
U 20		578378	
Brass & Fittings PRESSMAN MultiPress	Rfz 16		578492
	Rfz 18		578638
	Acz 20		578612
	Rfz 25		578496
	Rfz 32		578498
Brass & Fittings PRESSMAN RetiPress	Rfz 16		578492
	Rfz 18		578638
	Acz 20		578612
	Rfz 25		578496
	Rfz 32		578498
BRASSTECH MULTIthermoSAN Brasspress	B 16		578468
	B 20		578472
	B 26		578474
	B 32		578476
	F 16		578456
	F 20		578460
	F 26		578462
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
TH 16		578352	
TH 18		578356	
TH 20		578358	
TH 26		578362	
TH 32		578364	
TH 40		578624	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
U 16		578374	
U 18		578376	
U 20		578378	
C 26		578392	
U 32		578382	

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
C			
Cello Products -B->Press	VUS ½" (OD 15,9 mm)		578566
	VUS ¾" (OD 22,2 mm)		578568
	VUS 1" (OD 28,6 mm)		578570
	VUS 1¼" (OD 34,9 mm)		578606
CGR DYNAFLU multicouche	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
U 20		578378	
U 32		578382	
U 40		578386	
CGR DYNAFLU PER	H 12		578396
	H 16		578400
	H 20		578406
	H 25		578408
	RFz 12		578490
RFz 16		578492	
RFz 20		578494	
RFz 25		578496	
CHIALI CHIALIPEX	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
Climatek Clima Therm	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
Climatrix Climatrix Rhinopex	TH 32		578364
	H 16		578400
	H 20		578406
	U 16		578374
	U 20		578378
	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
Climatrix Variotherm System TH ClouSet	TH 11,6		578344
	TH 16		578352
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 16		578352
TH 18		578356	
TH 20		578358	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
Comap PEX Press	RFz 12		578490
	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	TH 14		578348
Comap Multiskin	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	THL 32		578368
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 14		578372
	U 16		578374
	U 18		578376
	U 20		578378
	U 32		578382
	H 14		578398
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
H 32		578412	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Comap Multiskin Gas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	THL 32		578368
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 20		578378
	U 32		578382
	H 16		578400
	H 20		578406
H 26		578410	
H 32		578412	
COMISA Press System	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	H 14		578398
	H 16		578400
H 18		578404	
H 20		578406	
H 26		578410	
H 32		578412	
B 14		578466	
B 16		578468	
B 18		578470	
B 20		578472	
B 26		578474	
B 32		578476	
COMISA Press System Gas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
CONEL CONNECT MULTI	F 16		578456
	F 20		578460
	F 26		578462
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
TH 26		578362	
TH 32		578364	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
U 16		578374	
U 20		578378	
(DN 26)		578380	
U 32		578382	
VP 16		578482	
VP 20		578484	
VP 32		578488	
CONEL CONNECT MV2	F 16		578456
	F 20		578460
	F 26		578462
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Conex Bänninger >B< Flex	F 16		578456
	F 18		578458
	F 20		578460
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 32 S (PR-2B)	Mini Z8	574734
	H 16		578400
	H 18		578404
	H 20		578406
	H 25		578408
	H 32		578412
	RFz 16		578492
	RFz 18		578638
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 32		578364
	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
U 32		578382	
Conex Bänninger >B< MaxiPro	BMP ¼"		578700
	BMP ⅜"		578702
	BMP ½"		578704
	BMP ⅝"		578706
	BMP ¾"		578708
	BMP 1"		578710
	BMP 1 ¼"		578712
	BMP 1 ½"		578714
Conex Bänninger >B< Press	V 12		578324
	V 14		578326
	V 15		578328
	V 16		578330
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 14 S (PR-2B)	Mini Z8	574800
	V 15 S (PR-2B)	Mini Z8	574752
	V 16 S (PR-2B)	Mini Z8	574802
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	
Conex Bänninger >B< Press Carbon	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
Conex Bänninger >B< Press Gas	V 12		578324
	V 14		578326
	V 15		578328
	V 16		578330
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 14 S (PR-2B)	Mini Z8	574800
	V 15 S (PR-2B)	Mini Z8	574752
	V 16 S (PR-2B)	Mini Z8	574802
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	
Conex Bänninger >B< Press Inox	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
Conex Bänninger >B< Press Solar	V 12		578324
	V 14		578326
	V 15		578328
	V 16		578330
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 14 S (PR-2B)	Mini Z8	574800
	V 15 S (PR-2B)	Mini Z8	574752
	V 16 S (PR-2B)	Mini Z8	574802
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
D				
Debrunner Acifer d-a Presssystem C-Stahl	M 12		578310	
	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
DIWAsystems	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	TH 14		578348	
	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
DUOPIPE Systems DUOFIL MKSYSTEM	TH 32		578364	
	TH 40		578624	
	U 16		578374	
	U 18		578376	
DW Verbundrohr multitubo systems	U 20		578378	
	U 25		578380	
	U 32		578382	
	U 16		578374	
	U 18		578376	
E	U 20		578378	
	U 25		578380	
	H 26		578410	
	TH 26		578362	
	TH 26 S (PR-2B)	Mini Z8	574794	
	U 32		578382	
	EBRILLE Isomomflex	U 16		578374
		U 20		578378
		U 25		578380
		H 26		578410
		TH 26		578362
	EBRILLE Monflex	TH 26 S (PR-2B)	Mini Z8	574794
		U 32		578382
		U 16		578374
U 20			578378	
U 25			578380	
EFFEBI EFFEBI-PRESS Aisi316 System M Profile ¹⁾	H 26		578410	
	TH 26		578362	
	TH 26 S (PR-2B)	Mini Z8	574794	
	U 32		578382	
	M 15		578312	
	M 18		578314	
	M 22		578316	
EFFEBI EFFEBI-PRESS Carbon-S System M Profile ¹⁾	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	V 12		578324	
	V 15		578328	
	EFFEBI EFFEBI-PRESS Carbon-S System V Profile	V 18		578332
V 22			578334	
V 28			578336	
V 35			578604	
V 12 S (PR-2B)		Mini Z8	574748	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
EFFEBI EFFEBI-PRESS Carbon-S System V Profile	M 12		578310	
	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
EFFEBI EFFEBI-PRESS Carbon-S System V Profile	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	V 12		578324	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
EFFEBI EFFEBI-PRESS UNICO	V 12		578324	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	EFFEBI EFFEBI-PRESS UNICO ⁴⁾ (GAS)	V 12		578324
		V 15		578328
V 18			578332	
V 22			578334	
V 28			578336	
V 35			578604	
V 12 S (PR-2B)		Mini Z8	574748	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
EFFEBI PRESSTIGE		M 15		578312
		M 18		578314
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
EFFEBI PRESSTIGE 4E05	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
EFFEBI PRESSTIGE-GAS ⁴⁾	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
V 35		578604		
V 15 S (PR-2B)	Mini Z8	574752		
V 18 S (PR-2B)	Mini Z8	574756		
V 22 S (PR-2B)	Mini Z8	574758		
V 28 S (PR-2B)	Mini Z8	574760		
V 35 S (PR-2B)	Mini Z8	574762		
EFFEBI TOF-GAS MULTIPINZA	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	H 16		578400	
	H 20		578406	
	H 26		578410	
	H 32		578412	
	U 16		578374	
	U 20		578378	
	U 32		578382	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
EFFEBI TOF MULTIPINZA	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	F 16		578456
	F 18		578458
	F 20		578460
	F 26		578462
	F 32		578464
	Fz 40		578478
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
	H 32		578412
	U 16		578374
	U 18		578376
U 20		578378	
U 25		578380	
C 26		578392	
U 32		578382	
U 40		578386	
B 16		578468	
B 18		578470	
B 20		578472	
B 26		578474	
B 32		578476	
EFIELD MULTILAYER PRESS DINGAS	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
EFIELD MULTILAYER PRESS WATER	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS ½" (OD 15,9 mm)		578566
	VUS ¾" (OD 22,2 mm)		578568
	VUS 1" (OD 28,6 mm)		578570
	VUS 1¼" (OD 34,9 mm)		578606
	ELYDAN izeo	RFz 16	
RFz 20		578494	
RFz 25		578496	
RFz 32		578498	
U 16		578374	
U 20		578378	
U 25		578380	
U 32		578382	
EMMETI GERPEX- FIVPRESS	B 16		578468
	B 20		578472
	B 26		578474
	B 32		578476
	F 16		578456
	F 20		578460
	H 16		578400
	H 20		578406
	TH 16		578352
	TH 20		578358
	TH 26		578362
EMPUR	TH 32		578364
	TH 40		578624
	U 16		578374
	U 20		578378
	TH 14		578348
	TH 15		578350
	TH 16		578352
	TH 17		578354
	TH 20		578358
	TH 25		578360
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
Esta Rohr simplesta SH M	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Esta Rohr simplesta ST M	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
EUROTUBI	M 12		578310
EUROPA	M 15		578312
C-Steel Pressfitting System M-Profile ¹⁾	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
EUROTUBI	M 15		578312
EUROPA	M 18		578314
Inox Pressfitting System M-Profile ¹⁾	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
M 35 S (PR-2B)	Mini Z8	574746	
Evans Components Presslok	VAU 15 (½")		578630
	VAU 20 (¾")		578632
	VAU 25 (1")		578634
F			
FAR Rubinetterie PRESSFAR	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	H 14		578398
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
	H 32		578412
	U 14		578372
	U 16		578374
	U 18		578376
	U 20		578378
U 25		578380	
U 32		578382	
U 40		578386	
F.B.Q. BARONIO BQ PRESS SOLAR	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
F.B.Q. BARONIO BQ PRESS WATER	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
F.B.Q. BARONIO BQ PRESS C-STEEL	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
F.B.Q. BARONIO BQ PRESS GAS	V 12		578324	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
Fercofloor DUO Press FERCO PEX	RFz 16		578492	
	RFz 20		578494	
	RFz 25		578496	
	RFz 32		578498	
	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788		
TH 32 S (PR-2B)	Mini Z8	574798		
Fercofloor DUO Press MULTIFER	RFz 16		578492	
	RFz 20		578494	
	RFz 25		578496	
	RFz 32		578498	
	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788		
TH 32 S (PR-2B)	Mini Z8	574798		
FERRO systems BRASELLI GPF GAS	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 25 S (PR-2B)	Mini Z8	574792	
	TH 32 S (PR-2B)	Mini Z8	574798	
	FERRO systems BRASELLI GPF MULT Pressfitting MULTICAPA	U 16		578374
		U 18		578376
U 20			578378	
U 25			578380	
U 32			578382	
U 40			578386	
FERRO systems BRASELLI GPF PPSU Pressfitting PEX y MULTICAPA		U 16		578374
		U 18		578376
		U 20		578378
		U 25		578380
	U 32		578382	
	U 40		578386	
	FERRO systems BRASELLI GPF PRESS Pressfitting PEX FILINOX Instalpress Steel	RFz 16		578492
		RFz 20		578494
		RFz 25		578496
		RFz 32		578498
M 15			578312	
M 18			578314	
M 22			578316	
M 28			578318	
M 35			578390	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)	Mini Z8	574740		
M 22 S (PR-2B)	Mini Z8	574742		
M 28 S (PR-2B)	Mini Z8	574744		
M 35 S (PR-2B)	Mini Z8	574746		
FILINOX Instalpress Inox	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
Fittings Estándar ECO-PRESS	RFz 16		578492	
	RFz 20		578494	
	RFz 25		578496	
	RFz 32		578498	
	Fittings Estándar MULTICAPA	RFz 16		578492
		RFz 18		578638
		RFz 20		578494
		RFz 25		578496
		RFz 32		578498

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
Fittings Estándar PE-X	RFz 16		578492	
	RFz 20		578494	
	RFz 25		578496	
	RFz 32		578498	
FORNARA ForPress	B 16		578468	
	B 20		578472	
	B 26		578474	
	B 32		578476	
	F 16		578456	
	F 20		578460	
	F 26		578462	
	F 32		578464	
	F 16 S (PR-2B)	Mini Z8	574728	
	F 20 S (PR-2B)	Mini Z8	574730	
	F 26 S (PR-2B)	Mini Z8	574732	
	F 32 S (PR-2B)	Mini Z8	574734	
	H 16		578400	
	H 20		578406	
	H 26		578410	
	H 32		578412	
	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	U 16		578374	
	U 20		578378	
	C 26		578392	
	U 32		578382	
	FORZA	K16/P18		578592
	WATER CRIMP (AUS)	K/20		578594
		K/25		578596
		K32		578598
	K1/40		578600	
FORZA STAINLESS WATER CRIMP	K16/P18		578592	
	K/20		578594	
FORZA	U 16		578374	
STESSO PEX	U 20		578378	
WATER AND GAS CRIMP AUS)	U 25		578380	
	U 32		578382	
	U 40		578386	
FORZA	K16/P18		578592	
GAS CRIMP (AUS)	K/20		578594	
	K/25		578596	
	K32		578598	
	K1/40		578600	
FORZA	VAU 15 (OD 12,7 mm)		578630	
COPPER V PRESS (AUS)	VAU 20 (OD 19,1 mm)		578632	
	VAU 25 (OD 25,4 mm)		578634	
	VAU 32 (OD 31,8 mm)		578636	
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804	
	VAU 20 S (PR-2B) (OD 19,1 mm)	Mini Z8	574806	
	VAU 25 S (PR-2B) (OD 25,4 mm)	Mini Z8	574808	
FORZA	V 15		578328	
STAINLESS V PRESS (AUS)	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	FRABO	M 15		578312
	FRABOPRESS 316 GAS M	M 18		578314
M 22			578316	
M 28			578318	
M 35			578390	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)		Mini Z8	574740	
M 22 S (PR-2B)		Mini Z8	574742	
M 28 S (PR-2B)		Mini Z8	574744	
M 35 S (PR-2B)		Mini Z8	574746	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
FRABO	V 15		578328	
FRABOPRESS 316 GAS V	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
FRABO	M 15		578312	
FRABOPRESS 316 M	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
		M 35 S (PR-2B)	Mini Z8	574746
	FRABO	V 12		578324
FRABOPRESS 316 V	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
FRABO	V 12		578324	
FRABOPRESS CHROME	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
FRABO	M 15		578312	
FRABOPRESS C-STEEL M	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
FRABO	V 12		578324	
FRABOPRESS C-STEEL V	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
FRABO	M 12		578310	
FRABOPRESS GAS M	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
		M 35 S (PR-2B)	Mini Z8	574746

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO FRABOPRESS GAS V	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
FRABO FRABOPRESS KOMBI	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
FRABO FRABOPRESS M	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
FRABO FRABOPRESS SOLAR	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
FRABO FRABOPRESS V	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
Fränkische alpex-duo XS	F 16		578456
	F 20		578460
	F 26		578462
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	TH 16		578352
	TH 20		578358
Fränkische alpex F50 PROFI	F 16		578456
	F 20		578460
	F 26		578462
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	H 16		578400
	H 20		578406
(DN 26)	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
Fränkische alpex L	Fz 40		578478

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
G			
gabotherm H+S	TH 10		578342
	TH 12		578346
	TH 14		578348
	TH 15		578350
	TH 16		578352
	TH 17		578354
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
Gallagher USA YogaPipe ACR	H 12 (1/4")		578396
	U 14 (3/8")		578372
	U 16 (1/2")		578374
	U 18 (5/8")		578376
	U 20 (3/4")		578378
	U 25 (7/8")		578380
Geberit Mapress C-STAHl	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
Geberit Mapress Edelstahl	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
Geberit Mapress Edelstahl Gas	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
Geberit Mapress Kupfer	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
Geberit Mapress Kupfer Gas	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
Geberit Mepla	G 16		578444
	G 20		578446
	G 26		578448
	G 32		578450
	G 40		578452
	G 20		578444
Geberit Mepla Therm	G 20		578446
	G 26		578448
Geberit Volex	TH 16		578352
	TH 20		578358
	TH 26		578362

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
General Fittings 5T00	H 16		578400	General Fittings Trident Gas	H 16		578400
	H 20		578406		H 20		578406
	H 26		578410		H 26		578410
	H 32		578412		H 32		578412
	TH 16		578352		TH 16		578352
	TH 20		578358		TH 20		578358
	TH 26		578362		TH 26		578362
	TH 32		578364		TH 32		578364
	TH 40		578624		TH 16 S (PR-2B)	Mini Z8	574782
	TH 16 S (PR-2B)	Mini Z8	574782		TH 20 S (PR-2B)	Mini Z8	574788
	TH 20 S (PR-2B)	Mini Z8	574788		TH 26 S (PR-2B)	Mini Z8	574794
	TH 26 S (PR-2B)	Mini Z8	574794		TH 32 S (PR-2B)	Mini Z8	574798
	TH 32 S (PR-2B)	Mini Z8	574798		U 16		578374
	U 16		578374		U 20		578378
	U 20		578378		U 32		578382
	U 32		578382		U 40		578386
U 40		578386	Giacomini	H 16		578400	
General Fittings Ewoprex	H 16		578400	Raccordi RM	H 20		578406
	H 20		578406	Giacomini	H 26		578410
	H 26		578410	H 32		578412	
	H 32		578412	TH 16		578352	
	TH 16		578352	TH 20		578358	
	TH 20		578358	TH 26		578362	
	TH 26		578362	TH 32		578364	
	TH 32		578364	TH 40		578624	
	TH 40		578624	U 16		578374	
	TH 16 S (PR-2B)	Mini Z8	574782	U 20		578378	
	TH 20 S (PR-2B)	Mini Z8	574788	U 32		578382	
	TH 26 S (PR-2B)	Mini Z8	574794	U 40		578386	
	TH 32 S (PR-2B)	Mini Z8	574798	Giacomini	H 16		578400
	U 16		578374	RM MULTIGAS	H 20		578406
	U 20		578378	H 26		578410	
	U 32		578382	H 32		578412	
U 40		578386	TH 16		578352		
General Fittings Serie 5S00	B 16		578468	TH 20		578358	
	B 18		578470	TH 26		578362	
	B 20		578472	TH 32		578364	
	B 26		578474	U 16		578374	
	B 32		578476	U 20		578378	
	F 16		578456	U 32		578382	
	F 20		578460	U 40		578386	
	F 26		578462	Giacomini	V 15		578328
	F 32		578464	Valvole Giacomini	V 18		578332
	F 16 S (PR-2B)	Mini Z8	574728	serie R850V	V 22		578334
	F 20 S (PR-2B)	Mini Z8	574730	V 28		578336	
	F 24 S (PR-2B)	Mini Z8	574732	V 35		578604	
	F 32 S (PR-2B)	Mini Z8	574734	V 15 S (PR-2B)	Mini Z8	574752	
	H 16		578400	V 18 S (PR-2B)	Mini Z8	574756	
	H 18		578404	V 22 S (PR-2B)	Mini Z8	574758	
	H 20		578406	V 28 S (PR-2B)	Mini Z8	574760	
	H 25		578408	V 35 S (PR-2B)	Mini Z8	574762	
	H 26		578410	SA 15		578514	
	H 32		578412	SA 18		578518	
	TH 16		578352	SA 22		578520	
	TH 18		578356	SA 28		578522	
	TH 20		578358	M 15		578312	
	TH 25		578360	M 18		578314	
	TH 26		578362	M 22		578316	
	TH 32		578364	M 28		578318	
	TH 40		578624	M 35		578390	
	TH 16 S (PR-2B)	Mini Z8	574782	M 15 S (PR-2B)	Mini Z8	574738	
	TH 20 S (PR-2B)	Mini Z8	574788	M 18 S (PR-2B)	Mini Z8	574740	
TH 26 S (PR-2B)	Mini Z8	574794	M 22 S (PR-2B)	Mini Z8	574742		
TH 32 S (PR-2B)	Mini Z8	574798	M 28 S (PR-2B)	Mini Z8	574744		
U 16		578374	M 35 S (PR-2B)	Mini Z8	574746		
U 18		578376	Gotan Pipe	U 16		578374	
U 20		578378	Systems	U 20		578378	
U 25		578380	(Scandinavia)	U 25		578380	
U 32		578382	Alu-Pres	U 32		578382	
U 40		578386	U 40		578386		
General Fittings Trident	B 16		578468	Grinnell G-PRESS	VUS ½" (OD 15,9 mm)		578566
	F 16		578456	Copper Fittings	VUS ¾" (OD 22,2 mm)		578568
	F 16 S (PR-2B)	Mini Z8	574728		VUS 1" (OD 28,6 mm)		578570
	H 16		578400		VUS 1¼" (OD 34,9 mm)		578606
	H 20		578406	GS	TH 14		578348
	H 26		578410	Wärmesysteme	TH 16		578352
	H 32		578412	System TH	TH 20		578358
	TH 16		578352		TH 26		578362
	TH 20		578358		TH 32		578364
	TH 26		578362		TH 40		578624
	TH 32		578364		TH 16 S (PR-2B)	Mini Z8	574782
	TH 40		578624		TH 20 S (PR-2B)	Mini Z8	574788
	TH 16 S (PR-2B)	Mini Z8	574782		TH 26 S (PR-2B)	Mini Z8	574794
	TH 20 S (PR-2B)	Mini Z8	574788		TH 32 S (PR-2B)	Mini Z8	574798
	TH 26 S (PR-2B)	Mini Z8	574794				
	TH 32 S (PR-2B)	Mini Z8	574798				
U 16		578374					
U 20		578378					
U 32		578382					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
GS Wärmesysteme System V	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
H			
HakaGerodur HAKASAN	TH 10		578342
	TH 11,6		578344
	TH 12		578346
	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
HASTINIK Hastinik/Hitpress	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
heima24	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
U 20		578378	
U 25		578380	
U 32		578382	
HELIROMA Klimapress	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
HELIROMA Romapress	Rfz 16		578492
	Rfz 20		578494
	Rfz 25		578496
	Rfz 32		578498
Henco	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	HE 32		578370
Herotec tempusPRESS PLUS	H 16		578400
	H 20		578406
	H 25		578408
	H 32		578412
	Rfz 16		578492
	Rfz 20		578494
	Rfz 25		578496
	Rfz 32		578498
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
TH 40		578624	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 32 S (PR-2B)	Mini Z8	574798	
U 16		578374	
U 20		578378	
U 25		578380	
U 32		578382	
U 40		578386	
Herotec tempusPRESS PLUS PPSU	H 16		578400
	H 20		578406
	H 25		578408
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 32 S (PR-2B)	Mini Z8	574798
U 16		578374	
U 20		578378	
U 25		578380	
U 32		578382	
U 40		578386	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
HERZ PIPEFIX	TH 10		578342
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
HIDRONIX MULTIGAS	TH 16		578352
	TH 20		578358
	TH 26		578362
HIDRONIX MULTIPIPE	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	H 14		578398
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
	H 32		578412
	U 14		578372
	U 16		578374
	U 18		578376
	U 20		578378
	C 26		578392
U 32		578382	
HIDRONIX UNICO	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	H 14		578398
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
H 32		578412	
U 14		578372	
U 16		578374	
U 18		578376	
U 20		578378	
C 26		578392	
U 32		578382	
HITEC Sistema Multistrato	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
TH 32 S (PR-2B)	Mini Z8	574798	
HITHERM-ISOTUBI NUMEPRESS	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
HITHERM-ISOTUBI HTpress	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
HITHERM-ISOTUBI HTfire	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
HITHERM-ISOTUBI HTair	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
Hopewell press fit system	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
hp praski BAVARIA-press	TH 10		578342
	TH 12		578346
	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
ICMA Sempiter	H 16		578400
	H 20		578406
	H 25		578408
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 20		578378
	U 25		578380
	C 26		578392
	U 32		578382
U 40		578386	
ICMA Sempigas	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
Idrosanitaria Bonomi Homegas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
TH 26 S (PR-2B)	Mini Z8	574794	
Idrosanitaria Bonomi Idropress	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
IDROSISTEMI Ta-Press	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	F 16		578456
	F 20		578460
	F 26		578462
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	Fz 40		578478
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	U 16		578374
	U 20		578378
	C 26		578392
	U 32		578382
	U 40		578386
	B 16		578468
	B 20		578472
	B 26		578474
	B 32		578476

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
IDROTRADE Storm Multipinza	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	THL 32		578368
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
IDROTRADE StormPRES ¹⁾	U 16		578374
	U 20		578378
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
IDROTRADE StormSTEEL ¹⁾	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
ILTA INOX/CHIBRO Pressfitting Cuni	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
ILTA INOX/CHIBRO Pressfitting inox	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
Instantor Copper Press Imperial	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
Instantor Copper Press Metric	VI ½" (OD 14,7 mm)		578716
	VI ¾" (OD 21,0 mm)		578718
	VI 1" (OD 27,4 mm)		578720
Instantor Press System	M 15		578312
	M 22		578316
	M 28		578318
	M 15 S (PR-2B)	Mini Z8	574738
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
IPA IPANA Press	M 35 S (PR-2B)	Mini Z8	574746
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	TH 10		578342
TH 11,6		578344	
TH 12		578346	
TH 14		578348	
TH 15		578350	
TH 16		578352	
TH 17		578354	
TH 18		578356	
TH 20		578358	
TH 22		578588	
TH 25		578360	
TH 26		578362	
TH 28		578590	
TH 32		578364	
TH 40		578624	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IPA Thu	TH 16		578352
IPANA Press	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
IPALPEX (Industrie du Plastique et Accessoires)	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	THL 32		578368
	TH 40		578624
IPLEX	K16/P18		578592
PIPELINES AUSTRALIA Iplex Pro-fit			
IPLEX	K16/P18		578592
PIPELINES	K/20		578594
AUSTRALIA	K/25		578596
Iplex K1	K32		578598
(Gas)	K1/40		578600
IPLEX	K16/P18		578592
PIPELINES	K/20		578594
AUSTRALIA	K/25		578596
Iplex K2			
ISOTUBI	M 15		578312
NUMEPRESS	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	IVAR	B 20	
ALPEX-GAS	B 26		578474
	B 32		578476
IVAR	TH 16		578352
MULTI PRESS	TH 20		578358
	TH 26		578362
GAS ITALIA	H 16		578400
	H 20		578406
	H 26		578410
	U 16		578374
	U 20		578378
IVAR	TH 16		578352
Multi Press MP	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
F 16		578456	
F 18		578458	
F 20		578460	
F 26		578462	
F 32		578464	
Fz 40		578478	
F 16 S (PR-2B)	Mini Z8	574728	
F 20 S (PR-2B)	Mini Z8	574730	
F 26 S (PR-2B)	Mini Z8	574732	
F 32 S (PR-2B)	Mini Z8	574734	
H 16		578400	
H 18		578404	
H 20		578406	
H 25		578408	
H 26		578410	
H 32		578412	
U 16		578374	
U 18		578376	
U 20		578378	
U 25		578380	
C 26		578392	
U 32		578382	
U 40		578386	
B 16		578468	
B 18		578470	
B 20		578472	
B 26		578474	
B 32		578476	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
IVAR Multi Press Leak (MPL)	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	F 16		578456	
	F 20		578460	
	F 26		578462	
	F 32		578464	
	F 16 S (PR-2B)	Mini Z8	574728	
	F 20 S (PR-2B)	Mini Z8	574730	
	F 26 S (PR-2B)	Mini Z8	574732	
	F 32 S (PR-2B)	Mini Z8	574734	
	H 16		578400	
	H 20		578406	
	H 25		578408	
	H 26		578410	
	H 32		578412	
	U 16		578374	
	U 20		578378	
	U 25		578380	
	C 26		578392	
	U 32		578382	
	B 16		578468	
	B 20		578472	
	B 26		578474	
	B 32		578476	
	IVAR	TH 16		578352
	Plastic Multi Press PMP	TH 20		578358
		TH 25		578360
TH 26			578362	
TH 32			578364	
TH 16 S (PR-2B)		Mini Z8	574782	
TH 20 S (PR-2B)		Mini Z8	574788	
TH 26 S (PR-2B)		Mini Z8	574794	
TH 32 S (PR-2B)		Mini Z8	574798	
F 16			578456	
F 20			578460	
F 26			578462	
F 32			578464	
F 16 S (PR-2B)		Mini Z8	574728	
F 20 S (PR-2B)		Mini Z8	574730	
F 26 S (PR-2B)		Mini Z8	574732	
F 32 S (PR-2B)		Mini Z8	574734	
H 16			578400	
H 20			578406	
H 26			578410	
H 32			578412	
U 16			578374	
U 20			578378	
U 25			578380	
C 26			578392	
U 32			578382	
B 16			578468	
B 20			578472	
B 26			578474	
B 32			578476	
IVAR		TH 16		578352
Plastic Multi Press Leak (PMPL)		TH 20		578358
		TH 26		578362
		TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	F 16		578456	
	F 20		578460	
	F 26		578462	
	F 32		578464	
	F 16 S (PR-2B)	Mini Z8	574728	
	F 20 S (PR-2B)	Mini Z8	574730	
	F 26 S (PR-2B)	Mini Z8	574732	
	F 32 S (PR-2B)	Mini Z8	574734	
	H 16		578400	
	H 20		578406	
	H 26		578410	
	H 32		578412	
	U 16		578374	
	U 20		578378	
	C 26		578392	
	U 32		578382	
	B 16		578468	
	B 20		578472	
	B 26		578474	
	B 32		578476	
	IVT Edelstahl- Presssystem	M 15		578312
		M 18		578314
		M 22		578316
		M 28		578318
		M 35		578390
		M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
IVT PRIPRESS	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
J			
Jäger - Aquatec Aquapress H	H 14		578398
	H 16		578400
	H 17		578402
	H 18		578404
	H 20		578406
	H 26		578410
	H 32		578412
	U 40		578386
Jäger - Aquatec C-Stahl Press Typ M	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
Jäger - Aquatec Edelstahl Press Typ M	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
Jäger - Aquatec Kupfer Press Typ V	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578404
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
Jansen AG JANSEN COMISA	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
		TH 32 S (PR-2B)	Mini Z8
Jaraflex- Presssystem	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
		TH 32 S (PR-2B)	Mini Z8
JUNGWOO JWPress	VUS ½" (OD 15,9 mm)		578566
	VUS ¾" (OD 22,2 mm)		578568
	VUS 1" (OD 28,6 mm)		578570
	VUS 1¼" (OD 34,9 mm)		578606
K			
KAN KAN-therm Press	U 16		578374
	U 20		578378
	U 25		578380
	C 26		578392
	U 32		578382
	U 40		578386

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
KAN KAN-therm Press LBP	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 14		578372
	U 16		578374
	U 20		578378
	U 25		578380
	C 26		578392
U 32		578382	
U 40		578386	
KAN KAN-therm Inox	M 12		578310
	M 15		578312
	M 18 ¹⁾		578314
	M 22		578316
	M 28 ¹⁾		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
M 28 S (PR-2B)	Mini Z8	574744	
M 35 S (PR-2B)	Mini Z8	574746	
KAN KAN-therm Steel	M 12		578310
	M 15		578312
	M 18 ¹⁾		578314
	M 22		578316
	M 28 ¹⁾		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
M 28 S (PR-2B)	Mini Z8	574744	
M 35 S (PR-2B)	Mini Z8	574746	
KAN KAN-therm UltraPRESS	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 14		578372
	U 16		578374
	U 20		578378
	U 25		578380
	C 26		578392
U 32		578382	
U 40		578386	
KE KELIT COPPERFIX Kupfer	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
M 22 S (PR-2B)	Mini Z8	574742	
M 28 S (PR-2B)	Mini Z8	574744	
M 35 S (PR-2B)	Mini Z8	574746	
KE KELIT KELOX	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
KE KELIT KELOX-PPSU-W	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
KE KELIT KELOX-ULTRAX	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
KE KELIT KELOX-ULTRAX-W	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
U 40		578386	

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KE KELIT KELO-WINDOW-U	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
KE KELIT KELOX-WINDOW-W	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
KE KELIT steelFIX C-Stahl	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	KE KELIT steelFIX Edelstahl	M 15	
M 18			578314
M 22			578316
M 28			578318
M 35			578390
M 15 S (PR-2B)		Mini Z8	574738
M 18 S (PR-2B)		Mini Z8	574740
M 22 S (PR-2B)		Mini Z8	574742
M 28 S (PR-2B)		Mini Z8	574744
M 35 S (PR-2B)		Mini Z8	574746
KEMBLA KemPress (AUS)		VAU 15 (OD 12,7 mm)	
	VAU 20 (OD 19,1 mm)		578632
	VAU 25 (OD 25,4 mm)		578634
	VAU 32 (OD 31,8 mm)		578636
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		578630
	VAU 20 (OD 19,1 mm)		578632
	VAU 25 (OD 25,4 mm)		578634
	VAU 32 (OD 31,8 mm)		578636
KISAN Kisan KD	KI 16		578524
	KI 20		578526
	KI 25		578528
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
KISAN Kisan WL	KI 16		578524
	KI 20		578526
	KI 25		578528
	KI 32		578530
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
KISAN Kisan WM	KI 16		578524
	KI 20		578526
	KI 25		578528
	KI 32		578530
KISAN Kisan WR	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
	TH 20		578358
	TH 25		578360
	TH 32		578364
	TH 40		578624
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 32 S (PR-2B)	Mini Z8	574798
KISAN Kistal C	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
KISAN Kistal Inox	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		578566
	VUS ¾" (OD 22,2 mm)		578568
	VUS 1" (OD 28,6 mm)		578570
	VUS 1¼" (OD 34,9 mm)		578606

L

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
LK Systems LK >B-Press	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
V 35 S (PR-2B)	Mini Z8	574762	
LK Systems LK >B-Press Eltörzinkat	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
V 35 S (PR-2B)	Mini Z8	574762	
LK Systems LK >B-Press Gas	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
	LK Systems LK Universal	TH 16	
TH 20			578358
TH 25			578360
TH 32			578364
TH 40			578624
LVI-DAHL Altech-Aluflux	U 16		578374
	U 20		578378
	U 25		578380
MAINCOR MAINPRESS	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
MAINCOR MAINFLOR	U 16		578374
	U 20		578378
Mair Heiztechnik M-Press	H 11,5		578394
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
Ma.s.ter System PRESSMASTER	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
Meier Tobler Metalplast - Stramax Serie MM	H 14		578398
	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
	H 32		578412
	U 14		578372
	U 16		578374
	U 18		578376
	U 20		578378
METALGRUP Permatubo	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
	H 16		578400
	H 20		578406
	H 25		578408
	H 32		578412
Meier Tobler Metalplast - Stramax Serie MM	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
TH 20 S (PR-2B)	Mini Z8	574788	
TH 32 S (PR-2B)	Mini Z8	574798	
METALGRUP Permatubo	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
METALGRUP PexGrup	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
METALGRUP MultiGrup	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
Mueller Industries Streamline PRS	VUS ½" (OD 15,9 mm)		578566
	VUS ¾" (OD 22,2 mm)		578568
	VUS 1" (OD 28,6 mm)		578570
	VUS 1¼" (OD 34,9 mm)		578606
MULTITHERM PRESSSYSTEM	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
Multicap Industrial AIS PEX	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
	U 16		578374
	U 20		578378
	U 25		578380
Multicap Industrial AIS XPRT	U 32		578382
	H 16		578400
	H 20		578406
	H 25		578408
	H 26		578410
	H 32		578412
	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 20		578378
	U 25		578380
U 32		578382	
U 40		578386	
Multicap Industrial multitubo systems MC	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
Multicap Industrial multitubo systems MM	H 16		578400
	H 20		578406
	H 25		578408
	H 26		578410
	H 32		578412
	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
U 40		578386	

N

NEUTHERM MEKUPRESS-HT	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
NIBCO (USA) Press System Copper	VUS ½" (OD 15,9 mm)		578566	
	VUS ¾" (OD 22,2 mm)		578568	
	VUS 1" (OD 28,6 mm)		578570	
	VUS 1¼" (OD 34,9 mm)		578606	
NICOLL FLUXO	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
NUPI Industrie Italiane Multinupi	B 16		578468	
	B 18		578470	
	B 20		578472	
	B 26		578474	
	B 32		578476	
	F 16		578456	
	F 18		578458	
	F 20		578460	
	F 26		578462	
	F 32		578464	
	F 16 S (PR-2B)	Mini Z8	574728	
	F 20 S (PR-2B)	Mini Z8	574730	
	F 26 S (PR-2B)	Mini Z8	574732	
	F 32 S (PR-2B)	Mini Z8	574734	
	H 16		578400	
	H 18		578404	
	H 20		578406	
	H 25		578408	
	H 26		578410	
	H 32		578412	
TH 16		578352		
TH 18		578356		
TH 20		578358		
TH 25		578360		
TH 26		578362		
TH 32		578364		
TH 16 S (PR-2B)	Mini Z8	574782		
TH 20 S (PR-2B)	Mini Z8	574788		
TH 26 S (PR-2B)	Mini Z8	574794		
TH 32 S (PR-2B)	Mini Z8	574798		
U 14		578372		
U 16		578374		
U 18		578376		
U 20		578378		
U 25		578380		
C 26		578392		
U 32		578382		
U 40		578386		
Nussbaum Optifitt-Press	VMP ¾" (OD 17,2 mm)		578660	
	VMP ½" (OD 21,3 mm)		578662	
Nussbaum Optiflex-Flowpress	VRX 16		578640	
	VRX 20		578642	
	VRX 25		578644	
	VRX 32		578646	
Nussbaum Optipress	V 15		578328	
	V 18		578332	
Aquaplus	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	Nussbaum Optipress Gaz	V 15		578328
		V 18		578332
V 22			578334	
V 28			578336	
V 35			578604	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
Nussbaum Optipress-Therm	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
V 22 S (PR-2B)	Mini Z8	574758		
V 28 S (PR-2B)	Mini Z8	574760		
V 35 S (PR-2B)	Mini Z8	574762		

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
O			
Oventrop Cofit P	H 16 A H 20 A H 26 A H 32 A		578420 578426 578430 578432
Oventrop Cofit PD	H 16 A H 20 A H 26 A		578420 578426 578430
Oventrop Cofit PDK	H 16 A H 20 A		578420 578426
Oventrop Cofit PD-HT	H 16 A H 20 A H 32 A		578420 578426 578432
Oventrop Cofit PDK-HT	H 16 A H 20 A		578420 578426
P			
PBTub SERTIPRESS	Rfz 12 Rfz 16 Rfz 20 Rfz 25		578490 578492 578494 578496
PBTub SERTI-STEEL ¹⁾	M 15 M 18 M 22 M 28 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B)		578312 578314 578316 578318 574738 574740 574742 574744
Pegler Yorkshire XPress Carbon	M 12 M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 12 S (PR-2B) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		578310 578312 578314 578316 578318 578390 574736 574738 574740 574742 574744 574746
Pegler Yorkshire XPress Copper	M 12 M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 12 S (PR-2B) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		578310 578312 578314 578316 578318 578390 574736 574738 574740 574742 574744 574746
Pegler Yorkshire XPress Copper Gas	M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35		578312 578314 578316 578318 578390
Pegler Yorkshire XPress Stainless	M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		578312 578314 578316 578318 578390 574738 574740 574742 574744 574746
Pegler Yorkshire XPress Stainless Gas	M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35		578312 578314 578316 578318 578390
PERFEXIM PERFEKT SYSTEM	U 16 U 20 U 25 U 32		578374 578378 578380 578382
PERFILTUBO PERFILALUPEX	U 16 U 18 U 20 U 25 U 32 U 40		578374 578376 578378 578380 578382 578386
PERFILTUBO PERFILPRESS	M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		578312 578314 578316 578318 578390 574738 574740 574742 574744 574746
PEXTUBE PexTube	Rfz 16 Rfz 20 Rfz 25 Rfz 32		578492 578494 578496 578498

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Pipelife C-PRESS	M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		578312 578314 578316 578318 578390 574738 574740 574742 574744 574746
Pipelife RADOPRESS	TH 16 TH 18 TH 20 TH 26 TH 32 TH 40 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B)		578352 578356 578358 578362 578364 578624 574782 574788 574794 574798
Pipetec Connect	TH 16 TH 20 TH 26 TH 32 TH 40 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B) U 16 U 20 U 25 U 32		578352 578358 578362 578364 578624 574782 574788 574794 574798 578374 578378 578380 578382
PLASTICA ALFA Multypex	TH 16 TH 20 TH 26 TH 32 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B)		578352 578358 578362 578364 574782 574788 574794 574798
PLASTICA ALFA Multypex Air	TH 16 TH 20 TH 26 TH 32 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B)		578352 578358 578362 578364 574782 574788 574794 574798
PLASTICA ALFA Multypex alfa Gas	TH 16 TH 20 TH 26 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B)		578352 578358 578362 574782 574788 574794
PLASTICA ALFA Multypex alfa Gas protek	TH 16 TH 20 TH 26 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B)		578352 578358 578362 574782 574788 574794
PLASTICA ALFA Multypex Plus	TH 16 TH 20 TH 26 TH 32 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B)		578352 578358 578362 578364 574782 574788 574794 574798
PLASTICA ALFA Multypex Thermo	TH 16 TH 20 TH 26 TH 32 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B)		578352 578358 578362 578364 574782 574788 574794 574798
PLASTICA ALFA Multypex Thermo Plus	TH 16 TH 20 TH 26 TH 32 TH 16 S (PR-2B) TH 20 S (PR-2B) TH 26 S (PR-2B) TH 32 S (PR-2B)		578352 578358 578362 578364 574782 574788 574794 574798
PLÁSTICOS FERRO FERROPLAST GPF MULT Pressfitting MULTICAPA	U 16 U 20 U 25 U 32		578374 578378 578380 578382
PLÁSTICOS FERRO FERROPLAST GPF PPSU Pressfitting PEX y MULTICAPA	U 16 U 20 U 25 U 32		578374 578378 578380 578382
PLÁSTICOS FERRO FERROPLAST GPF PRESS Pressfitting PEX	Rfz 16 Rfz 20 Rfz 25 Rfz 32		578492 578494 578496 578498

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
PLUMBING PLUS EZIPEX Crimp (AUS)	K16/P18		578592
	K/20		578594
	K/25		578596
	K32		578598
	K1/40		578600
PLUMBING PLUS EZIPEX Gas (AUS)	K16/P18		578592
	K/20		578594
	K/25		578596
	K32		578598
	K1/40		578600
PLUMBING PLUS UNIPEX Water & Gas (AUS)	Yz 16 UNI		578740
	Yz 20 UNI		578742
	Yz 25 UNI		578744
	Yz 32 UNI		578746
PLUMBING PLUS EZIPRESS Gas (AUS)	VAU 15 (OD 12,7 mm)		578630
	VAU 20 (OD 19,1 mm)		578632
	VAU 25 (OD 25,4 mm)		578634
	VAU 32 (OD 31,8 mm)		578636
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804
	VAU 20 S (PR-2B) (OD 19,1 mm)	Mini Z8	574806
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 25 S (PR-2B) (OD 25,4 mm)	Mini Z8	574808
	VAU 15 (OD 12,7 mm)		578630
	VAU 20 (OD 19,1 mm)		578632
	VAU 25 (OD 25,4 mm)		578634
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 32 (OD 31,8 mm)		578636
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804
	VAU 20 S (PR-2B) (OD 19,1 mm)	Mini Z8	574806
	VAU 25 S (PR-2B) (OD 25,4 mm)	Mini Z8	574808
	TH 10		578342
	TH 15		578350
POLYPIPE POLYSURE	TH 22		578588
	TH 28		578590
	M 15		578312
	M 18		578314
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
POLYSAN- C Stahl-Press- System M	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
POLYSAN- Edelstahl Press-System 1.4520	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 35 S (PR-2B)	Mini Z8	574746
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
POLYSAN- Edelstahl Press-System Gas	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 35 S (PR-2B)	Mini Z8	574746
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
POLYSAN- Edelstahl Press-System Wasser	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 18		578356
	TH 20		578358
	TH 26		578362
POLYSAN- Press-System	TH 32		578364
	TH 40		578424
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14		578348	
	TH 16		578352	
	TH 17		578354	
	TH 18		578356	
	TH 20		578358	
	POLYSAN-Henco- Press-System	TH 26		578362
		HE 32		578370
		HEz 40 ³⁾		578572
		TH 16 S (PR-2B)	Mini Z8	574782
		TH 20 S (PR-2B)	Mini Z8	574788
		TH 26 S (PR-2B)	Mini Z8	574794
		U 16		578374
	POLYSAN (España) „Rainbow“	U 18		578376
U 20			578378	
U 25			578380	
U 32			578382	
	U 40		578386	
	H 14		578398	
	Prandelli Multyrama Pf	H 16		578400
		H 18		578404
H 20			578406	
H 26			578412	
	H 32		578412	
	U 40		578386	
	Prandelli Multyrama Pfm	H 16		578400
		H 18		578404
H 20			578406	
H 26			578410	
PURMO Cleverfit Radial	H 32		578412	
	TH 16		578352	
	TH 18		578356	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	U 16		578374	
	U 20		578378	
U 40		578386		
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	F 16		578456	
	F 20		578460	
	F 26		578462	
	F 32		578464	
	F 16 S (PR-2B)	Mini Z8	574728	
	F 20 S (PR-2B)	Mini Z8	574730	
	F 26 S (PR-2B)	Mini Z8	574732	
	F 32 S (PR-2B)	Mini Z8	574734	
	H 16		578400	
	H 20		578406	
	H 26		578410	
	H 32		578412	
	TH 14		578348	
TH 16		578352		
TH 17		578354		
TH 18		578356		
TH 20		578358		
TH 26		578362		
TH 32		578364		
TH 40		578624		
TH 16 S (PR-2B)	Mini Z8	574782		
TH 20 S (PR-2B)	Mini Z8	574788		
TH 26 S (PR-2B)	Mini Z8	574794		
TH 32 S (PR-2B)	Mini Z8	574798		
U 16		578374		
U 20		578378		
U 32		578382		
VP 16		578482		
VP 20		578484		
VP 32		578488		
R				
Raccorderie Metalliche aesPRES ⁴⁾	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
M 28 S (PR-2B)	Mini Z8	574744		
M 35 S (PR-2B)	Mini Z8	574746		

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Raccorderie Metalliche inoxPRES ⁹	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
Raccorderie Metalliche MARINEPRES ⁹	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
Raccorderie Metalliche steelPRES ⁹	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	RBM Tita-fix	B 14		578466
B 16			578468	
B 18			578470	
B 20			578472	
B 26			578474	
F 16			578456	
F 18			578458	
F 20			578460	
F 16 S (PR-2B)		Mini Z8	574728	
F 20 S (PR-2B)		Mini Z8	574730	
H 14			578398	
H 16			578400	
H 18			578404	
H 20			578406	
H 26			578410	
H 32			578412	
TH 14			578348	
TH 16			578352	
TH 18			578356	
TH 20			578358	
TH 26			578362	
TH 32			578364	
TH 40			578624	
TH 16 S (PR-2B)		Mini Z8	574782	
TH 20 S (PR-2B)		Mini Z8	574788	
TH 26 S (PR-2B)		Mini Z8	574794	
TH 32 S (PR-2B)		Mini Z8	574798	
U 14			578372	
U 16			578374	
U 18			578376	
U 20			578378	
RBM Tita-gas		TH 16		578352
		TH 20		578358
	TH 26		578362	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798		
Redi Nicoll Fluxo	TH 14		578348	
	TH 16		578352	
	TH 18		578356	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
Redi Nicoll Fluxo Gas	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
RIFENG LD PRESS FITTING (F8)	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	LD 16		578652	
	LD 20		578654	
	LD 25		578656	
	RIFENG U PRESS FITTING (F5)	U 14		578372
U 16			578374	
U 18			578376	
U 20			578378	
U 25			578380	
U 32			578382	
U 40			578386	
RIFENG TH PRESS FITTING (F9)	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
	RIQUIER A SERTIR	Rfz 12		578490
Rfz 16			578492	
Rfz 20			578494	
Rfz 25			578496	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Roth PressCheck	RN 14		578434	
	RN 16		578454	
	RN 17		578436	
	RN 20		578438	
	RN 25/26		578440	
Rubinetteria Bresciane Bonomi TURBO CuNi	RN 32		578442	
	M 15		578312	
	M 18		578314	
	M 22		578316	
	M 28		578318	
TURBO INOX	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	Rubinetteria Bresciane Bonomi TURBO INOX GAS	M 15		578312
M 18			578314	
M 22			578316	
M 28			578318	
M 35			578390	
TURBO STEEL	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	Rubinetteria Bresciane Bonomi TURBO PRESS	M 15		578312
		M 18		578314
M 22			578316	
M 28			578318	
M 35			578390	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)		Mini Z8	574740	
Rubinetteria Bresciane Bonomi TURBO PRESS	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	B 14		578466	
	B 16		578468	
	B 18		578470	
	B 20		578472	
	B 26		578474	
	B 32		578476	
	H 14		578398	
	H 16		578400	
	H 18		578404	
	H 20		578406	
	H 26		578410	
	H 32		578412	
Rubinetteria Bresciane Bonomi TURBO PRESS GAS	TH 14		578348	
	TH 16		578352	
	TH 18		578356	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	U 14		578372	
	U 16		578374	
	U 18		578376	
	U 20		578378	
Rubinetteria Bresciane Bonomi TURBO PRESS GAS	C 26		578392	
	U 32		578382	
	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788		
SA.MI plastic Multistrato Gas	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	TH 14		578348	
	TH 16		578352	
	TH 18		578356	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	
	TH 16		578352	
	TH 20		578358	
TH 26		578362		
TH 32		578364		
SA.MI plastic	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 26 S (PR-2B)	Mini Z8	574794	
	TH 32 S (PR-2B)	Mini Z8	574798	

S

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.		
SANHA 3fit-Press Pb-free Serie 25000	B 16		578468	SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		578514		
	B 20		578472		SA 18		578518		
	B 26		578474		SA 22		578520		
	B 32		578476		SA 28		578522		
	F 16		578456		M 15 ¹⁾		578312		
	F 20		578460		M 18 ¹⁾		578314		
	F 26		578462		M 22 ¹⁾		578316		
	F 32		578464		M 28		578318		
	Fz 40		578478		M 35		578390		
	F 16 S (PR-2B)	Mini Z8	574728		M 15 S (PR-2B)	Mini Z8	574738		
	F 20 S (PR-2B)	Mini Z8	574730		M 18 S (PR-2B)	Mini Z8	574740		
	F 26 S (PR-2B)	Mini Z8	574732		M 22 S (PR-2B)	Mini Z8	574742		
	F 32 S (PR-2B)	Mini Z8	574734		M 28 S (PR-2B)	Mini Z8	574744		
	H 16		578400		M 35 S (PR-2B)	Mini Z8	574746		
	H 20		578406		V 15 ¹⁾		578328		
	H 26		578410		V 18 ¹⁾		578332		
	H 32		578412		V 22 ¹⁾		578334		
	TH 16		578352		V 28		578336		
	TH 20		578358		V 35		578604		
	TH 26		578362		V 15 S (PR-2B)	Mini Z8	574752		
	TH 32		578364		V 18 S (PR-2B)	Mini Z8	574756		
	TH 40		578624		V 22 S (PR-2B)	Mini Z8	574758		
	TH 16 S (PR-2B)	Mini Z8	574782		V 28 S (PR-2B)	Mini Z8	574760		
	TH 20 S (PR-2B)	Mini Z8	574788		V 35 S (PR-2B)	Mini Z8	574762		
	TH 26 S (PR-2B)	Mini Z8	574794						
	TH 32 S (PR-2B)	Mini Z8	574798						
	U 16		578374						
	U 20		578378						
	C 26		578392						
	U 32		578382						
	U 40		578386						
	SANHA 3fit-Press PPSU Serie 35000	B 16			578468	SANHA-NiroSan- Presssystem Serie 9000	SA 15		578514
		B 20			578472		SA 18		578518
B 26			578474	SA 22			578520		
B 32			578476	SA 28			578522		
F 16			578456	M 15 ¹⁾			578312		
F 20			578460	M 18 ¹⁾			578314		
F 26			578462	M 22 ¹⁾			578316		
F 32			578464	M 28			578318		
F 16 S (PR-2B)		Mini Z8	574728	M 35			578390		
F 20 S (PR-2B)		Mini Z8	574730	M 15 S (PR-2B)	Mini Z8		574738		
F 26 S (PR-2B)		Mini Z8	574732	M 18 S (PR-2B)	Mini Z8		574740		
F 32 S (PR-2B)		Mini Z8	574734	M 22 S (PR-2B)	Mini Z8		574742		
H 16			578400	M 28 S (PR-2B)	Mini Z8		574744		
H 20			578406	M 35 S (PR-2B)	Mini Z8		574746		
H 26			578410	V 15 ¹⁾			578328		
H 32			578412	V 18 ¹⁾			578332		
TH 16			578352	V 22 ¹⁾			578334		
TH 20			578358	V 28			578336		
TH 26			578362	V 35			578604		
TH 32			578364	V 15 S (PR-2B)	Mini Z8		574752		
TH 16 S (PR-2B)		Mini Z8	574782	V 18 S (PR-2B)	Mini Z8		574756		
TH 20 S (PR-2B)		Mini Z8	574788	V 22 S (PR-2B)	Mini Z8		574758		
TH 26 S (PR-2B)		Mini Z8	574794	V 28 S (PR-2B)	Mini Z8		574760		
TH 32 S (PR-2B)		Mini Z8	574798	V 35 S (PR-2B)	Mini Z8		574762		
U 16			578374						
U 20			578378						
C 26			578392						
U 32			578382						
SANHA Heavy Steel Press		VMP ½" (OD 21,3 mm)		578662	SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)		SA 15		578514
		VMPz ¾" (OD 26,9 mm)		578664			SA 18		578518
SANHA Heavy Steel Press Gas		VMP ½" (OD 21,3 mm)		578662	SA 22			578520	
		VMPz ¾" (OD 26,9 mm)		578664	SA 28			578522	
SANHA-NiroSan Gas Presssystem Serie 17000		SA 15		578514	M 15 ¹⁾			578312	
	SA 18		578518	M 18 ¹⁾		578314			
	SA 22		578520	M 22 ¹⁾		578316			
	SA 28		578522	M 28		578318			
	M 15 ¹⁾		578312	M 35		578390			
	M 18 ¹⁾		578314	M 15 S (PR-2B)	Mini Z8	574738			
	M 22 ¹⁾		578316	M 18 S (PR-2B)	Mini Z8	574740			
	M 28		578318	M 22 S (PR-2B)	Mini Z8	574742			
	M 35		578390	M 28 S (PR-2B)	Mini Z8	574744			
	M 15 S (PR-2B)	Mini Z8	574738	M 35 S (PR-2B)	Mini Z8	574746			
	M 18 S (PR-2B)	Mini Z8	574740	V 15 ¹⁾		578328			
	M 22 S (PR-2B)	Mini Z8	574742	V 18 ¹⁾		578332			
	M 28 S (PR-2B)	Mini Z8	574744	V 22 ¹⁾		578334			
	M 35 S (PR-2B)	Mini Z8	574746	V 28		578336			
	V 15 ¹⁾		578328	V 35		578604			
	V 18 ¹⁾		578332	V 15 S (PR-2B)	Mini Z8	574752			
	V 22 ¹⁾		578334	V 18 S (PR-2B)	Mini Z8	574756			
	V 28		578336	V 22 S (PR-2B)	Mini Z8	574758			
	V 35		578604	V 28 S (PR-2B)	Mini Z8	574760			
	V 15 S (PR-2B)	Mini Z8	574752	V 35 S (PR-2B)	Mini Z8	574762			
	V 18 S (PR-2B)	Mini Z8	574756						
	V 22 S (PR-2B)	Mini Z8	574758						
	V 28 S (PR-2B)	Mini Z8	574760						
V 35 S (PR-2B)	Mini Z8	574762							

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA NiroTherm Serie 91000	SA 15		578514	
	SA 18		578518	
	SA 22		578520	
	SA 28		578522	
	M 15 ¹⁾		578312	
	M 18 ¹⁾		578314	
	M 22 ¹⁾		578316	
	M 28		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	V 15 ¹⁾		578328	
	V 18 ¹⁾		578332	
	V 22 ¹⁾		578334	
	V 28		578336	
	V 35		578604	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	SANHA NiroTherm Industry Serie 98000	SA 15		578514
		SA 18		578518
		SA 22		578520
SA 28			578522	
M 15 ¹⁾			578312	
M 18 ¹⁾			578314	
M 22 ¹⁾			578316	
M 28			578318	
M 35			578390	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)		Mini Z8	574740	
M 22 S (PR-2B)		Mini Z8	574742	
M 28 S (PR-2B)		Mini Z8	574744	
M 35 S (PR-2B)		Mini Z8	574746	
V 15 ¹⁾			578328	
V 18 ¹⁾			578332	
V 22 ¹⁾			578334	
V 28			578336	
V 35			578604	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
SANHA-Press Chrom Serie 16000		SA 12		578510
		SA 15		578514
		SA 18		578518
	SA 22		578520	
	SA 28		578522	
	M 12		578310	
	M 15 ¹⁾		578312	
	M 18 ¹⁾		578314	
	M 22 ¹⁾		578316	
	M 28		578318	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	V 12		578324	
	V 15 ¹⁾		578328	
	V 18 ¹⁾		578332	
	V 22 ¹⁾		578334	
	V 28		578336	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		578510
		SA 14		578512
SA 15			578514	
SA 16			578516	
SA 18			578518	
SA 22			578520	
SA 28			578522	
M 12			578310	
M 15 ¹⁾			578312	
M 18 ¹⁾			578314	
M 22 ¹⁾			578316	
M 28			578318	
M 35			578390	
M 12 S (PR-2B)		Mini Z8	574736	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)		Mini Z8	574740	
M 22 S (PR-2B)		Mini Z8	574742	
M 28 S (PR-2B)		Mini Z8	574744	
M 35 S (PR-2B)		Mini Z8	574746	
V 12			578324	
V 14			578326	
VG 14			578338	
V 15 ¹⁾			578328	
V 16			578330	
VG 16			578340	
V 18 ¹⁾			578332	
V 22 ¹⁾			578334	
V 28			578336	
V 35			578604	
V 12 S (PR-2B)		Mini Z8	574748	
VG 14 S (PR-2B)		Mini Z8	574750	
V 15 S (PR-2B)		Mini Z8	574752	
VG 16 S (PR-2B)		Mini Z8	574754	
V 18 S (PR-2B)	Mini Z8	574756		
V 22 S (PR-2B)	Mini Z8	574758		
V 28 S (PR-2B)	Mini Z8	574760		
V 35 S (PR-2B)	Mini Z8	574762		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press Pressfittings Serie 6000	SA 12		578510
	SA 14		578512
	SA 15		578514
	SA 16		578516
	SA 18		578518
	SA 22		578520
	SA 28		578522
	M 12		578310
	M 15 ¹⁾		578312
	M 18 ¹⁾		578314
	M 22 ¹⁾		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	V 12		578324
	V 14		578326
	VG 14		578338
	V 15 ¹⁾		578328
	V 16		578330
	VG 16		578340
	V 18 ¹⁾		578332
	V 22 ¹⁾		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	VG 14 S (PR-2B)	Mini Z8	574750
	V 15 S (PR-2B)	Mini Z8	574752
	VG 16 S (PR-2B)	Mini Z8	574754
V 18 S (PR-2B)	Mini Z8	574756	
V 22 S (PR-2B)	Mini Z8	574758	
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		578510
	SA 15		578514
	SA 18		578518
	SA 22		578520
	SA 28		578522
	M 12		578310
	M 15 ¹⁾		578312
	M 18 ¹⁾		578314
	M 22 ¹⁾		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
SANHA PURAPRESS Serie 8000	SA 12		578510
	SA 14		578512
	SA 15		578514
	SA 16		578516
	SA 18		578518
	SA 22		578520
	SA 28		578522
	M 12 ¹⁾		578310
	M 15 ¹⁾		578312
	M 18 ¹⁾		578314
	M 22 ¹⁾		578316
	M 28 ¹⁾		578318
	M 35 ¹⁾		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
M 18 S (PR-2B)	Mini Z8	574740	
M 22 S (PR-2B)	Mini Z8	574742	
M 28 S (PR-2B)	Mini Z8	574744	
M 35 S (PR-2B)	Mini Z8	574746	
V 12		578324	
V 14		578326	
VG 14		578338	
V 15 ¹⁾		578328	
V 16		578330	
VG 16		578340	
V 18 ¹⁾		578332	
V 22 ¹⁾		578334	
V 28		578336	
V 35		578604	
V 12 S (PR-2B)	Mini Z8	574748	
VG 14 S (PR-2B)	Mini Z8	574750	
V 15 S (PR-2B)	Mini Z8	574752	
VG 16 S (PR-2B)	Mini Z8	574754	
V 18 S (PR-2B)	Mini Z8	574756	
V 22 S (PR-2B)	Mini Z8	574758	
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA-Therm Serie 24000	SA 12		578510	
	SA 15		578514	
	SA 18		578518	
	SA 22		578520	
	SA 28		578522	
	M 12		578310	
	M 15 ¹⁾		578312	
	M 18 ¹⁾		578314	
	M 22 ¹⁾		578316	
	M 28		578318	
	M 35		578390	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	V 12		578324	
	V 15 ¹⁾		578328	
	V 18 ¹⁾		578332	
	V 22 ¹⁾		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	SANHA-Therm Industry Serie 28000	SA 12		578510
		SA 15		578514
		SA 18		578518
		SA 22		578520
SA 28			578522	
M 12			578310	
M 15 ¹⁾			578312	
M 18 ¹⁾			578314	
M 22 ¹⁾			578316	
M 28			578318	
M 35			578390	
M 12 S (PR-2B)		Mini Z8	574736	
M 15 S (PR-2B)		Mini Z8	574738	
M 18 S (PR-2B)		Mini Z8	574740	
M 22 S (PR-2B)		Mini Z8	574742	
M 28 S (PR-2B)		Mini Z8	574744	
M 35 S (PR-2B)		Mini Z8	574746	
V 12			578324	
V 15 ¹⁾			578328	
V 18 ¹⁾			578332	
V 22 ¹⁾			578334	
V 28			578336	
V 35			578604	
V 12 S (PR-2B)		Mini Z8	574748	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
SANITOP PERMATUBO INOX		M 15		578312
		M 18		578314
		M 22		578316
		M 28		578318
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
	SANPRO THPRESS	TH 16		578352
		TH 20		578358
TH 26			578362	
TH 32			578364	
TH 16 S (PR-2B)		Mini Z8	574782	
TH 20 S (PR-2B)		Mini Z8	574788	
TH 26 S (PR-2B)		Mini Z8	574794	
TH 32 S (PR-2B)		Mini Z8	574798	
SATEC SK VITerm	TH 16		578352	
	TH 18		578356	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	U 40		578386	
SAVEUR REFLEX PEX Water	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 32		578364	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SAVEUR REFLEX PEX-AL-PEX Gas	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
Schütz duo-flex tri-o-flex	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 20		578358
	TH 25		578360
Schwer Fittings AQUApress	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
Seppelfricke VSH SudoPress C-Stahl Visu-Control	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
Seppelfricke VSH SudoPress Edelstahl Visu-Control	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
Seppelfricke VSH SudoPress Kupfer Visu-Control	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
	V 12		578324
	V 15		578328
Seppelfricke VSH SudoPress Kupfer Gas Visu-Control	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
Seppelfricke VSH SudoPress Kupfer Solar Visu-Control	V 15		578328
	V 18		578332
	V 22		578334
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
Seppelfricke VSH XPress C-Stahl	V 22 S (PR-2B)	Mini Z8	574758
	M 12		578310
	M 15		578312
	M 18 ¹⁾		578314
	M 22		578316
Seppelfricke VSH SudoPress Kupfer Solar Visu-Control	M 28 ¹⁾		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Seppelfricke VSH XPress Edelstahl	M 15		578312	
	M 18 ¹⁾		578314	
	M 22		578316	
	M 28 ¹⁾		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
	M 35 S (PR-2B)	Mini Z8	574746	
Seppelfricke VSH XPress Edelstahl gas	M 15		578312	
	M 18 ¹⁾		578314	
	M 22		578316	
	M 28 ¹⁾		578318	
	M 35		578390	
Seppelfricke VSH XPress Kupfer	M 12		578310	
	M 15		578312	
	M 18 ¹⁾		578314	
	M 22		578316	
	M 28 ¹⁾		578318	
	M 35		578390	
	M 12 S (PR-2B)	Mini Z8	574736	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
Seppelfricke VSH XPress Kupfer gas	M 15		578312	
	M 18 ¹⁾		578314	
	M 22		578316	
	M 28 ¹⁾		578318	
	M 35		578390	
	SESTA SESTA GAS	TH 14		578348
		TH 16		578352
		TH 20		578358
		TH 26		578362
		TH 32		578364
SESTA sistema multistrato	H 16		578400	
	H 20		578406	
	TH 14		578348	
	TH 16		578352	
	TH 18		578356	
	TH 20		578358	
	TH 26		578362	
	TH 40		578624	
	U 16		578374	
	U 20		578378	
SIGMA LI Premium	TH 16		578352	
	TH 20		578358	
	TH 25		578360	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 32 S (PR-2B)	Mini Z8	574798	
	U 16		578374	
	U 20		578378	
	U 25		578380	
SLOVARM PEX-THERM	U 32		578382	
	U 16		578374	
	U 20		578378	
	H 26		578410	
	U 32		578382	
	H 16		578400	
	H 20		578406	
	H 26		578410	
	H 32		578412	
	STANDARD HIDRAULICA MultiStandard	H 16		578400
H 20			578406	
H 25			578408	
H 32			578412	
Rfz 16			578492	
Rfz 20			578494	
Rfz 25			578496	
Rfz 32			578498	
TH 16			578352	
TH 20			578358	
steeltrade Presssystem Edelstahl Kontur M	TH 25		578360	
	TH 32		578364	
	TH 16 S (PR-2B)	Mini Z8	574782	
	TH 20 S (PR-2B)	Mini Z8	574788	
	TH 32 S (PR-2B)	Mini Z8	574798	
	U 16		578374	
	U 18		578376	
	U 20		578378	
	U 25		578380	
	U 32		578382	
STELBI Polikraft	U 40		578386	
	M 15		578312	
	M 18 ¹⁾		578314	
	M 22		578316	
	M 28 ¹⁾		578318	
	M 35		578390	
	M 15 S (PR-2B)	Mini Z8	574738	
	M 18 S (PR-2B)	Mini Z8	574740	
	M 22 S (PR-2B)	Mini Z8	574742	
	M 28 S (PR-2B)	Mini Z8	574744	
STELBI Polikraft	M 35 S (PR-2B)	Mini Z8	574746	
	H 16		578400	
	H 20		578406	
	H 26		578410	
	TH 16		578352	
	TH 20		578358	
	TH 26		578362	
	TH 32		578364	
	TH 40		578624	
	TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788		
TH 26 S (PR-2B)	Mini Z8	574794		
TH 32 S (PR-2B)	Mini Z8	574798		
U 16		578374		
U 20		578378		
C 26		578392		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
STELBI Stelgas	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
STH Westco COPPER PRESS	M 15		578312
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 22 S (PR-2B)	Mini Z8	574742
TDM BRASS Serie 1600	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	T		
	H 16		578400
	H 18		578404
	H 20		578406
	H 25		578408
	H 26		578410
	H 32		578412
	TH 16		578352
TDM BRASS Serie 2600	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	THL 32		578368
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	U 16		578374
	U 18		578376
TDM BRASS Serie 1700 gas	U 20		578378
	U 25		578380
	C 26		578392
	U 32		578382
	TH 16		578352
	TH 20		578358
	TH 26		578362
	THL 32		578368
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
TermoConcept TC-PRESS	TH 26 S (PR-2B)	Mini Z8	574794
	Basic E01 ²⁾		578618
THERMOLUTZ	H 14		578398
	H 16		578400
	TH 20		578358
	TH 20 S (PR-2B)	Mini Z8	574788
TE-SA TE-SA press serie 800	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
THERMACOME ACOPEX ALU	TH 32 S (PR-2B)	Mini Z8	574798
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	U 16		578374
TIEMME AL-COBRAPEX Serie 1650	U 20		578378
	U 32		578382
	TH 14		578348
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 25		578360
	TH 26		578362
	THL 32		578368
	TH 40		578624
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
TIEMME Serie 1700 PE-X a pressare	RFz 12		578490
	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
TIEMME TIEMME Gas	TH 16		578352
	TH 20		578358
	TH 26		578362
	THL 32		578368
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
TIGRE ALPEX GAS	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
TKM Systemtechnik	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
TRA MULTITRAPRESS	U 16		578374
	U 18		578376
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
TRA TRAPRESS	H 12		578396
	H 16		578400
	H 20		578406
	H 25		578408
	H 32		578412
	RFz 12		578490
	RFz 16		578492
	RFz 20		578494
	RFz 25		578496
	RFz 32		578498
	Tradelink TradePex Crimp Water	K16/P18	
K/20			578594
K/25			578596
K32			578598
K1/40			578600
Tradelink TradePex Crimp Gas	K16/P18		578592
	K/20		578594
	K/25		578596
	K32		578598
	K1/40		578600
TUBIPLAST ITALY MULTILAYER PIPE	H 16		578400
	H 18		578404
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 18		578376
	U 20		578378
	C 26		578392
	U 32		578382
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16		578352
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	TWEETOP	U 16	
U 20			578378
U 25			578380
U 32			578382
U 40			578386
U			
UNICAL AG MAX-MULTIPEX	U 16		578374
	U 20		578378
	H 26		578410
	C 26		578392
	U 32		578382

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
UNIDELTA DELTAPRESS	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	U 16		578374
UNIDELTA DELTAPRESS GAS	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	U 16		578374
	U 20		578378
U 32		578382	
U 40		578386	
Uponor MLC	UP 14		578576
	UP 16		578578
	UP 18		578580
	UP 20		578582
	UP 25		578584
	UP 32		578586
	U 40		578386
	Uponor MLC-D	UP 16	
UP 20			578582
UP 25			578584
UP 32			578586
Uponor MLC-G	UP 20		578582
	UP 25		578584
	UP 32		578586
Uponor S-Press PLUS	UP 16		578578
	UP 20		578582
	UP 25		578584
	UP 32		578586
Uponor Uni Pipe PLUS	UP 16		578578
	UP 20		578582
	UP 25		578584
	UP 32		578586
V			
Valsir Bravopress	B 16		578468
	B 20		578472
	B 26		578474
	B 32		578476
	F 16		578456
	F 20		578460
	F 26		578462
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	H 32 V		578602
	TH 16		578352
	TH 20		578358
	TH 26		578362
TH 32		578364	
U 16		578374	
U 20		578378	
C 26		578392	
U 32		578382	
Valsir PEXAL	H 14		578398
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	H 32 V		578602
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	U 16		578374
	U 20		578378
C 26		578392	
U 32		578382	

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Van Marcke NV Tubipex	TH 16		578352
	TH 17		578354
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
Van Marcke NV Tubipress	M 12		578310
	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
Variotherm System TH	TH 11,6		578344
	TH 16		578352
	TH 20		578358
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
VESBO CARBON	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
VESBO INOX	M 15		578312
	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
VESBO MULTIPRESS TH-U	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
VESBO VPREMIUM	U 16		578374
	U 20		578378
	C 26		578392
	U 32		578382
	U 40		578386
Viega Fonterra	VX 12		578550
	VP 14/15		578480
	VP 16/17		578482
	VP 20		578484
	VP 25		578486
Viega MegaPress (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega MegaPress 304 FKM (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega MegaPress 316 (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega MegaPress 316 FKM (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega MegaPress CuNi (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega MegaPress FKM (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega MegaPressG (ASTM) ³⁾	VMP ½" (OD 21,3 mm)		578662
Viega Megapress (EN) ⁴⁾	VMP ¾" (OD 17,2 mm) VMP ½" (OD 21,3 mm)		578660 578662
Viega Megapress S (EN) ⁴⁾	VMP ¾" (OD 17,2 mm) VMP ½" (OD 21,3 mm)		578660 578662
Viega Pexfit	VX 16		578552
	VX 20		578554
	VX 25		578556
	VX 16		578552
	VX 20		578554
Viega Pexfit Fosta G	VX 25		578556
	VX 16		578552
	VX 20		578554
Viega Prestabo	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 12 S (PR-2B)	Mini Z8	574748
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Viega Profipress	V 12		578324	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	Viega Profipress G	V 12		578324
		V 15		578328
		V 18		578332
V 22			578334	
V 28			578336	
V 35			578604	
V 12 S (PR-2B)		Mini Z8	574748	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
Viega Profipress S		V 12		578324
		V 15		578328
		V 18		578332
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
	V 28 S (PR-2B)	Mini Z8	574760	
	V 35 S (PR-2B)	Mini Z8	574762	
	Viega Profipress Therm	V 12		578324
		V 15		578328
		V 18		578332
V 22			578334	
V 28			578336	
V 35			578604	
V 12 S (PR-2B)		Mini Z8	574748	
V 15 S (PR-2B)		Mini Z8	574752	
V 18 S (PR-2B)		Mini Z8	574756	
V 22 S (PR-2B)		Mini Z8	574758	
V 28 S (PR-2B)		Mini Z8	574760	
V 35 S (PR-2B)		Mini Z8	574762	
Viega ProPress (ASTM) ³⁾		VUS ½" (OD 15,9 mm)		578566
		VUS ¾" (OD 22,2 mm)		578568
		VUS 1" (OD 28,6 mm)		578570
	VUS 1¼" (OD 34,9 mm)		578606	
	VUS 1½" (OD 38,1 mm)		578636	
Viega ProPress 304 FKM (ASTM) ³⁾	VUS ½" (OD 15,9 mm)		578566	
	VUS ¾" (OD 22,2 mm)		578568	
	VUS 1" (OD 28,6 mm)		578570	
	VUS 1¼" (OD 34,9 mm)		578606	
	VUS 1½" (OD 38,1 mm)		578636	
Viega ProPress 316 (ASTM) ³⁾	VUS ½" (OD 15,9 mm)		578566	
	VUS ¾" (OD 22,2 mm)		578568	
	VUS 1" (OD 28,6 mm)		578570	
	VUS 1¼" (OD 34,9 mm)		578606	
	VUS 1½" (OD 38,1 mm)		578636	
Viega ProPress WATER System AUS	VAU 15 (OD 12,7 mm)		578630	
	VAU 20 (OD 19,1 mm)		578632	
	VAU 25 (OD 25,4 mm)		578634	
	VAU 32 (OD 31,8 mm)		578636	
Viega ProPressG GAS System AUS	VAU 15 (OD 12,7 mm)		578630	
	VAU 20 (OD 19,1 mm)		578632	
	VAU 25 (OD 25,4 mm)		578634	
	VAU 32 (OD 31,8 mm)		578636	
Viega Raxinox	VRX 16		578640	
	VRX 20		578642	
Viega Raxofix	VRX 16		578640	
	VRX 20		578642	
	VRX 25		578644	
	VRX 32		578646	
Viega Sanfix	VP 16/17		578482	
	VP 20		578484	
	VP 25		578486	
	VP 32		578488	
Viega Sanfix Fosta	VP 16/17		578482	
	VP 20		578484	
	VP 25		578486	
	VP 32		578488	
Viega Sanpress	V 12		578324	
	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
	V 12 S (PR-2B)	Mini Z8	574748	
	V 15 S (PR-2B)	Mini Z8	574752	
	V 18 S (PR-2B)	Mini Z8	574756	
	V 22 S (PR-2B)	Mini Z8	574758	
Viega Sanpress Inox	V 15		578328	
	V 18		578332	
	V 22		578334	
	V 28		578336	
	V 35		578604	
V 15 S (PR-2B)	Mini Z8	574752		
V 18 S (PR-2B)	Mini Z8	574756		
V 22 S (PR-2B)	Mini Z8	574758		
V 28 S (PR-2B)	Mini Z8	574760		
V 35 S (PR-2B)	Mini Z8	574762		

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Sanpress Inox G	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
V 35 S (PR-2B)	Mini Z8	574762	
Viega Smartpress	VX 16		578552
	VX 20		578554
	VX 25		578556
Viessmann	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
Vogel & Noot EASYTEC	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 26 S (PR-2B)	Mini Z8	574794
	TH 32 S (PR-2B)	Mini Z8	574798
VSH MultiPress	U 14		578372
	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
	TH 14		578348
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 32 S (PR-2B)	Mini Z8	574798
VSH MultiPress Gas	U 16		578374
	U 20		578378
	U 25		578380
	TH 16		578352
	TH 20		578358
VSH SudoPress Carbon	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 32 S (PR-2B)	Mini Z8	574798
	V 12		578324
	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
V 12 S (PR-2B)	Mini Z8	574748	
V 15 S (PR-2B)	Mini Z8	574752	
V 18 S (PR-2B)	Mini Z8	574756	
V 22 S (PR-2B)	Mini Z8	574758	
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	
VSH SudoPress Copper	V 12		578324
	V 14		578326
	V 15		578328
	V 16		578330
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 12 S (PR-2B)	Mini Z8	574748
	V 14 S (PR-2B)	Mini Z8	574800
	V 15 S (PR-2B)	Mini Z8	574752
	V 16 S (PR-2B)	Mini Z8	574802
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
VSH SudoPress Copper Gas	V 12		578324
	V 14		578326
	V 15		578328
	V 16		578330
	V 18		578332
	V 22		578334
	V 28		578336
V 35		578604	
VSH SudoPress Stainless	V 15		578328
	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
V 18 S (PR-2B)	Mini Z8	574756	
V 22 S (PR-2B)	Mini Z8	574758	
V 28 S (PR-2B)	Mini Z8	574760	
V 35 S (PR-2B)	Mini Z8	574762	
VSH XPress Carbon	M 12		578310
	M 15		578312
	M 18 ¹⁾		578314
	M 22		578316
	M 28 ¹⁾		578318
	M 35		578390
	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
VSH XPress Copper	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	M 12		578310
	M 15		578312
	M 18 ¹⁾		578314
	M 22		578316
	M 28 ¹⁾		578318
	M 35		578390
VSH XPress Copper GAS	M 12 S (PR-2B)	Mini Z8	574736
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
	M 15		578312
	M 18 ¹⁾		578314
VSH XPress Stainless Gas	M 22		578316
	M 28 ¹⁾		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
W			
Watts MTR Art press	TH 16		578352
	TH 20		578358
	TH 26		578362
	TH 32		578364
WATTS RADIANT Watts WaterPEX	US ¾"		578534
	US ½"		578536
	US ¾"		578538
WATTS RADIANT Watts RadiantPEX	US 1"		578540
	US ¾"		578534
	US ½"		578536
	US ¾"		578538

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WATTS	U 16 (1/2")		578374
RADIANT	U 20 (5/8")		578378
Watts	U 25 (3/4")		578380
RadiantPEX-AL	U 32 (1")		578382
Wavin	B 16		578468
Tigris K5/M5	B 20		578472
	B 32		578476
	H 16		578400
	H 20		578406
	H 25		578408
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 25		578360
	TH 32		578364
	TH 40		578624
	TH 16 S (PR-2B)	Mini Z8	574782
	TH 20 S (PR-2B)	Mini Z8	574788
	TH 32 S (PR-2B)	Mini Z8	574798
	U 16		578374
	U 20		578378
	U 25		578380
	U 32		578382
	U 40		578386
	UP 16		578578
	UP 20		578582
	UP 25		578584
	UP 32		578586
WEECON	M 15		578312
PRESS-C-Stahl	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
WEECON	M 15		578312
PRESS-Edelstahl	M 18		578314
	M 22		578316
	M 28		578318
	M 35		578390
	M 15 S (PR-2B)	Mini Z8	574738
	M 18 S (PR-2B)	Mini Z8	574740
	M 22 S (PR-2B)	Mini Z8	574742
	M 28 S (PR-2B)	Mini Z8	574744
	M 35 S (PR-2B)	Mini Z8	574746
WEECON	V 15		578328
PRESS-Kupfer	V 18		578332
	V 22		578334
	V 28		578336
	V 35		578604
	V 15 S (PR-2B)	Mini Z8	574752
	V 18 S (PR-2B)	Mini Z8	574756
	V 22 S (PR-2B)	Mini Z8	574758
	V 28 S (PR-2B)	Mini Z8	574760
	V 35 S (PR-2B)	Mini Z8	574762
WEM	U 16		578374
WIELAND	TH 14		578348
cuprotherm	TH 16		578352
CTX	TH 18		578356
	TH 20		578358
	TH 26		578362

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WKS-Press	TH 14		578348
	TH 16		578352
	TH 17		578354
	TH 20		578358
	TH 26		578362
WÜRTH	TH 32		578364
	TH 40		578624
	TH 16		578352
WÜRTH	TH 20		578358
	TH 26		578362
	HE 32		578370
X			
XtraConnect	F 16		578456
	F 20		578460
	F 26		578462
	F 32		578464
	F 16 S (PR-2B)	Mini Z8	574728
	F 20 S (PR-2B)	Mini Z8	574730
	F 26 S (PR-2B)	Mini Z8	574732
	F 32 S (PR-2B)	Mini Z8	574734
	H 16		578400
	H 20		578406
	H 26		578410
	H 32		578412
	TH 16		578352
	TH 20		578358
	TH 26		578362
TH 32		578364	
TH 16 S (PR-2B)	Mini Z8	574782	
TH 20 S (PR-2B)	Mini Z8	574788	
TH 26 S (PR-2B)	Mini Z8	574794	
TH 32 S (PR-2B)	Mini Z8	574798	
U 16		578374	
U 20		578378	
(DN 26)	U 25		578380
	U 32		578382
	VP 16		578482
	VP 20		578484
	VP 32		578488
Y			
YX COPPER	Yz 16 UNI		578740
UNIPEX Water & Gas (AUS)	Yz 20 UNI		578742
	Yz 25 UNI		578744
	Yz 32 UNI		578746
Z			
ZEWOTHERM	TH 12		578346
Zewo Press Premium	TH 16		578352
	TH 17		578354
	TH 18		578356
	TH 20		578358
	TH 26		578362
	TH 32		578364
	TH 40		578624
ZEWOTHERM	TH 16		578352
Zewo Press PPSU	TH 20		578358
	TH 26		578362
	TH 32		578364
ZURN	US 3/8"		578534
INDUSTRIES	US 1/2"		578536
ZURN PEX	US 3/4"		578538
	US 1"		578540

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 180 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

Accessories

Description	Art.-No.
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704
Steel case with insert for 8 pressing tongs Mini/cropping tongs Mini and compartment for pipe cutter up to 42 mm	578295
L-Boxx system case with insert for 11 pressing tongs Mini and 6 pressing rings S (PR-2B)	578659



REMS cropping tongs Mini

Accessories for REMS radial presses 22 kN

High performance cropping tongs Mini in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to
hardness classification 4.8 (400 N/mm²) M 6 – M 10

REMS cropping tongs Mini – cuts in just 2 seconds!

Made of forged and specially hardened steel.



Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process. Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr.

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting.

Cutting device in pliers design (**Patent EP 1 459 825, patent US 7,284,330**). Very compact design and low weight of the REMS Mini cropping tongs due to special arrangement of the cropping tongs connection (**Patent EP 1 952 948**). Recesses in the connecting plate for safe guidance of the connecting lugs for offset-free pressing (**Patent EP 2 347 862**).

Can be driven by all REMS radial presses 22 kN.



German Quality Product



Patent EP 1 952 948
Patent EP 1 459 825
Patent US 7,284,330
Patent EP 2 347 862

Supply format

REMS cropping tongs Mini. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6 – M 10. In a carton.

Description	for threaded rods	Art.-No.	
REMS cropping tongs Mini M 6	M 6	578620	
REMS cropping tongs Mini M 8	M 8	578621	
REMS cropping tongs Mini M 10	M 10	578622	

Accessories

Description	for threaded rods	Art.-No.	
Cropping inserts M 6 (pair)	M 6	571891	
Cropping inserts M 8 (pair)	M 8	571896	
Cropping inserts M 10 (pair)	M 10	571866	
Steel case with insert for 8 pressing tongs Mini/cropping tongs Mini and compartment for pipe cutter up to 42 mm		578295	



Universal, manual radial press for producing pipe pressing joints for common pressfitting systems.

Pressing joints with plastic and multi-layer composite tubes \varnothing 10–26 mm
 \varnothing $\frac{3}{8}$ –1"

Complete range of REMS pressing tongs for all common pressfitting systems, see page 198–236.

REMS Eco-Press – universal up to \varnothing 26 mm. Secure crimping in seconds.

System advantage

Only **one** type of pressing tongs for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs for all common pressfitting systems (page 198–236). Highly durable pressing tongs made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing.

Design

Compact, handy, light. Drive unit with short tubular arms only 1.6 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs through locking pins. Dividable tubular arms for individual adjustment of leverage to accommodate different force demands of different pressfitting systems.

Pressing operation

A perfect joint is achieved when pressing tongs close completely. Final-lock-positioning, the pressing jaws remain in a closed position until opening. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.



Two connections for REMS Eco-Press manual radial press and REMS 32 kN radial presses.

German Quality Product



Info

Supply format

REMS Eco-Press drive unit. Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes \varnothing 10–26 mm, \varnothing $\frac{3}{8}$ –1". For operating with REMS pressing tongs. With dividable tubular arms. In skin package.

	Art.-No.
	574000



Accessories

Description	Art.-No.
REMS pressing tongs , see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
Carrying bag for drive unit and for 3 pressing tongs	574436
Steel case with insert for drive unit and for 3 pressing tongs	574430



REMS Power-Press SE

Electric radial press 32 kN

Universal, handy electric tool for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Power-Press SE – universal up to \varnothing 110 mm.
Secure crimping in seconds.
Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing chains.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. The pressing tongs remain in a closed position until machine is switched and runs into reverse. The perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-mechanical drive with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Overload protection. Safety tip switch.



German Quality Product



Supply format

REMS Power-Press SE Basic-Pack. Electric radial press 32 kN for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In sturdy steel case.

	Art.-No.
	572111

Other voltages on request.

Accessories

Description	Art.-No.
REMS Power-Press SE Drive Unit	572101
REMS pressing tongs/pressing rings see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Steel case with insert	570280



REMS Power-Press

Electro-hydraulic radial press 32 kN
with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 198 – 236.

REMS Power-Press – universal up to \varnothing 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



Two connections for
REMS Eco-Press manual
radial press and REMS
32 kN radial presses.

German Quality Product



Info

Supply format

REMS Power-Press Basic-Pack. Electro-hydraulic radial press 32 kN with switch-off signal for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing chains. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	Art.-No.
In sturdy steel case.	577011
In L-Boxx system case.	577012

Other voltages on request.

Accessories

Description	Art.-No.
REMS Power-Press Drive Unit	577001
REMS pressing tongs/pressing rings see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Steel case with insert	570280
L-Boxx system case with inserts	571283



REMS Power-Press ACC

Electro-hydraulic radial press 32 kN with automatic retraction

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Power-Press ACC – universal up to \varnothing 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product



Info

Supply format

REMS Power-Press ACC Basic-Pack. Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	Art.-No.
In sturdy steel case.	577010
In L-Boxx system case.	577013

Other voltages on request.



Accessories

Description	Art.-No.
REMS Power-Press ACC Drive Unit	577000
REMS pressing tongs/pressing rings see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Steel case with insert	570280
L-Boxx system case with inserts	571283



REMS Power-Press XL ACC

Electro-hydraulic radial press XL 32 kN
with automatic retraction

Universal, powerful power tool with automatic circuit control for making press joints of all common press fitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing 3/8 – 4"

Complete range of REMS pressing tongs/pressing rings/
pressing rings XL for all common pressfitting systems,
see page 198 – 236.

**REMS Power-Press XL ACC – universal up to \varnothing 110 mm.
Pressing of \varnothing 10 – 108 mm in just one action.
Ultra-fast, e.g. Geberit Mapress stainless steel \varnothing 108 mm
in only 15 seconds. With automatic circuit control.
Automatic locking of pressing tongs.**

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings/pressing rings XL for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/XL pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings/pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs are required, as an accessory, for driving the REMS (PR) pressing rings.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.5 kg. Long working stroke for pressings in a single action, ideal for large dimensions. Ultra-fast, e.g. Geberit Mapress stainless steel \varnothing 108 mm in only 15 seconds. Ergonomically designed housing with soft grip and recessed handle. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings. Adjustable hand guard.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product



Info

Supply format

REMS Power-Press XL ACC Basic-Pack. Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing 3/8 – 4". For driving REMS pressing tongs/pressing rings/pressing rings XL and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	Art.-No.
In transport case XL.	579010
In XL-Boxx system case.	579012

Other voltages on request.



Accessories

Description	Art.-No.
REMS Power-Press XL ACC drive Unit	579000
Adapter tongs Z6 XL for driving REMS pressing rings 64.0 – 108.0 XL (PR-3S), 2 1/2 – 4" XL (PR-3S) with REMS Power-Press XL ACC	579120
Adapter tongs for other REMS pressing rings see page 236.	
REMS pressing tongs/pressing rings/pressing rings XL see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Transport case XL with inlays and practical carrying handles	579240
XL-Boxx system case with inserts	579601





REMS Akku-Press 14 V

Cordless radial press 32 kN with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints \varnothing 10 – 108 (110) mm / \varnothing $\frac{3}{8}$ – 4

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press 14 V – universal up to \varnothing 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings

ViEGA Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 5.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings ViEGA Profipress DN 15 with one battery charge*. Operating temperature range -10 to $+60$ °C. No memory effect for maximum battery power. Rapid charger 220–240 V or 110 V, 10.8–18 V, 65 W, for short charging times. Voltage supply 220–240 V/14.4 V, 33 A output, for mains operation instead of Li-Ion battery 14.4 V, as accessory.



German Quality Product



Info



Supply format

REMS Akku-Press 14 V Basic-Pack. Cordless radial press 32 kN with switch-off signal for producing pipe pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 5.0 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	Art.-No.
In sturdy steel case.	571013
In L-Boxx system case.	571020

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 14 V drive unit, without battery	571003
Battery Li-Ion 14.4 V, 5.0 Ah	571555
Rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W	571560
Voltage supply 220–240 V/14.4 V, 50–60 Hz, 33 A, for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
L-Boxx system case with inserts	571283



REMS Akku-Press 14 V ACC

Cordless radial press 32 kN with automatic circuit control

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints \varnothing 10–108 (110) mm / \varnothing $\frac{3}{8}$ –4

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 198–236.

REMS Akku-Press 14 V ACC – universal up to \varnothing 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs. Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 5.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings Viega Profipress DN 15 with one battery charge*. Operating temperature range -10 to $+60$ °C. No memory effect for maximum battery power. Rapid charger 220–240 V or 110 V, 10.8–18 V, 65 W, for short charging times. Voltage supply 220–240 V/14.4 V, 33 A output, for mains operation instead of Li-Ion battery 14.4 V, as accessory.



German Quality Product



Info



Supply format

REMS Akku-Press 14 V ACC Basic-Pack. Cordless radial press 32 kN with automatic circuit control for producing pipe pressing joints Ø 10–108 (110) mm, Ø 3/8–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 5.0 Ah, rapid charger 220–240V or 110 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	Art.-No.
In sturdy steel case.	571014
In L-Boxx system case.	571019

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 14 V ACC drive unit, without battery	571004
Battery Li-Ion 14.4 V, 5.0 Ah	571555
Rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W	571560
Voltage supply 220–240 V/14.4 V, 50–60 Hz, 33 A, for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
L-Boxx system case with inserts	571283



REMS Akku-Press 22V ACC

Cordless radial press 32 kN with automatic circuit control and pressure monitoring

Universal, handy electric tool with automatic circuit control and pressure monitoring for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 198 – 236.

REMS Akku-Press ACC – universal up to \varnothing 110 mm. With automatic circuit control and pressure monitoring. Anti-vibration system. Secure crimping in seconds. Automatic locking of pressing tongs. Li-Ion 21.6 V, 2.5 Ah battery for approx. 200 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, super light. Drive unit with battery only 3.2 kg. Drive unit with pressing tongs V 15 only 35.5 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing tongs seat, rotation angle $> 360^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking. Also for other suitable makes of pressing tongs/pressing rings.

Pressure monitoring

Monitoring of the pressure during the pressing process. Pressure evaluation with coloured LED.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation


Li-Ion 22V Technology. Highly resistant Li-Ion 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6 V, 2.5 Ah batteries for approx. 200 pressings, 4.4 Ah for approx. 350 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/21.6 V, 15 A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



German Quality Product



Info

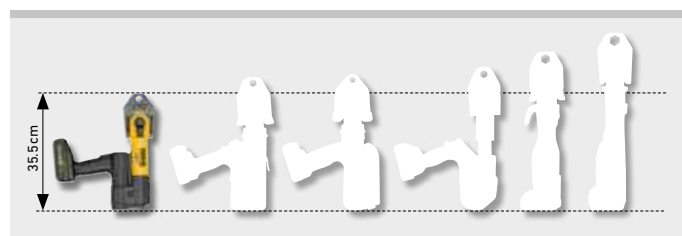

The little one amongst the big. Only 3.2 kg.



Supply format

REMS Akku-Press 22 V ACC Basic-Pack. Cordless radial press 32 kN with automatic circuit control and pressure monitoring for making press joints \varnothing 10–108 (110) mm, \varnothing $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 100–240 V, 50–60 Hz, 90 W.

Version	Art.-No.
In sturdy steel case.	576010
In L-Boxx system case.	576011

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 22 V ACC drive unit, without battery	576000
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240 V, 50–60 Hz, 90 W	571585
Rapid charger 100–240 V, 50–60 Hz, 290 W	571587
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A, for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	571290
L-Boxx system case with inserts	571283
REMS Lumen 2800 22 V, cordless LED flood light, see page 111	



REMS Akku-Press 22V ACC Connected

Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display

Universal, handy electric tool with Connected functionality via Wi-Fi radio standard and OLED display for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints Ø 10 – 108 (110) mm
Ø 3/8 – 4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press 22V ACC Connected – universal up to Ø 110 mm. With Connected functionality via Wi-Fi radio standard and OLED display. Selectable ACC drive mode. Pressure monitoring. Anti-vibration system. Automatic locking of pressing tongs. Electrically monitored closing position of the tong retaining bolt. Secure crimping in seconds. Voice recordings with voice recognition. Creating reports with texts and pictures. Geolocalisation of the pressing sites. Li-Ion 21.6V, 2.5 Ah battery for approx. 200 pressings. Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, super light. Drive unit with battery only 3.3 kg. Drive unit with pressing tongs V 15 only 36.3 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with strong carrying ring for a shoulder strap. Soft-grip surfaces. Two rows of LED work lights for illuminating the workplace as required, adjustable brightness in 4 stages and lighting time. Machine status check with charging state indication by 2-coloured green/red LED. Swivelling pressing tongs seat, rotation angle > 360°. Secure seating of pressing tongs/adapter tongs by automatic locking. Electrically monitored closing position of the tong retaining bolt. Also for other suitable makes of pressing tongs/pressing rings.

Connected functionality

REMS Akku-Press 22V ACC Connected offers various additional functionalities such as, for example: Recording of measuring/pressing data, creation of reports with your own company logo, display of error messages, configuration of the product (language, date, time, time zone, pressure unit, LED lighting time and LED brightness, standby time, ACC drive mode, information signal tones, etc.), set-up of usage bars (immediate bar or feedback interval as anti-theft, time and date ranges for barring times, limitation of the number of performable pressings), geolocalisation of the pressing sites, conversion of voice recordings into editable text, upload and save images of pressings, display of notices (annual inspection and periodic testing, new firmware version, battery state, etc.), download and installation of new firmware version.

Pressure monitoring


Monitoring and display of pressure and maximum pressure during the pressing process. Pressure analysis after the pressing process with result display in the OLED display and with coloured LEDs. Display of the pressure-time diagram of the performed pressing directly in the OLED display.

Voice recordings with voice recognition

A voice recording can be made and stored for every pressing with the microphone integrated into the drive unit. These can be converted into editable text and transferred to reports in the Service Portal.

Wi-Fi connection to the Cloud

REMS Akku-Press 22V ACC Connected sends collected data (measuring and pressing data, error messages, configuration of the product, voice recordings, etc.) to the Cloud after registration and with an existing Internet connection. The data are processed and stored there. The user can access these data, upload and store pictures of pressings, create reports with texts and pictures and change the drive unit settings through the REMS Service Portal. The changes are transferred back to the drive unit via an existing Internet connection.

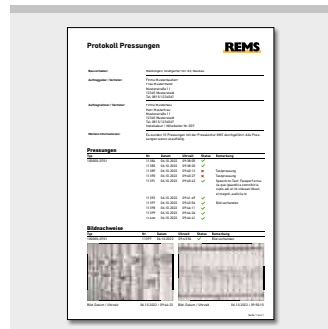

German Quality Product



REMS Akku-Press 22 V ACC Connected

Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display

Selectable ACC drive mode

When ACC drive mode is switched on, the drive unit ends the pressing process automatically, emits an acoustic signal (clicking) and automatically returns (automatic circuit control). When ACC mode is switched off, the drive unit stops just before reaching the required pressure to be able to be able to monitor complete closing of the pressing tongs, pressing ring and pressing segments better at the end of the pressing process. The pressing process must be continued by pressing the safety switch again. The drive unit ends the pressing process automatically, emits an acoustic signal (clicking) and automatically returns (automatic circuit control).

Drive


Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. High-performance, electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400 W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Safety switch.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 2.5 Ah batteries for approx. 210 pressings, 4.4 Ah for approx. 370 pressings, 5.0 Ah for approx. 420 pressings, 9.0 Ah for approx. 750 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 15 A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.

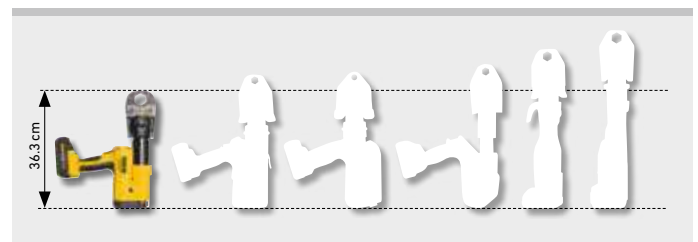

The little one amongst the big. Only 3.3 kg.

Supply format

REMS Akku-Press 22 V ACC Connected Basic-Pack. Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display, for making press joints \varnothing 10–108 (110) mm, \varnothing $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electrically monitored closing position of the tong retaining bolt. Electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Anti-vibration system. Safety tip switch. LED work lights. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 100–240V, 50–60Hz, 90W.

Version	Art.-No.
In sturdy steel case.	576014
In L-Boxx system case.	576015

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 22 V ACC Connected drive unit , without battery	576003
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240V, 50–60 Hz, 90W	571585
Rapid charger 100–240V, 50–60 Hz, 290W	571587
Voltage supply 220–240V/21.6V, 50–60 Hz, 15 A , for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	571290
L-Boxx system case with inserts	571283
REMS Lumen 2800 22V , cordless LED flood light, see page 111	



* Ambient temperature approx. 20°C. Wi-Fi disabled. LED work lights off.

REMS Akku-Press XL 45 kN 22 V ACC

Cordless radial press XL 45 kN
with automatic circuit control

Universal, powerful electric tool with automatic circuit control for producing XL pipe pressing joints for all common pressfitting systems. Thrust force 45 kN. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints XL	Ø 64 – 108 mm
	Ø 2½ – 4"

Complete range of REMS pressing rings XL for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press XL 45 kN 22 V ACC – the powerful one with 45 kN thrust force. Pressing of Ø 64 – 108 mm in a single action. Anti-vibration system. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. With automatic circuit control. Secure seating of adapter tongs by automatic locking.

Li-Ion 21.6 V, 5.0 Ah battery, for approx. 150 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge*.

Pressing rings XL for all common systems

Full range of REMS pressing rings XL for driving by REMS Akku-Press XL 45 kN 22V ACC (page 198 – 236). Highly durable pressing rings XL made of tenacious, specially hardened special steel. Pressing contours of REMS pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing.

Adapter tongs Z7 XL 45 kN

For driving REMS pressing rings XL by REMS Akku-Press XL 45 kN 22V ACC adapter tongs Z7 XL 45 kN are required.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit with battery only 6.5 kg. Long working stroke for pressings in a single action. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing ring seat, rotation angle > 360°. Secure seating of adapter tongs by automatic locking.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 45 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6 V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6 V, 4.4 Ah batteries for approx. 130 pressings, 5.0 Ah batteries for approx. 150 pressings, 9.0 Ah for approx. 270 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/21.6 V, 40 A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



German Quality Product



Info



Supply format

REMS Akku-Press XL 45 kN 22 V ACC Basic-Pack Z7. Cordless radial press 45 kN with automatic circuit control for making press joints XL Ø 64 – 108 mm, Ø 2½ – 4". For driving REMS pressing rings XL. Swivelling pressing ring seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 5.0 Ah, rapid charger 100 – 240 V, 50 – 60 Hz, 90 W. Adapter tongs Z7 XL 45 kN. In XL-Boxx system case.

	Art.-No.
	579014

Other voltages on request.

Accessories

Description	Art.-No.
REMS Akku-Press XL 45 kN 22 V ACC drive unit, without battery	579001
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0 – 108.0 XL (PR-3S), 2½ – 4" XL (PR-3S), 2½ – 4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22 V ACC	579123

REMS pressing rings XL see page 198 – 236

Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A, for mains operation instead of battery Li-Ion 21.6 V	571578
XL-Boxx system case with inserts	579601

REMS Lumen 2800 22 V, cordless LED flood light, see page 111



for all common pressfitting systems

**Select REMS pressing tongs/
REMS pressing rings yourself!**

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 236) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (**Patent EP 2 027 971**).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Adapter tongs required, see page 236.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 236. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing ring (PR-2B)

REMS pressing ring (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Adapter tongs required for driving the REMS (PR-2B) pressing rings, see page 236.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 236.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 237.

Hold-Harmless and Indemnification Agreement

See page 238.



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)




REMS pressing rings (PR-2B)



REMS pressing ring S (PR-2B), continuously swivellable

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

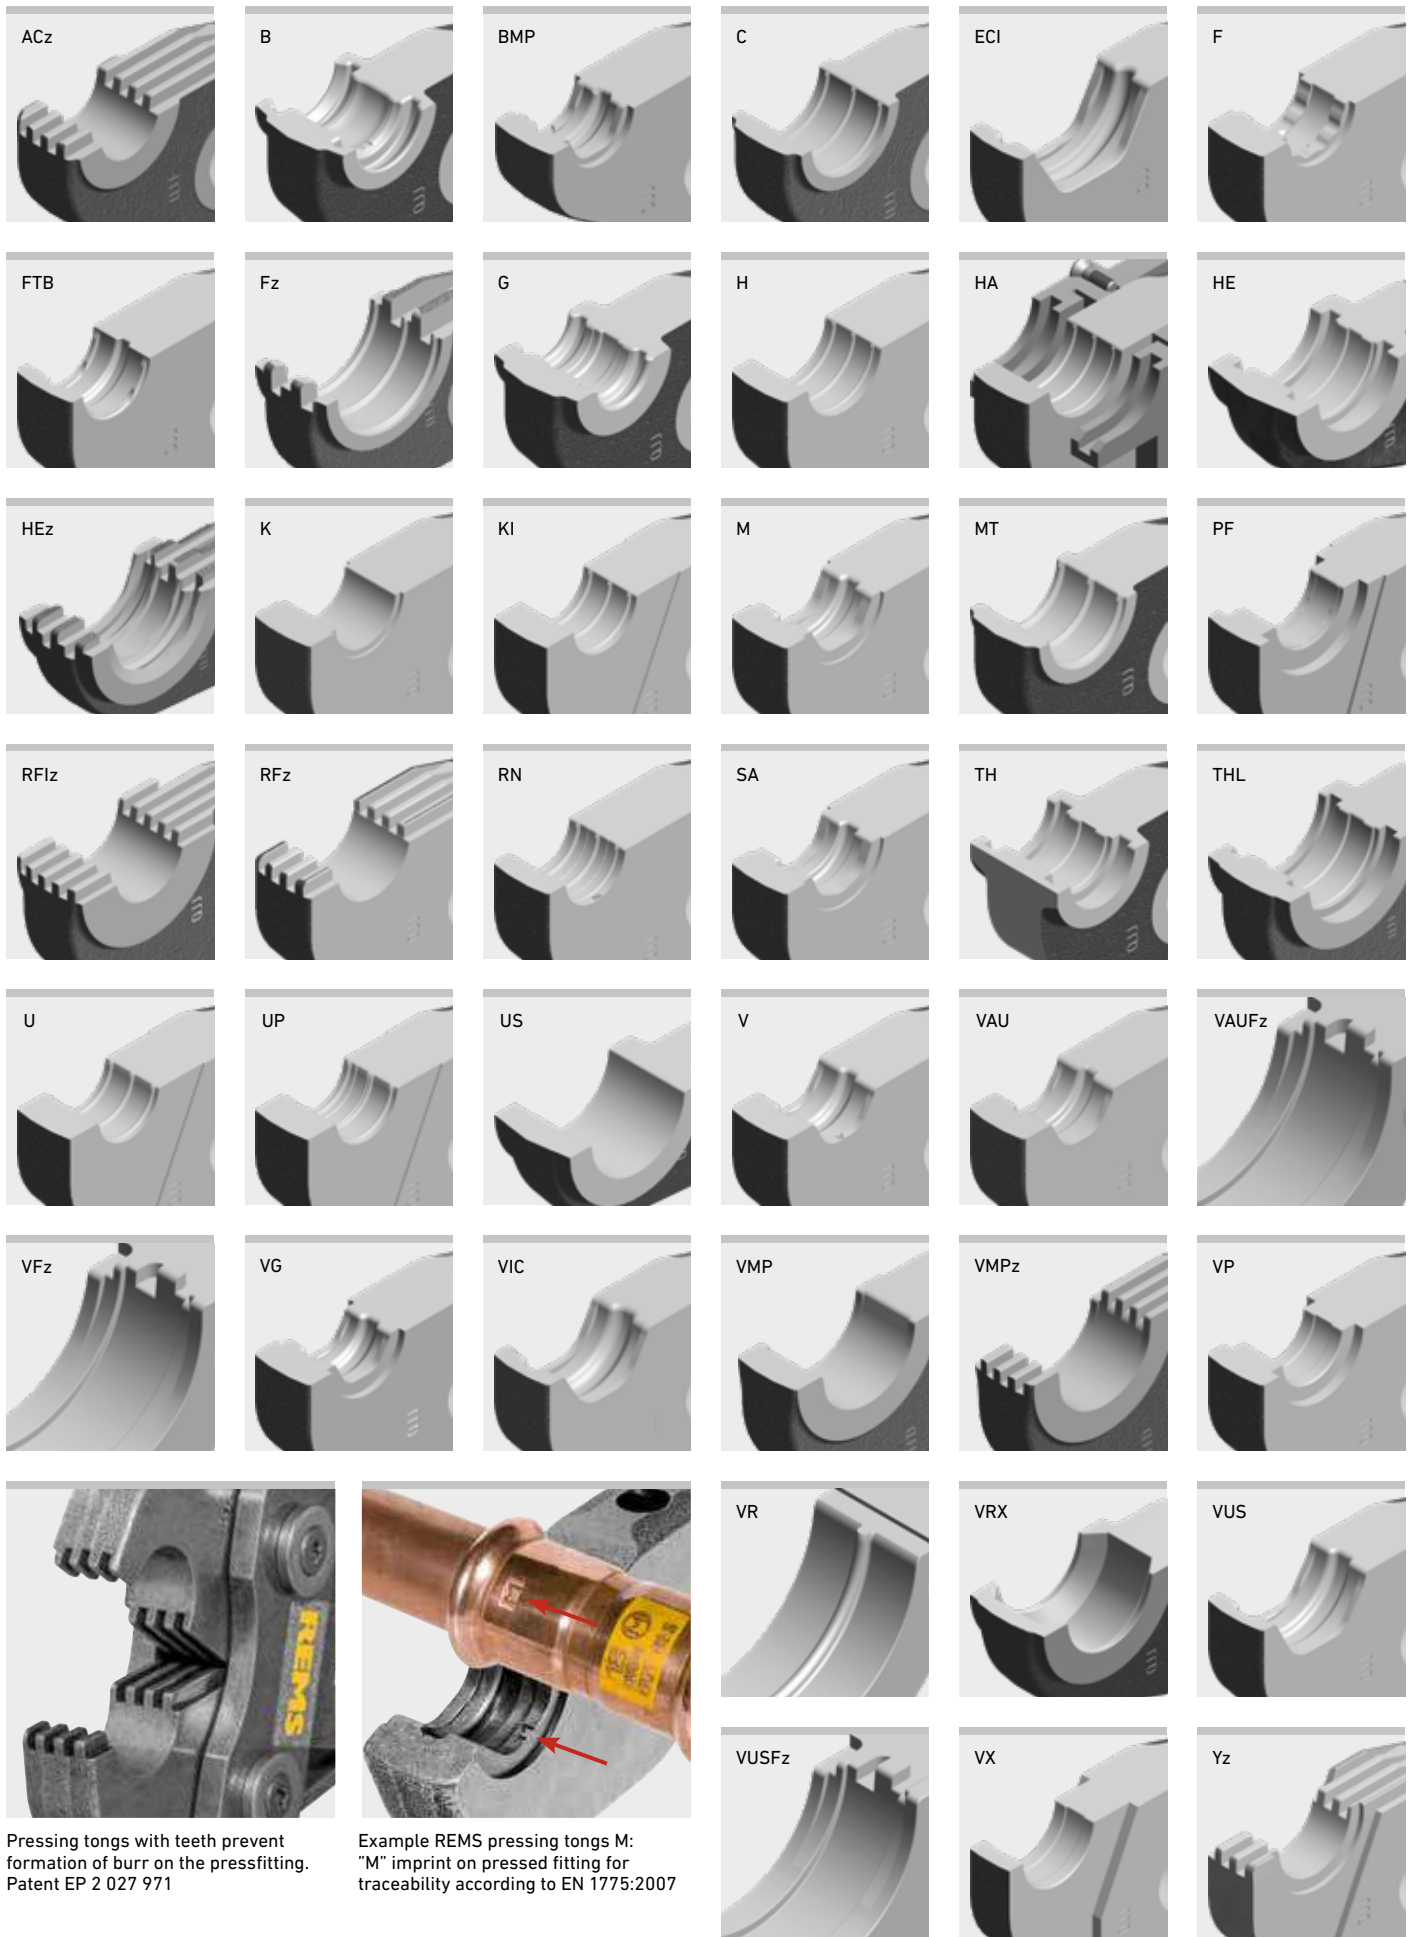

Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs M: "M" imprint on pressed fitting for traceability according to EN 1775:2007

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
A				
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	
	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 32		570380	
	RFz 12*		571320	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	VX 16*		571635	
	VX 20*		571640	
	AC-FIX PRESS DUO (Global Piping Systems)	RFz 16*		571325
RFz 20*			571330	
RFz 25			571335	
RFz 32			571340	
TH 16*			570460	
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
U 16*			570765	
U 20*			570775	
U 25*			570780	
U 32			570785	
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 32		570380	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	ACOME ACOPEX ALU	H 16*		570320
		H 20*		570350
		H 26*		570370
H 32			570380	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
U 16*			570765	
U 20*			570775	
U 32			570785	
ACOME MT	Acz 12*		572642	
	Acz 16*		572644	
	Acz 20*		572646	
	Acz 25		572648	
AHLSELL A-press elförzinkad M	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
AHLSELL A-press elförzinkad V	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
AHLSELL A-press koppar M	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	AHLSELL A-press koppar V	V 12		570107
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 54			570175	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
AHLSELL A-press rostfritt	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	AIRBEL PRESSCLIM	M 15		570110
		M 18		570120
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
AIRBEL SERTINOX		M 15		570110
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	ALB Sistema Multicapa	TH 16*		570460
TH 18*			570465	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
H 16*			570320	
H 18*			570340	
H 20*			570350	
H 26*			570370	
H 32			570380	
H 40 (PZ-46)		570390		
U 16*		570765		
U 18*		570770		
U 20*		570775		
C 26*		570750		
U 32		570785		
U 40		570790		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
ALB Sistema Multicap Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	C 26*		570750
U 32		570785	
ALTECH Altech	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
APE MULTYGAS Serie AP Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
APE Serie AP	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	APE Serie APL	H 16*	
H 18*			570340
H 20*			570350
H 26*			570370
H 32			570380
TH 16*			570460
TH 18*			570465
TH 20*			570470
TH 26*			570475
TH 32			570480
TH 40			570485
TH 50 (PZ-S)			572400
TH 63 (PZ-S)			572405
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 18*			570770
U 20*		570775	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
AQUATECHNIK Press-fitting metal	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
U 16*		570765	
U 20*		570775	
C 26*		570750	
U 32		570785	
AQUATECHNIK Universal	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
H 32		570380	
TH 16*		570460	
TH 20*		570470	
TH 26*		570475	
TH 32		570480	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
C 26*		570750	
U 32		570785	
ARKA DUROsystem	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
U 20*		570775	
Aschl NIR	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
ASSOTHERM IPC-RAC Carbon Steel	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
ASSOTHERM IPI-RAX Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
ASSOTHERM IPI-RAX Inox Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
ASSOTHERM IPM-Multistrato	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
U 20*		570775	
C 26*		570750	
U 32		570785	
ASSOTHERM IPR-RAA Copper	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
ASSOTHERM IPR-RAA Copper Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"		571450	
	US 1/2"		571455	
	US 3/4"		571460	
	US 1"		571465	
	US 1 1/4"		571470	
	US 1 1/2"		571475	
	US 2"		571477	
ATUSA ITALIA SYCPRESS CARBON STEEL PRESS FITTINGS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738		
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	ATUSA ITALIA SYCPRESS STAINLESS STEEL PRESS FITTINGS	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738		
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16*		570460
		TH 20*		570470
		TH 25*		570495
		TH 32		570480
		U 16*		570765
U 20*			570775	
U 25*			570780	
U 32		570785		
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
AYOR FIXOCONNECT Press	H 12*		570300	
	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	RFz 12*		571320	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	U 16*		570765	
	U 20*		570775	
AYOR FIXOMULTIX	U 25*		570780	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 20*		570775		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
U 75 (PR-3B)	Z4	572828		
AYOR SOMATHERM FOR YOU -1	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794		
U 16*		570765		
U 20*		570775		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
AYOR	H 12*		570300
SOMATHERM	H 16*		570320
FOR YOU - 2	H 20*		570350
	H 25*		570360
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	U 16*		570765
	U 20*		570775
	U 25*		570780
B			
Bampi BALPEX serie LP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Bampi BALPEX serie MP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
Bampi BALPEX Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	RFz 16*		571325	
	RFz 18*		571327	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
U 25*		570780		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
BEGETUBE/ IVAR	B 14*		570845	
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	Fz 40		570742	
	Fz 50		570747	
	F 63 (PZ-S)		572385	
	Fz 75 (PR-3B)	Z4	572830	
	Béné inox Série 41	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88.9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108.0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)	Z8	574746		
Brass Form Master Press	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	U 16*		570765	
	U 18*		570770	
U 20*		570775		
Brass & Fittings PRESSMAN MultiPress	RFz 16*		571325	
	RFz 18*		571327	
	ACz 20*		572646	
Brass & Fittings PRESSMAN RetiPress	RFz 25		571335	
	RFz 32		571340	
	RFz 16*		571325	
RFz 18*		571327		
ACz 20*		572646		
RFz 25		571335		
RFz 32		571340		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC.
- 4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- 7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- 8) For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
BRASSTECH MULTItermoSAN Brasspress	B 16*		570850	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 26*		570370	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	C 26*		570750	
	U 32		570785	
	C			
	Cello Products >B< Press	VUS ½" (OD 15,9 mm)		571770
VUS ¾" (OD 22,2 mm)			571775	
VUS 1" (OD 28,6 mm)			571780	
VUS 1¼" (OD 34,9 mm)			571785	
VUS 1½" (OD 41,3 mm)			571790	
VUS 2" (OD 54,0 mm)			571795	
CGR DYNAFLU multicouche	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
U 20*		570775		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
CGR DYNAFLU PER	H 12*		570300	
	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	Rfz 12*		571320	
	Rfz 16*		571325	
	Rfz 20*		571330	
	Rfz 25		571335	
CHIALI CHIALIPEX	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405		
Climatek Clima Therm	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	H 40 A (PZ-4G)		570695	
Climatrix Climatrix Rhinopex	H 16*		570320	
	H 20*		570350	
	U 16*		570765	
	U 20*		570775	
	C 26*		570750	
	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Climatrix Variotherm System TH	TH 11,6*		570482
TH 16*			570460	
TH 16 S (PR-2B)		Z8	574782	
ClouSet	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
Comap PEX Press	Rfz 12*		571320	
	Rfz 16*		571325	
	Rfz 20*		571330	
	Rfz 25		571335	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Comap Multiskin	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	Comap Multiskin Gas	TH 16*	
TH 20*			570470
TH 26*			570475
TH 32			570480
THL 32			570487
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
U 32			570785
H 16*			570320
H 20*			570350
H 26*			570370
H 32			570380
COMISA Press System	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 14*		570310
	H 16*		570320
H 18*		570340	
H 20*		570350	
H 26*		570370	
H 32		570380	
B 14*		570845	
B 16*		570850	
B 18*		570855	
B 20*		570860	
B 26		570870	
B 32		570880	
COMISA Press System Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
CONEL CONNECT MULTI	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
H 32		570380	
TH 16*		570460	
TH 20*		570470	
TH 26*		570475	
TH 32		570480	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 25*		570780	
U 32		570785	
VP 16*		570910	
VP 20*		570915	
VP 32		570925	
(DN 26)			

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
CONEL CONNECT MV2	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Conex Bänninger >B<- Flex	F 16*		570717
F 18*			570720	
F 20*			570727	
F 32			570735	
F 14 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
F 32 S (PR-2B)		Z8	574734	
H 16*			570320	
H 18*			570340	
H 20*			570350	
H 25*			570360	
H 32			570380	
RFz 16*			571325	
RFz 18*			571327	
RFz 20*			571330	
RFz 25			571335	
RFz 32			571340	
TH 16*			570460	
TH 18*			570465	
TH 20*			570470	
TH 25*			570495	
TH 32			570480	
U 16*			570765	
U 18*		570770		
U 20*		570775		
U 25*		570780		
U 32		570785		
Conex Bänninger >B<- MaxiPro	BMP ¼"		571700	
	BMP ⅜"		571702	
	BMP ½"		571704	
	BMP ⅝"		571706	
	BMP ¾"		571708	
	BMP 7/8"		571710	
	BMP 1"		571712	
	BMP 1 1/8"		571714	
Conex Bänninger >B<- Press	V 12		570107	
	V 14		570112	
	V 15		570115	
	V 16		570117	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8	574748	
	V 14 S (PR-2B)	Z8	574800	
	V 15 S (PR-2B)	Z8	574752	
	V 16 S (PR-2B)	Z8	574802	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	Conex Bänninger >B<- Press Carbon	V 15		570115
		V 18		570125
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 54			570175	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Conex Bänninger >B<- Press Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 14 S (PR-2B)	Z8	574800
	V 15 S (PR-2B)	Z8	574752
Conex Bänninger >B<- Press Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	Conex Bänninger >B<- Press Solar	V 12	
V 14			570112
V 15			570115
V 16			570117
V 18			570125
V 22			570135
V 28			570145
V 35			570155
V 42			570165
V 54			570175
V 12 S (PR-2B)		Z8	574748
V 14 S (PR-2B)		Z8	574800
V 15 S (PR-2B)		Z8	574752
Conex Bänninger >B<- Press XL carbon	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B<- Press XL copper	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B) ⁴⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁴⁾	Z5	572817
Conex Bänninger >B<- Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B<- Press XL red brass	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
D			
Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
DIWAsystems	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
DUOPIPE Systems	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
DW Verbundrohr multitubo systems	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
U 75 (PR-3B)	Z4	572828	

E

EBRILLE Isomonflex	U 16*		570765
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	TH 26 S (PR-2B)	Z8	574794
	U 32		570785
EBRILLE Monflex	U 16*		570765
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	TH 26 S (PR-2B)	Z8	574794
	U 32		570785
EFFEBI EFFEBI-PRESS Aisi316 System M Profile ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁵⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
EFFEBI EFFEBI-PRESS Aisi316 System V Profile ¹⁾	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
V 35 S (PR-2B)	Z8	574762	
EFFEBI EFFEBI-PRESS Carbon-S System M Profile ¹⁾	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574738
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
EFFEBI EFFEBI-PRESS Carbon-S System V Profile ¹⁾	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
EFFEBI EFFEBI-PRESS UNICO	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762		
EFFEBI EFFEBI-PRESS UNICO (GAS)	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762		
EFFEBI PRESSTIGE	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
V 42		570165		
V 42 (PR-2B)	Z2	572850		
V 54		570175		
V 54 (PR-2B)	Z2	572851		
V 15 S (PR-2B)	Z8	574752		
V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762		
EFFEBI PRESSTIGE 4E05	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	EFFEBI PRESSTIGE-GAS ⁹⁾	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42		570165		
V 42 (PR-2B)	Z2	572850		
V 54		570175		
V 54 (PR-2B)	Z2	572851		
V 15 S (PR-2B)	Z8	574752		
V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762		
EFFEBI TOF-GAS MULTIPINZA	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	U 16*		570765	
	U 20*		570775	
U 32		570785		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EFFEBI	TH 16*		570460
	TOF		570465
	MULTIPINZA		570470
	TH 20*		570475
MULTIPINZA	TH 26*		570480
	TH 32		570485
	TH 40		572400
	TH 50 (PZ-S)		572405
	TH 63 (PZ-S)		574782
	TH 16 S (PR-2B)	Z8	574788
	TH 20 S (PR-2B)	Z8	574794
	TH 26 S (PR-2B)	Z8	574798
	TH 32 S (PR-2B)	Z8	570717
	F 16*		570720
	F 18*		570727
	F 20*		570730
	F 26*		570735
	F 32		570742
	Fz 40		570747
	Fz 50		572385
	F 63 (PZ-S)		574728
	F 16 S (PR-2B)	Z8	574730
	F 20 S (PR-2B)	Z8	574732
	F 26 S (PR-2B)	Z8	574734
	F 32 S (PR-2B)	Z8	570320
	H 16*		570340
	H 18*		570350
	H 20*		570370
	H 26*		570380
	H 32		570390
	H 40 (PZ-4G)		570765
	U 16*		570770
	U 18*		570775
	U 20*		570780
	U 25*		570750
	C 26*		570785
U 32		570790	
U 40		570795	
U 50		572837	
U 63 (PR-3B)	Z4	572365	
U 63 (PZ-S)		570850	
B 16*		570855	
B 18*		570860	
B 20*		570870	
B 26		570880	
B 32		570765	
EFIELD MULTILAYER PRESS DINGAS	U 16*		570770
	U 18*		570775
	U 20*		570780
	U 25*		570785
	U 32		570765
EFIELD MULTILAYER PRESS WATER	U 16*		570770
	U 18*		570775
	U 20*		570780
	U 25*		570785
	U 32		571770
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS ½" (OD 15,9 mm)		571775
	VUS ¾" (OD 22,2 mm)		571780
	VUS 1" (OD 28,6 mm)		571785
	VUS 1½" (OD 34,9 mm)		571790
	VUS 1¾" (OD 41,3 mm)		571795
	VUS 2" (OD 54,0 mm)		572819
Elkhart APOLLOXPRESS LD-C Fittings Copper	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572820
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572821
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	
ELYDAN izeo	RFz 16*		571325
	RFz 20*		571330
	RFiz 25		571337
	RFiz 32		571342
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EMMETI GERPEX-FIVPRESS	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	H 16*		570320
	H 20*		570350
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
EMPUR	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	TH 14*		570455
	TH 15*		570457
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 25*		570495
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	Esta Rohr simplesta SH M	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 42 (PZ-4G)			570160
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 88.9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
M 108.0 G XL (PR-3S) ⁸⁾		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
M 15 S (PR-2B)		Z8	574738
Esta Rohr simplesta ST M	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PR-3S)		570170
	M 42 (PR-3S)	Z2	572706
M 54 (PR-3S)	Z2	572708	
M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108.0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EUROTUBI EUROPA Inox Pressfitting System M-Profile ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 S (PR-2B)	Z8	574746	
Evans Components Presslok	VAU 15 (1/2")		572687
	VAU 20 (3/4")		572689
	VAU 25 (1")		572691
	ECI 1 1/2"		571932
	ECI 2" (PZ-4G)		571934
	ECI 2 1/2" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106

F

FAR Rubinetterie PRESSFAR	TH 14*		570455	
	TH 16*		570460	
	TH 17*		570462	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	H 14*		570310	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	U 14*		570760	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
F.B.Q. BARONIO BQ PRESS SOLAR	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	F.B.Q. BARONIO BQ PRESS WATER	V 12		570107
		V 15		570115
		V 18		570125
		V 22		570135
V 28			570145	
V 35			570155	
V 42			570165	
V 42 (PR-2B)		Z2	572850	
V 54			570175	
V 54 (PR-2B)		Z2	572851	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
F.B.Q. BARONIO BQ PRESS C-STEEL		V 15		570115
		V 18		570125
		V 22		570135
		V 28		570145
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
F.B.Q. BARONIO BQ PRESS GAS	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	Fercofloor DUO Press FERCO PEX	Rfz 16*	
Rfz 20*			571330
Rfz 25			571335
Rfz 32			571340
TH 16*			570460
TH 20*			570470
TH 25*			570495
TH 32			570480
TH 40			570485
TH 50 (PZ-S)			572400
Fercofloor DUO Press MULTIFER	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	Rfz 16*		571325
	Rfz 20*		571330
	Rfz 25		571335
	Rfz 32		571340
	TH 16*		570460
	TH 20*		570470
FERRO systems BRASELLI GPF GAS	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
FERRO systems BRASELLI GPF MULT Pressfitting MULTICAPA	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
FERRO systems BRASELLI GPF PPSU Pressfitting PEX y MULTICAPA	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
FERRO systems BRASELLI GPF PRESS Pressfitting PEX	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	Rfz 16*		571325
	Rfz 20*		571330
	Rfz 25		571335
Rfz 32		571340	
FILINOX Fitpress	FTB 15		571432
	FTB 18		571434
	FTB 22		571436
	FTB 28		571438
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
FILINOX Instalpress Steel	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
FERRO systems BRASELLI GPF PRESS Pressfitting PEX	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FILINOX Instalpress Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	Fittings Estándar ECO-PRESS	Rfz 16*	
Rfz 20*			571330
Rfz 25			571335
Rfz 32			571340
Fittings Estándar MULTICAPA	Rfz 16*		571325
	Rfz 18*		571327
	Rfz 20*		571330
	Rfz 25		571335
Fittings Estándar PE-X	Rfz 16*		571325
	Rfz 20*		571330
	Rfz 25		571335
	Rfz 32		571340
FORNARA ForPress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
C 26*		570750	
U 32		570785	
FORZA WATER CRIMP (AUS)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625
FORZA STAINLESS WATER CRIMP	K16/P18*		572600
	K/20*		572605
FORZA STESSO PEX WATER AND GAS CRIMP (AUS)	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
FORZA GAS CRIMP (AUS)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
K1/50		572625	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804
VAU 20 S (PR-2B) (OD 19,1 mm)	Z8	574806	
VAU 25 S (PR-2B) (OD 25,4 mm)	Z8	574808	
FORZA STAINLESS V PRESS (AUS)	V 15		570115
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	M 76.1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111
	V 15 S (PR-2B)	Z8	574752
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
FRABO FRABOPRESS 316 GAS M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
FRABO FRABOPRESS 316 GAS V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
FRABO FRABOPRESS 316 M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66.7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579107
	M 76.1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
M 108.0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
FRABO FRABOPRESS 316 V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Driven by REMS Power-Press XL ACC.
- Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- For making press joints for operating pressure \leq PN 10.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
FRABO FRABOPRESS CHROME	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
FRABO FRABOPRESS C-STEEL M	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
FRABO FRABOPRESS C-STEEL V	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	FRABO FRABOPRESS GAS M	V 12		570107
		V 15		570115
		V 18		570125
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 42 (PR-2B)		Z2	572850	
V 54			570175	
V 54 (PR-2B)		Z2	572851	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
FRABO FRABOPRESS GAS V		V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762	
	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
FRABO FRABOPRESS KOMBI	M 35 S (PR-2B)	Z8	574746	
	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
FRABO FRABOPRESS M	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107	
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110		
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111		
M 12 S (PR-2B)	Z8	574736		
M 15 S (PR-2B)	Z8	574738		
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO FRABOPRESS SOLAR	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 15 S (PR-2B)	Z8	574752
FRABO FRABOPRESS V	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	V 12		570107
	V 15		570115
Fränkische alpex-duo XS	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	Fränkische alpex F50 PROFI	F 16*	
F 20*			570727
F 26*			570730
F 32			570735
F 16 S (PR-2B)		Z8	574728
F 20 S (PR-2B)		Z8	574730
F 26 S (PR-2B)		Z8	574732
F 32 S (PR-2B)		Z8	574734
TH 16*			570460
TH 20*			570470
TH 26*			570475
TH 32			570480
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)	Z8	574798	
(DN 26)	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
TH 32		570480	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 25*		570780	
U 32		570785	
VP 16*		570910	
VP 20*		570915	
VP 32		570925	
Fränkische alpex L	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	Fz 75 (PR-3B)	Z4	572830
G			
gabotherm H+S	TH 10*		570467
	TH 12*		570452
	TH 14*		570455
	TH 15*		570457
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
Gallagher USA YogaPipe ACR	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 12* (1/4")		570300
	U 14* (3/8")		570760
U 16* (1/2")		570765	
U 18* (5/8")		570770	
U 20* (3/4")		570775	
U 25* (5/8")		570780	
U 32 (1 1/8")		570785	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Geberit Mapress C-STAHL	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 S (PR-2B)	Z8	574746	
Geberit Mapress Edeltstahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
Geberit Mapress Edeltstahl Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	27 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 45° (P R-2B)	Z8	574746	
Geberit Mapress Kupfer	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 S (PR-2B)	Z8	574746	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Geberit Mapress Kupfer Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
Geberit Mepla	G 16*		570400
	G 20*		570410
	G 26*		570420
	G 32		570430
	G 40		570440
	G 50		570450
	G 63 (PZ-S)		572470
Geberit Mepla Therm	G 16*		570400
	G 20*		570410
Geberit Volex	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
General Fittings 5T00	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 32		570785	
U 40		570790	
U 63 (PZ-S)		572365	
U 63 (PR-3B)	Z4	572837	
General Fittings Ewoprex	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 32		570785	
U 40		570790	
U 63 (PZ-S)		572365	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
General Fittings Serie 5S00	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	General Fittings Trident	B 16*		570850
		F 16*		570717
F 16 S (PR-2B)		Z8	574728	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
U 16*			570765	
U 20*			570775	
U 32		570785		
General Fittings Trident Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
Giacomini Raccordi RM Giacomini	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	U 16*		570765	
	U 20*		570775	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
Giacomini RM MULTIGAS	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	U 16*		570765	
	U 20*		570775	
	U 32		570785	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Giacomini Valvole Giacomini serie R850V	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765
		U 20*		570775
		U 25*		570780
		U 32		570785
U 40			570790	
Grinnell G-PRESS Copper Fittings	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
	VUS ½" (OD 15,9 mm)		571770	
	VUS ¾" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
GS Wärmesysteme System TH	VUS 1¼" (OD 34,9 mm)		571785	
	VUS 1½" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821		
GS Wärmesysteme System V	TH 14*		570455	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798		
HakaGerodur HAKASAN	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	HASTINIK Hastinik/Hitpress	TH 10*		570467
TH 11,6*			570482	
TH 12*			570452	
TH 14*			570455	
TH 16*			570460	
TH 17*			570462	
TH 18*			570465	
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
M 15			570110	
M 18			570120	
M 22			570130	
M 28		570140		
M 35		570150		
M 42 (PZ-4G)		570160		
M 54 (PZ-4G)		570170		
M 42 (PR-3S)	Z2	572706		
M 54 (PR-3S)	Z2	572708		
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110		
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111		
M 15 S (PR-2B)	Z8	574738		
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

H

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
heima24	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	HELIROMA Klimapress	U 16*	
U 18*			570770
U 20*			570775
U 25*			570780
U 32			570785
U 40			570790
U 50			570795
U 63 (PR-3B)		Z4	572837
U 63 (PZ-S)			572365
U 75 (PR-3B)		Z4	572828
HELIROMA Romapress	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Henco	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	HE 32		571900
	HEz 40		571904
	Herotec TEMPUS-PRESS PLUS	H 16*	
H 20*			570350
H 25*			570360
H 32			570380
H 40 (PZ-4G)			570390
RFz 16*			571325
RFz 20*			571330
RFz 25			571335
RFz 32			571340
TH 16*			570460
TH 20*			570470
TH 25*			570495
TH 32			570480
TH 40			570485
TH 50 (PZ-S)			572400
TH 63 (PZ-S)			572405
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
U 25*			570780
U 32			570785
U 40		570790	
U 50		570795	
U 63 (PZ-S)		572365	
U 63 (PR-3B)	Z4	572837	
U 75 (PR-3B)	Z4	572828	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Herotec TEMPUS-PRESS PLUS PPSU	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
U 50		570795	
U 63 (PZ-S)		572365	
U 63 (PR-3B)	Z4	572837	
U 75 (PR-3B)	Z4	572828	
HERZ PIPEFIX	TH 10*		570467
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
HIDRONIX MULTIGAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
HIDRONIX MULTIPIPE	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
U 20*		570775	
C 26*		570750	
U 32		570785	
HIDRONIX UNICO	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
U 20*		570775	
C 26*		570750	
U 32		570785	
HITEC Sistema Multistrato	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Driven by REMS Power-Press XL ACC.
- Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- For making press joints for operating pressure \leq PN 10.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
HITHERM-ISOTUBI NUMEPRESS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	HITHERM HTpress	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
HITHERM HTfire		M 15		570110
		M 18		570120
		M 22		570130
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	HITHERM HTair	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
Hopewell press fit system		M 15		570110
		M 18		570120
		M 22		570130
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	hp praski BAVARIA-press	TH 10*		570467
		TH 12*		570452
		TH 14*		570455
TH 16*			570460	
TH 17*			570462	
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
ICMA Sempiter	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	C 26*		570750	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PR-3B)	Z4	572837	
	U 63 (PZ-S)		572365	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
ICMA Sempigas	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Idrosanitaria Bonomi Homegas	TH 16*		570460
		TH 20*		570470
		TH 26*		570475
TH 16 S (PR-2B)		Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Idrosanitaria Bonomi Idropress	TH 16*		570460
TH 18*			570465	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
IDROSISTEMI Ta-Press	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	IDROSISTEMI Ta-Press	F 16*		570717
F 20*			570727	
F 26*			570730	
F 32			570735	
F 16 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
F 26 S (PR-2B)		Z8	574732	
F 32 S (PR-2B)		Z8	574734	
Fz 40			570742	
Fz 50			570747	
F 63 (PZ-S)			572385	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
H 40 (PZ-4G)			570390	
U 16*			570765	
U 20*			570775	
C 26*			570750	
U 32			570785	
U 40			570790	
U 50			570795	
U 63 (PZ-S)			572365	
IDROTRADE Storm Multipinza		B 16*		570850
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
THL 32		570487		
TH 40		570485		
TH 50 (PZ-S)		572400		
TH 63 (PZ-S)		572405		
TH 16 S (PR-2B)	Z8	574782		
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 20*		570775		
IDROTRADE StormPRES ¹⁾	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
IDROTRADE StormSTEEL ¹⁾	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101	
	M 88.9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110	
	M 108.0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	ILTA INOX/CHIBRO Pressfitting Cuni	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88.9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108.0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)	Z8	574746		
ILTA INOX/CHIBRO Pressfitting inox	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746		
Instantor Press System	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
Instantor Copper Press Metric	M 15		570110	
	M 22		570130	
	M 28		570140	
	M 15 S (PR-2B)	Z8	574738	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
IPA IPANA Press	TH 10*		570467	
	TH 11,6*		570482	
	TH 12*		570452	
	TH 14*		570455	
	TH 15*		570457	
	TH 16*		570460	
	TH 17*		570462	
	TH 18*		570465	
	TH 20*		570470	
	TH 22*		570472	
	TH 25*		570495	
	TH 26*		570475	
	TH 28		570477	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IPA THu IPANA Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	K16/P18*		572600
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	PF 22*		571980
	K16/P18*		572600
	K/20*		572605
	K/25*		572610
IPLEX PIPELINES AUSTRALIA Iplex K2	K32		572615
	K1/40		572620
	K1/50		572625
	K16/P18*		572600
ISOLUTUBEX IPERT	K/20*		572605
	K/25*		572610
	RFz 16*		571325
	RFz 20*		571330
ISOLUTUBEX Multicapa	RFz 25		571337
	RFz 32		571342
	RFz 16*		571325
	RFz 18*		571327
ISOLUTUBEX Multicapa-GAS	RFz 20*		571330
	RFz 25		571337
	RFz 32		571342
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
ISOLUTUBEX Multicapa-PPSU	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	RFz 16*		571325
	RFz 20*		571330
ISOTUBI NUMEPRESS	RFz 25		571337
	RFz 32		571342
	U 16*		570765
	U 20*		570775
IVAR ALPEX-GAS	U 25*		570780
	U 32		570785
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
B 20		570860	
B 26		570870	
B 32		570880	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
IVAR Ivar-Press	B 14*		570845	
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	Fz 40		570742	
	Fz 50		570747	
	F 63 (PZ-S)		572385	
	IVAR MULTI PRESS GAS	TH 16*		570460
		TH 20*		570470
TH 26*			570475	
TH 32			570480	
B 16*			570850	
B 20*			570860	
B 26			570870	
IVAR MULTI PRESS GAS ITALIA	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	U 16*		570765	
IVAR Multi Press MP	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	F 16*		570717	
	F 18*		570720	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	Fz 40		570742	
	Fz 50		570747	
	F 63 (PZ-S)		572385	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	C 26*		570750	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	IVAR Multi Press Leak (MPL)	TH 16*		570460
		TH 20*		570470
		TH 26*		570475
		TH 32		570480
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
F 16*			570717	
F 20*			570727	
F 26*			570730	
F 32			570735	
F 16 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
F 26 S (PR-2B)		Z8	574732	
F 32 S (PR-2B)		Z8	574734	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
U 16*			570765	
U 20*			570775	
C 26*			570750	
U 32			570785	
B 16*			570850	
B 20*		570860		
B 26		570870		
B 32		570880		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
U 20*		570775	
U 25*		570780	
C 26*		570750	
U 32		570785	
B 16*		570850	
B 20*		570860	
B 26		570870	
B 32		570880	
IVAR Plastic Multi Press PMP	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 25*		570780
C 26*		570750	
U 32		570785	
B 16*		570850	
B 20*		570860	
B 26		570870	
B 32		570880	
IVT Edelstahl- Presssystem	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
IVT PRIPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	J		
Jäger - Aquatec Aquatec H	H 14*		570310
	H 16*		570320
	H 17*		570330
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	Jäger - Aquatec C-Stahl - Press Typ M	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76,1 XL (PR-3S)		Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579101
M 88,9 G XL (PR-3S)		Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579110
M 108,0 G XL (PR-3S)		Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579111
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 S (PR-2B)		Z8	574746

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Jäger - Aquatec Edelstahl - Press Typ M	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746		
Jäger - Aquatec Kupfer - Press Typ V	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
Jansen AG JANSEN COMISA	TH 14*		570455	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Jarafflex- Presssystem	TH 14*		570455
		TH 16*		570460
TH 17*			570462	
TH 18*			570465	
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)	Z8	574798		
JUNGWOO JWPress	VUS ½" (OD 15,9 mm)		571770	
	VUS ¾" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 ¼" (OD 34,9 mm)		571785	
	VUS 1 ½" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2 ½" (PR-3B) (OD 66,7 mm)	Z5	572819	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
K				
KAN KAN-therm Press	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	C 26*		570750	
	U 32		570785	
	U 40		570790	
	TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KAN KAN-therm Press LBP	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
KAN KAN-therm Inox	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
M 42 (PR-3S)	Z2	572706	
M 54 (PR-3S)	Z2	572708	
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 12 S (PR-2B)	Z8	574736	
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
KAN KAN-therm Steel	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
M 12 S (PR-2B)	Z8	574736	
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
KAN KAN-therm UltraPRESS	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KE KELIT COPPERFIX Kupfer	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	KE KELIT KELIT KELOX	U 16*	
U 18*			570770
U 20*			570775
U 25*			570780
U 32			570785
U 40			570790
U 50			570795
U 63 (PZ-S)			572365
U 63 (PR-3B)		Z4	572837
U 75 (PR-3B)		Z4	572828
KE KELIT KELOX-PPSU-W	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
KE KELIT KELOX-ULTRAX	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
KE KELIT KELOX-ULTRAX-W	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
KE KELIT KELOX-WINDOWX-U	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
KE KELIT steelFIX C-Stahl	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	KE KELIT steelFIX Edelstahl	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 S (PR-2B)		Z8	574746
KEMBLA KemPress (AUS)		VAU 15 (OD 12,7 mm)	
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KISAN Kisan KD	KI 16*		571360
	KI 20*		571370
	KI 25*		571375
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
KISAN Kisan WL	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	KI 16*		571360
	KI 20*		571370
KISAN Kisan WM	KI 25*		571375
	KI 32		571380
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
KISAN Kisan WR	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	KI 16*		571360
	KI 20*		571370
	KI 25*		571375
KISAN Kisan WR	KI 32		571380
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 75 (PR-3B)		572828
	TH 20*		570470
	TH 25*		570495
KISAN Kistal C	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
KISAN Kistal C	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	KISAN Kistal Inox	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
L			
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
LK Systems LK >B-Press	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
LK Systems LK >B-Press Eltörzinkat	V 35		570155
	V 42		570165
	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	LK Systems LK >B-Press Eltörzinkat	V 12	
V 15			570115
V 18			570125
V 22			570135
V 28			570145
V 35			570155
V 42			570165
LK Systems LK >B-Press Eltörzinkat	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
LK Systems	V 15		570115
LK >B-Press	V 18		570125
Gas	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
LK Systems	TH 16*		570460
LK Universal	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
LVI-DAHL	U 16*		570765
Altech-Alupex	U 20*		570775
	U 25*		570780
	U 32		570785
M			
MAINCOR	U 16*		570765
MAINPRESS	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
MAINCOR	U 16*		570765
MAINFLOR	U 20*		570775
Mair Heiztechnik	H 11,5*		570315
M-Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
Ma.s.ter System	TH 14*		570455
PRESSMASTER	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-46)		570390
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Meier Tobler	H 16*		570320
Metalplast - Stramax	H 20*		570350
Serie MM	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
METALGRUP	U 16*		570765
Permatubo	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
METALGRUP	RFz 16*		571325
PexGrup	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
METALGRUP	U 16*		570765
MultiGrup	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
Mueller Industries	VUS ½" (OD 15,9 mm)		571770
Streamline PRS	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
MULTITHERM	TH 16*		570460
PRESSSYSTEM	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
Multicapas Industrial	RFz 16*		571325
AIS PEX	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC.
- 4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- 7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- 8) For making press joints for operating pressure ≤ PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Multicap Industrial AIS XPRT	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
	Multicap Industrial multitubo systems MC	U 16*		570765
		U 18*		570770
U 20*			570775	
U 25*			570780	
U 32			570785	
U 40			570790	
U 50			570795	
U 63 (PZ-S)			572365	
U 63 (PR-3B)		Z4	572837	
U 75 (PR-3B)		Z4	572828	
Multicap Industrial multitubo systems MM	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	

N

NEUTHERM MEKUPRESS-HT	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 40		570790
NIBCO (USA) Press System Copper	VUS 1/2" (OD 15,9 mm)		571770
	VUS 3/4" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1 1/4" (OD 34,9 mm)		571785
	VUS 1 1/2" (OD 41,3 mm)		571790
NICOLL FLUXO	VUS 2" (OD 54,0 mm)		571795
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
NUPI Industrie Italiana Multinupi	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 14*		570760
	U 16*		570765
	U 18*		570770
U 20*		570775	
U 25*		570780	
C 26*		570750	
U 32		570785	
U 40		570790	
U 50		570795	
U 63 (PR-3B)	Z4	572837	
U 63 (PZ-S)		572365	
Nussbaum Optifitt-Press	VMP 3/8" (OD 17,2 mm)		571740
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
Nussbaum Optiflex-Flowpress	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
	VRX 16		571750
Nussbaum Optipress	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
	VRX 63		571797
	V 15		570115
Nussbaum Optipress-Gaz	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B)	Z5	572815
	Vfz 76,1 (PR-3B)	Z5	572816
	Vfz 88,9 (PR-3B)	Z5	572817
	Vfz 108,0 (PR-3B)	Z5	572818
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
Nussbaum Optipress-Therm	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
V 42		570165	
Nussbaum Optipress-Therm	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B)	Z5	572815
	Vfz 76,1 (PR-3B)	Z5	572816
	Vfz 88,9 (PR-3B)	Z5	572817
	Vfz 108,0 (PR-3B)	Z5	572818
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
O			
Oventrop Cofit P	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
	H 32 A		570680
	H 40 A		570690
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Oventrop Cofit PD	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
Oventrop Cofit PDK	H 16 A*		570620
	H 20 A*		570650
Oventrop Cofit PD-HT	H 16 A*		570620
	H 20 A*		570650
	H 25 A*		570660
	H 32 A		570680
Oventrop Cofit PDK-HT	H 16 A*		570620
	H 20 A*		570650
P			
PBTab SERTIPRESS	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
PBTab SERTI-STEEL	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	Pegler Yorkshire XPress Carbon	M 12	
M 15			570110
M 18 ¹⁾			570120
M 22			570130
M 28 ¹⁾			570140
M 35			570150
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 12 S (PR-2B)		Z8	574736
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 S (PR-2B)		Z8	574746
Pegler Yorkshire XPress Copper		M 12	
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Pegler Yorkshire XPress Copper Gas	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
Pegler Yorkshire XPress Stainless	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
PERFEXIM PERFEKT SYSTEM	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	PERFILTUBO PERFILALUPEX	U 16*		570765
		U 18*		570770
		U 20*		570775
		U 25*		570780
		U 32		570785
		U 40		570790
U 50			570795	
U 63 (PR-3B)		Z4	572837	
U 63 (PZ-S)			572365	
U 75 (PR-3B)		Z4	572828	
PERFILTUBO PERFILPRESS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
PEXTUBE PexTube	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571337	
	RFz 32		571342	
	Pipelife C-PRESS	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
		M 42 (PR-3S)	Z2	572706
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Pipelife RADOPRESS	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	Pipetec Connect	TH 16*	
TH 20*			570470
TH 26*			570475
TH 32			570480
TH 40			570485
TH 50 (PZ-S)			572400
TH 63 (PZ-S)			572405
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
U 25*		570780	
U 32		570785	
PLASTICA ALFA Multypex	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
PLASTICA ALFA Multypex Air	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
PLASTICA ALFA Multypexalfa Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
PLASTICA ALFA Multypexalfa Gas protek	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
PLASTICA ALFA Multypex Plus	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
PLASTICA ALFA Multypex Thermo	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
PLASTICA ALFA Multypex Thermo Plus	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
PLÁSTICOS FERRO	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
FERROPLAST GPF MULT Pressfitting MULTICAPA	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
FERROPLAST GPF PPSU Pressfitting PEX y MULTICAPA	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
PLÁSTICOS FERRO FERROPLAST GPF PRESS Pressfitting PEX	Rfz 16*		571325
	Rfz 20*		571330
	Rfz 25		571335
	Rfz 32		571340
PLUMBING PLUS EZIPEX Crimp (AUS)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
PLUMBING PLUS EZIPEX Gas (AUS)	K16/P18*		572600	
	K/20*		572605	
	K/25*		572610	
	K32		572615	
	K1/40		572620	
	K1/50		572625	
	PLUMBING PLUS EZIPRESS Gas (AUS)	VAU 15 (OD 12,7 mm)		572687
		VAU 20 (OD 19,1 mm)		572689
		VAU 25 (OD 25,4 mm)		572691
		VAU 32 (OD 31,8 mm)		572693
VAU 40 (OD 38,1 mm)			572695	
VAU 50 (OD 50,8 mm)			572697	
VAUFz 65 (PR-3B) (OD 63,5 mm)		Z5	572839	
VAUFz 80 (PR-3B) (OD 76,2 mm)		Z5	572840	
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	572841	
	VAU 20 S (PR-2B) (OD 19,1 mm)	Z8	574804	
	VAU 25 S (PR-2B) (OD 25,4 mm)	Z8	574806	
	VAU 32 (OD 31,8 mm)		574808	
	VAU 40 (OD 38,1 mm)		572687	
	VAU 50 (OD 50,8 mm)		572689	
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572691	
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572693	
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	572695	
	VAU 20 S (PR-2B) (OD 19,1 mm)	Z8	572697	
	VAU 25 S (PR-2B) (OD 25,4 mm)	Z8	572699	
	VAU 32 (OD 31,8 mm)		572839	
	VAU 40 (OD 38,1 mm)		572840	
	VAU 50 (OD 50,8 mm)		572841	
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	574804	
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	574806	
POLYPIPE POLYSURE	TH 10*		570467	
	TH 15*		570457	
	TH 22*		570472	
	TH 28		570477	
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
POLYSAN- C-Stahl-Press- System M	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
POLYSAN Edelstahl Press-System 1.4520	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S) ¹⁾	Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S) ¹⁾	Z7 XL 45 kN ⁴⁾	579111	
POLYSAN Edelstahl Press-System Gas	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
POLYSAN- Edelstahl Press-System Wasser	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
POLYSAN	TH 14*		570455
Handelsges.	TH 16*		570460
m.b.H. & Co KG	TH 17*		570462
(Krems/Öster- reich)	TH 18*		570465
	TH 20*		570470
POLYSAN- Press-System	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
POLYSAN	TH 14*		570455
Handelsges.	TH 16*		570460
m.b.H. & Co KG	TH 17*		570462
(Krems/Öster- reich)	TH 18*		570465
	TH 20*		570470
POLYSAN-Henco- Press-System	TH 26*		570475
	HE 32		571900
	HEz 40		571904
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
POLYSAN (España)	U 16*		570765
.Rainbow*	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Prandelli	H 14*		570310
Multyrama Pf	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
Prandelli	H 16*		570320
Multyrama Pfm	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
PURMO	F 16*		570717
Cleverfit Radial	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 25		570920

R

Raccorderie Metalliche aesPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
Raccorderie Metalliche inoxPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
Raccorderie Metalliche MARINEPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Raccorderie Metalliche steelPRES ¹	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S) ⁽¹⁾	Z7 XL 45 kN ⁽¹⁾	579101	
	M 88,9 G XL (PR-3S) ⁽¹⁾	Z7 XL 45 kN ⁽¹⁾	579110	
	M 108,0 G XL (PR-3S) ⁽¹⁾	Z7 XL 45 kN ⁽¹⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	RBM Tita-fix	B 14*		570845
		B 16*		570850
		B 18*		570855
		B 20*		570860
		B 26		570870
F 16*			570717	
F 18*			570720	
F 20*			570727	
F 16 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
H 14*			570310	
H 16*			570320	
H 18*			570340	
H 20*			570350	
H 26*			570370	
H 32			570380	
TH 14*			570455	
TH 16*			570460	
TH 18*			570465	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
U 14*			570760	
U 16*			570765	
U 18*			570770	
U 20*		570775		
RBM Tita-gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
Redi Nicoll Fluxo	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)		572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
Redi Nicoll Fluxo Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 14*		570760	
U 16*		570765		
U 18*		570770		
U 20*		570775		
U 25*		570780		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PZ-S)		572365		
U 63 (PR-3B)	Z4	572837		
U 75 (PR-3B)	Z4	572828		
RIFENG TH PRESS FITTING (F9)	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405		
RIQUIER A SERTIR	Rfz 12*		571320	
	Rfz 16*		571325	
	Rfz 20*		571330	
	Rfz 25		571335	
	RN 14*		572672	
RN 16		572670		
RN 17*		572674		
RN 20*		572676		
RN 25/26		572678		
RN 32		572680		
RN 40 (PR-3S)	Z2	572714		
RN 50 (PR-3S)	Z2	572716		
RNz 63 (PR-3B)	Z4	572836		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
RUBINETTERIE Bresciane Bonomi TURBO CuNi	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	RUBINETTERIE Bresciane Bonomi TURBO INOX	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
RUBINETTERIE Bresciane Bonomi TURBO INOX GAS		M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	RUBINETTERIE Bresciane Bonomi TURBO STEEL	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ⁽²⁾ / Z7 XL 45 kN ⁽¹⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
RUBINETTERIE Bresciane Bonomi TURBO PRESS		B 14*		570845
		B 16*		570850
		B 18*		570855
		B 20*		570860
		B 26		570870
	B 32		570880	
	H 14*		570310	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405		
TH 16 S (PR-2B)	Z8	574782		
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 14*		570760		
U 16*		570765		
U 18*		570770		
U 20*		570775		
C 26*		570750		
U 32		570785		
RUBINETTERIE Bresciane Bonomi TURBO PRESS GAS	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
S				
Sa.MI plastic	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Sa.MI plastic Multistrato Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	28	574782	
	TH 20 S (PR-2B)	28	574788	
	TH 26 S (PR-2B)	28	574794	
	TH 32 S (PR-2B)	28	574798	
	SANHA 3fit-Press Pb-free Serie 25000	B 16*		570850
		B 20*		570860
B 26			570870	
B 32			570880	
F 16*			570717	
F 20*			570727	
F 26*			570730	
F 32			570735	
Fz 40			570742	
Fz 50			570747	
F 63 (PZ-S)			572385	
F 16 S (PR-2B)		28	574728	
F 20 S (PR-2B)		28	574730	
F 26 S (PR-2B)		28	574732	
F 32 S (PR-2B)		28	574734	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
H 40 (PZ-4G)			570390	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		28	574782	
TH 20 S (PR-2B)		28	574788	
TH 26 S (PR-2B)		28	574794	
TH 32 S (PR-2B)		28	574798	
U 16*			570765	
U 20*			570775	
C 26*			570750	
U 32			570785	
U 40			570790	
U 50			570795	
U 63 (PR-3B)		24	572837	
U 63 (PZ-S)			572365	
SANHA 3fit-Press PPSU Serie 35000		B 16*		570850
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	28	574728	
	F 20 S (PR-2B)	28	574730	
	F 26 S (PR-2B)	28	574732	
	F 32 S (PR-2B)	28	574734	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	28	574782	
	TH 20 S (PR-2B)	28	574788	
	TH 26 S (PR-2B)	28	574794	
	TH 32 S (PR-2B)	28	574798	
	U 16*		570765	
	U 20*		570775	
	C 26*		570750	
	U 32		570785	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA Heavy Steel Press	VMP ½" (OD 21,3 mm)		571762
	VMPz ¾" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844
SANHA Heavy Steel Press Gas ¹⁾	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¾" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413
SANHA-NiroSan Gas Presssystem Serie 17000	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845
	SA 15		570935
	SA 18		570940
	SA 22		570945
SANHA-NiroSan Industry Presssystem Serie 18000	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	22	572706
	M 54 (PR-3S)	22	572708
	XP 64,0 XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579100
	M 76,1 XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	28	574738
	M 18 S (PR-2B)	28	574740
	M 22 S (PR-2B)	28	574742
	M 28 S (PR-2B)	28	574744
	M 35 S (PR-2B)	28	574746
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	22	572850
	V 54		570175
	V 54 (PR-2B)	22	572851
	V 15 S (PR-2B)	28	574752
	V 18 S (PR-2B)	28	574756
	V 22 S (PR-2B)	28	574758
	V 28 S (PR-2B)	28	574760
	V 35 S (PR-2B)	28	574762

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA-NiroSan-Presssystem Serie 9000	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935
		SA 18		570940
		SA 22		570945
SA 28			570950	
SA 35			570955	
M 15			570110	
M 18			570120	
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 42 (PR-2B)		Z2	572850	
V 54			570175	
V 54 (PR-2B)		Z2	572851	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
SANHA NiroTherm Serie 91000		SA 15		570935
		SA 18		570940
		SA 22		570945
		SA 28		570950
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA NiroTherm Industry Serie 98000	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SANHA-Press Chrom Serie 16000	SA 12		570930
		SA 15		570935
		SA 18		570940
		SA 22		570945
SA 28			570950	
M 12			570100	
M 15			570110	
M 18			570120	
M 22			570130	
M 28			570140	
M 12 S (PR-2B)		Z8	574736	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
V 12			570107	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000		SA 12		570930
		SA 14		570932
		SA 15		570935
		SA 16		570937
		SA 18		570940
		SA 22		570945
		SA 28		570950
		SA 35		570955
		M 12		570100
		M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 12		570107	
	V 14		570112	
	VG 14		570132	
	V 15		570115	
	V 16		570117	
	VG 16		570137	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	VG 14 S (PR-2B)	Z8	574750	
V 15 S (PR-2B)	Z8	574752		
VG 16 S (PR-2B)	Z8	574754		
V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press Pressfittings Serie 6000	SA 12		570930	SANHA PURAPRESS Serie 8000	SA 12		570930
	SA 14		570932		SA 14		570932
	SA 15		570935		SA 15		570935
	SA 16		570937		SA 16		570937
	SA 18		570940		SA 18		570940
	SA 22		570945		SA 22		570945
	SA 28		570950		SA 28		570950
	SA 35		570955		SA 35		570955
	M 12		570100		M 12		570100
	M 15		570110		M 15 ¹⁾		570110
	M 18		570120		M 18 ¹⁾		570120
	M 22		570130		M 22 ¹⁾		570130
	M 28		570140		M 28 ¹⁾		570140
	M 35		570150		M 35 ¹⁾		570150
	M 42 (PR-3S)		572706		M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708		M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579100		XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736		M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738		M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740		M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742		M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744		M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746		M 35 S (PR-2B)	Z8	574746
	V 12		570107		V 12		570107
	V 14		570112		V 14		570112
	VG 14		570132		VG 14		570132
	V 15		570115		V 15		570115
	V 16		570117		V 16		570117
	VG 16		570137		VG 16		570137
	V 18		570125		V 18		570125
	V 22		570135		V 22		570135
	V 28		570145		V 28		570145
	V 35		570155		V 35		570155
	V 42		570165		V 42		570165
	V 42 (PR-2B)	Z2	572850		V 42 (PR-2B)	Z2	572850
	V 54		570175		V 54		570175
	V 54 (PR-2B)	Z2	572851		V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748		V 12 S (PR-2B)	Z8	574748
VG 14 S (PR-2B)	Z8	574750	VG 14 S (PR-2B)	Z8	574750		
V 15 S (PR-2B)	Z8	574752	V 15 S (PR-2B)	Z8	574752		
VG 16 S (PR-2B)	Z8	574754	VG 16 S (PR-2B)	Z8	574754		
V 18 S (PR-2B)	Z8	574756	V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758	V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760	V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762	V 35 S (PR-2B)	Z8	574762		
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	SANHA-Therm Serie 24000	SA 12		570930
	SA 15		570935		SA 15		570935
	SA 18		570940		SA 18		570940
	SA 22		570945		SA 22		570945
	SA 28		570950		SA 28		570950
	SA 35		570955		SA 35		570955
	M 12		570100		M 12		570100
	M 15		570110		M 15		570110
	M 18		570120		M 18		570120
	M 22		570130		M 22		570130
	M 28		570140		M 28		570140
	M 35		570150		M 35		570150
	M 42 (PR-3S)	Z2	572706		M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708		M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579100		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111		M 12 S (PR-2B)	Z8	574736
	M 12 S (PR-2B)	Z8	574736		M 15 S (PR-2B)	Z8	574738
	M 15 S (PR-2B)	Z8	574738		M 18 S (PR-2B)	Z8	574740
	M 18 S (PR-2B)	Z8	574740		M 22 S (PR-2B)	Z8	574742
	M 22 S (PR-2B)	Z8	574742		M 28 S (PR-2B)	Z8	574744
	M 28 S (PR-2B)	Z8	574744		M 35 S (PR-2B)	Z8	574746
	M 35 S (PR-2B)	Z8	574746		V 12		570107
	V 12		570107		V 15		570115
	V 15		570115		V 18		570125
	V 18		570125		V 22		570135
	V 22		570135		V 28		570145
	V 28		570145		V 35		570155
	V 35		570155		V 42		570165
	V 42		570165		V 42 (PR-2B)	Z2	572850
	V 42 (PR-2B)	Z2	572850		V 54		570175
	V 54		570175		V 54 (PR-2B)	Z2	572851
	V 54 (PR-2B)	Z2	572851		V 12 S (PR-2B)	Z8	574748
	V 12 S (PR-2B)	Z8	574748		V 15 S (PR-2B)	Z8	574752
	V 15 S (PR-2B)	Z8	574752		V 18 S (PR-2B)	Z8	574756
	V 18 S (PR-2B)	Z8	574756		V 22 S (PR-2B)	Z8	574758
	V 22 S (PR-2B)	Z8	574758		V 28 S (PR-2B)	Z8	574760
	V 28 S (PR-2B)	Z8	574760		V 35 S (PR-2B)	Z8	574762
	V 35 S (PR-2B)	Z8	574762				

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA-Therm Industry Serie 28000	SA 12		570930	
	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SANITOP PERMATUBO INOX	M 15		570110
		M 18 ¹⁾		570120
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 35 (PR-3S)	Z2	572727	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
SANPRO THPRESS	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
SATEC SK VITerm	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
SAVEUR REFLEX PEX Water	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
SAVEUR REFLEX PEX-AL-PEX Gas	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
Schütz duo-flex tri-o-flex	TH 14*		570455	
	TH 16*		570460	
	TH 17*		570462	
	TH 20*		570470	
	TH 25*		570495	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Schwer Fittings AQUApress	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	Seppelfricke	V 12		570107
	VSH SudoPress	V 15		570115
	C-Stahl	V 18		570125
	Visu-Control	V 22		570135
		V 28		570145
		V 35		570155
		V 42		570165
V 54			570175	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
Seppelfricke		V 12		570107
VSH SudoPress		V 15		570115
Edelstahl		V 18		570125
Visu-Control		V 22		570135
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	Seppelfricke	V 12		570107
	VSH SudoPress	V 15		570115
	Kupfer	V 18		570125
	Visu-Control	V 22		570135
V 28			570145	
V 35			570155	
V 42			570165	
V 54			570175	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
Seppelfricke		V 15		570115
VSH SudoPress		V 18		570125
Kupfer Solar		V 22		570135
Visu-Control		V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
Seppelfricke	M 12		570100	
VSH XPress	M 15		570110	
C-Stahl	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Seppelfricke VSH XPress Edelstahl	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 S (PR-2B)	Z8	574746	
Seppelfricke VSH XPress Edelstahl Gas	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
Seppelfricke VSH XPress Kupfer	M 12		570100
	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
Seppelfricke VSH XPress Kupfer Gas	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
M 54 (PR-3S)	Z2	572708	
SESTA SESTA GAS	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
SESTA Sistema multistrato	H 16*		570320
	H 20*		570350
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
SIGMA LI Premium	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SLOVARM PEX-THERM	U 16*		570765	
	U 20*		570775	
	H 26*		570370	
	U 32		570785	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	STANDARD HIDRAULICA MultiStandard	H 16*		570320
		H 20*		570350
		H 25*		570360
H 32			570380	
RFz 16*			571325	
RFz 20*			571330	
RFz 25			571335	
RFz 32			571340	
TH 16*			570460	
TH 20*			570470	
TH 25*			570495	
TH 32		570480		
TH 16 S (PR-2B)	Z8	574782		
TH 20 S (PR-2B)	Z8	574788		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 18*		570770		
U 20*		570775		
U 25*		570780		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	
	M 18 ⁹⁾		570120	
	M 22		570130	
	M 28 ⁹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
STELBI Polikraft	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 20*		570775		
STELBI Stelgas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
STH Westco COPPER PRESS	M 15		570110
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

T

TDM BRASS Serie 1600	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	U 16*		570765
	U 18*		570770
U 20*		570775	
U 25*		570780	
C 26*		570750	
U 32		570785	

TDM BRASS Serie 2600	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	THL 32		570487
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	U 16*		570765
	U 18*		570770
	U 20*		570775
U 25*		570780	
C 26*		570750	
U 32		570785	

TDM BRASS Serie 1700 gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
	TH 16 S (PR-2B)	Z8	574782
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	

TermoConcept TC-PRESS	Basic E01 ⁵⁾		571855
--------------------------	-------------------------	--	--------

THERMOLUTZ	H 14*		570310
	H 16*		570320
	TH 20*		570470
	TH 20 S (PR-2B)	Z8	574788

TE-SA TE-SA press serie 800	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798

THERMACOME ACOPEX ALU	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
U 32		570785	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
TIEMME AL-COBRAPEX Serie 1650	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	

TIEMME Serie 1700 PE-X a pressare	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340

TIEMME TIEMME Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	

TIGRE ALPEX GÁS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480

TKM Systemtechnik	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

TRA MULTITRAPRESS	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

TRA TRAPRESS	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340

Tradelink TradePex Crimp Water	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
K1/50		572625	

Tradelink TradePex Crimp Gas	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625

TUBIPLAST ITALY MULTILAYER PIPE	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 18*		570340

	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TWEETOP	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
U 75 (PR-3B)	Z4	572828	
U			
UNICAL AG MAX-MULTIPEX	U 16*		570765
	U 20*		570775
	H 26*		570370
	C 26*		570750
	U 32		570785
UNIDELTA DELTAPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
U 20*		570775	
U 32		570785	
U 40		570790	
U 50		570795	
U 63 (PZ-S)		572365	
UNIDELTA DELTAPRESS GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
U 20*		570775	
U 32		570785	
Uponor MLC	UP 14*		572630
	UP 16*		572632
	UP 18*		572634
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Uponor MLC-D	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Uponor MLC-G ³⁾	UP 20 ²⁾		572636
	UP 25		572638
	UP 32		572640
Uponor S-Press PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
Uponor Uni Pipe PLUS	UP 32		572640
	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	V		
Valsir Bravopress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
U 16*		570765	
U 20*		570775	
C 26*		570750	
U 32		570785	
Valsir PEXAL	H 14*		570310
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
U 16*		570765	
U 20*		570775	
C 26*		570750	
U 32		570785	
U 40		570790	
U 50		570795	
U 63 (PR-3B)	Z4	572837	
U 63 (PZ-S)		572365	
U 75 (PR-3B)	Z4	572828	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Van Marcke NV Tubipex	TH 16*		570460	
	TH 17*		570462	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Van Marcke NV Tubipress	M 12		570100
		M 15		570110
M 18			570120	
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PZ-4G)			570160	
M 54 (PZ-4G)			570170	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 12 S (PR-2B)		Z8	574736	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
Variotherm System TH	TH 11,6*		570482	
	TH 16*		570460	
	TH 20*		570470	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
VESBO CARBON	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
VESBO INOX	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
VESBO MULTIPRESS TH-U	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	C 26*		570750	
	U 32		570785	
VESBO VPREMIUM	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
U 63 (PZ-S)		572365		
Viega Fonterra	VX 12*		571630	
	VP 14/15*		570905	
	VP 16/17*		570910	
	VP 20*		570915	
	VP 25 ²⁾		570920	
			570920	
Viega MegaPress (ASTM) ¹⁰⁾	VMP 3/8" (OD 17,2 mm)		571760	
	VMP 1/2" (OD 21,3 mm)		571762	
	VMPz 3/4" (OD 26,9 mm)		571764	
	VMPz 1" (OD 33,7 mm)		571767	
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413	
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844	
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845	
			572845	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega MegaPress 304 FKM (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress 316 (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress 316 FKM (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress CuNi (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress FKM (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress (EN) ⁹⁾	VMP 3/8" (OD 17,2 mm)		571760
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845	
Viega Megapress S (EN) ⁹⁾	VMP 3/8" (OD 17,2 mm)		571760
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845	
Viega Megapress S XL (EN) ⁹⁾	VMPz 2 1/2" XL (PR-3B) EN (OD 76,1 mm)	Z7 XL 45 kN ⁴⁾	579112
	VMPz 3" XL (PR-3B) (OD 88,9 mm)	Z7 XL 45 kN ⁴⁾	579113
	VMPz 4" XL (PR-3B) (OD 114,3 mm)	Z7 XL 45 kN ⁴⁾	579114
Viega Pexfit	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Pexfit Fosta G	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Prestabo	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁴⁾	Z5	572815
	Vfz 76,1 (PR-3B) ⁴⁾	Z5	572816
	Vfz 88,9 (PR-3B) ⁴⁾	Z5	572817
	Vfz 108,0 (PR-3B) ⁴⁾	Z5	572818
	V 12 S (PR-2B)	Z8	574748
V 15 S (PR-2B)	Z8	574752	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Viega Profifress	V 12		570107
	VG 14		570132
	V 15		570115
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁴⁾	Z5	572815
	Vfz 66,7 (PR-3B)	Z5	572846
	Vfz 76,1 (PR-3B) ⁴⁾	Z5	572816
Vfz 88,9 (PR-3B) ⁴⁾	Z5	572817	
Vfz 108,0 (PR-3B) ⁴⁾	Z5	572818	
V 12 S (PR-2B)	Z8	574748	
VG 14 S (PR-2B)	Z8	574750	
V 15 S (PR-2B)	Z8	574752	
VG 16 S (PR-2B)	Z8	574754	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Viega Profipress G	V 12		570107	
	V 14		570132	
	V 15		570115	
	V 16		570137	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815	
	V 12 S (PR-2B)	Z8	574748	
	V 14 S (PR-2B)	Z8	574750	
	V 15 S (PR-2B)	Z8	574752	
	V 16 S (PR-2B)	Z8	574754	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	Viega Profipress S	V 12		570107
		V 15		570115
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
Viega Profipress Therm		V 12		570107
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
Viega ProPress (ASTM) ⁽¹⁰⁾	VUS 1/2" (OD 15,9 mm)		571770	
	VUS 3/4" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 1/4" (OD 34,9 mm)		571785	
	VUS 1 1/2" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819	
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
	Viega ProPress 304 FKM (ASTM) ⁽¹⁰⁾	VUS 1/2" (OD 15,9 mm)		571770
VUS 3/4" (OD 22,2 mm)			571775	
VUS 1" (OD 28,6 mm)			571780	
VUS 1 1/4" (OD 34,9 mm)			571785	
VUS 1 1/2" (OD 41,3 mm)			571790	
VUS 2" (OD 54,0 mm)			571795	
VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)		Z5	572819	
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
	Viega ProPress 316 (ASTM) ⁽¹⁰⁾	VUS 1/2" (OD 15,9 mm)		571770
VUS 3/4" (OD 22,2 mm)			571775	
VUS 1" (OD 28,6 mm)			571780	
VUS 1 1/4" (OD 34,9 mm)			571785	
VUS 1 1/2" (OD 41,3 mm)			571790	
VUS 2" (OD 54,0 mm)			571795	
VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)		Z5	572819	
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
	Viega Propress WATER System AUS	VAU 15 (OD 12,7 mm)		572687
VAU 20 (OD 19,1 mm)			572689	
VAU 25 (OD 25,4 mm)			572691	
VAU 32 (OD 31,8 mm)			572693	
VAU 40 (OD 38,1 mm)			572695	
VAU 50 (OD 50,8 mm)			572697	
Viega PropressG GAS System AUS		VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689	
	VAU 25 (OD 25,4 mm)		572691	
	VAU 32 (OD 31,8 mm)		572693	
	VAU 40 (OD 38,1 mm)		572695	
	VAU 50 (OD 50,8 mm)		572697	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Raxinox	VRX 16		571750
	VRX 20		571752
Viega Raxofix	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
	VRX 63		571797
Viega Sanfix ⁽²⁾	VP 16/17 ⁽²⁾		570910
	VP 20 ⁽²⁾		570915
	VP 25 ⁽²⁾		570920
	VP 32		570925
	VP 40 (PZ-4G)		570970
	VPz 50 (PZ-S)		572350
Viega Sanfix Fosta ⁽²⁾	VP 16/17 ⁽²⁾		570910
	VP 20 ⁽²⁾		570915
	VP 25 ⁽²⁾		570920
	VP 32		570925
	VP 40 (PZ-4G)		570970
	VPz 50 (PZ-S)		572350
Viega Sanpress	VPz 63 (PZ-S)		572355
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VR 76,1 (PR-3B) ⁽⁴⁾	Z5	572822
	VR 88,9 (PR-3B) ⁽⁴⁾	Z5	572823
	VR 108,0 (PR-3B) ⁽⁴⁾	Z5	572824
	V 12 S (PR-2B)	Z8	574748
V 15 S (PR-2B)	Z8	574752	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Viega Sanpress Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Viega Sanpress Inox G	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Viega Smartpress	VX 16*		571635
	VX 20*		571640
	VX 25*		571645

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viessmann	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Vogel & Noot EASYTEC	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
VSH MultiPress	U 14*		570760
	U 16*		570765
VSH MultiPress Gas ²⁾	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	U 16 ²⁾		570765
	U 20 ²⁾		570775
	U 25 ²⁾		570780
	TH 16 ²⁾		570460
	TH 20 ²⁾		570470
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
VSH SudoPress Carbon	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
V 35 S (PR-2B)	Z8	574762	
VSH SudoPress Copper	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 14 S (PR-2B)	Z8	574800
	V 15 S (PR-2B)	Z8	574752
	V 16 S (PR-2B)	Z8	574802
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
VSH SudoPress Copper Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15		570115
	V 18		570125
VSH SudoPress Stainless	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
VSH XPress Carbon	M 12		570100	
	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PZ-46)		570160	
	M 54 (PZ-46)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 12 S (PR-2B)	Z8	574736	
M 15 S (PR-2B)	Z8	574738		
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
VSH XPress Copper	M 12		570100	
	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
VSH XPress Copper GAS	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	VSH XPress Stainless	M 15		570110
		M 18 ¹⁾		570120
		M 22		570130
M 28 ¹⁾			570140	
M 35			570150	
M 42 (PZ-46)			570160	
M 54 (PZ-46)			570170	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
VSH XPress Stainless Gas	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	W			
	Watts MTR Art press	TH 16*		570460
		TH 20*		570470
TH 26*			570475	
TH 32			570480	
WATTS RADIANT Watts WaterPEX	US ¾**		571450	
	US ½**		571455	
	US ¾**		571460	
	US 1**		571465	
	US 1 ¼"		571470	
	US 1 ½"		571475	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WATTS	US ¾"		571450
RADIANT	US ½"		571455
Watts	US ¾"		571460
RadiantPEX	US 1"		571465
	US 1 ¼"		571470
	US 1 ½"		571475
WATTS	U 16 (½")		570765
RADIANT	U 20 (¾")		570775
Watts	U 25 (¾")		570780
RadiantPEX-AL	U 32 (1")		570785
Wavin	U 50		570795
Tigris K1/M1	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
Wavin	B 16*		570850
Tigris K5/M5	B 20*		570860
	B 32		570880
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
WEECON	M 15		570110
PRESS-C-Stahl	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
WEECON	M 15		570110
PRESS-Edelstahl	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WEECON	V 15		570115
PRESSS-Kupfer	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
WEM	U 16*		570765
WIELAND	TH 14 ²⁾		570455
cuprotherm	TH 16 ²⁾		570460
CTX ²⁾	TH 18 ²⁾		570465
	TH 20 ²⁾		570470
	TH 26 ²⁾		570475
WKS-Press	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
WÜRTH	TH 16*		570460
Würth	TH 20*		570470
	TH 26*		570475
	HE 32		571900
	HEz 40		571904
X			
XtraConnect	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
(DN 26)	U 25*		570780
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 32		570925
Z			
ZEWO THERM	TH 12*		570452
Zewo Press Premium	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
ZEWO THERM	TH 16*		570460
Zewo Press PPSU	TH 20*		570470
	TH 26*		570475
	TH 32		570480
ZURN	US ¾"		571450
INDUSTRIES	US ½"		571455
ZURN PEX	US ¾"		571460
	US 1"		571465
	US 1 ¼"		571470
	US 1 ½"		571475
	US 2"		571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

Description	Art.-No.
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40 A, VUS 1½", VUS 2")	570290
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/VUSFz 2½–4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-S) and 2 pressing rings VMPz 1½–2" (PR-3B)	572809
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813



Confirmation of suitability

The suitability of crimping tools is determined basically by the manufacturer of crimping tools. Moreover the suitability of REMS crimping tools has been confirmed by the system manufacturer/supplier himself or approved through independent testing institutes.

Confirmation of suitability through the system manufacturer/supplier

More than 90 % of the manufacturers/suppliers of the pressfitting systems listed herein have tested REMS pressing tongs and confirmed the suitability for their pressfitting system.

Confirmation of suitability through independent testing institutes

The suitability of REMS pressing tongs for additional pressfitting systems have been confirmed through independent technical institutes:

TÜV-Certificates

Exist for Geberit Mepla, Geberit Mapress C-STAHl, Geberit Mapress EDELSTAHL, Geberit Mapress Kupfer, Nussbaum Cupress, Nussbaum Optipress, Uponor Unipipe, Viega-'profipress', Viega-'profipress G', Viega-'sanfix P', Viega-'sanpress', Viega-'Viegatherm P', Wavin Tigris. The TÜV-certificates confirm that REMS crimping tools are suitable for producing perfect and system-conformity pressing joints corresponding to these systems.

Suitability test according to DVGW W 534 (potable water)

Pressing joints produced with REMS pressing tools were tested by the state-operated material testing institute in Darmstadt/Germany or the material testing institute of the Land of North-Rhine-Westphalia, Germany according to DVGW work sheet W 534. These material testing institutes are certified by the DVGW for making these tests. A representative cross-section of press joints of pressfitting systems Geberit Mapress Edelstahl, Raccorderie Metalliche inoxPRES, Raccorderie Metalliche steelPRES, Uponor Unipipe, Viega Megapress, Viega Profipress and Viega Raxofix. was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.

Suitability test according to DVGW G 5614/VP 625 or prEN 1254-7 (gas)

Pressing joints made with REMS pressing tools have been tested by the TÜV or by the Land Material Testing Institute Nordrhein-Westfalen or the DVGW Research Institute Karlsruhe according to DVGW Regulations G 5614/VP 625 or by the BSI (UK) according to prEN 1254-7. A representative cross-section of pressing joints of the pressfitting systems Geberit Mapress Edelstahl Gas, Geberit Mapress Kupfer Gas, Henco Gas, IBP >B<press Gas, Kembla KemPress Gas, Pegler Yorkshire X-Press Copper Gas, Raccorderie Metalliche inoxPRES Gas, Uponor MLC-G, Valsir PEXAL Gas, Viega Profipress G, Viega Pexfit G, Viega Sanpress INOX G, Viega PropressG GAS System (AUS) was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.



potable water



gas

Hold-Harmless and Indemnification Agreement

REMS is the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools.

A hold-harmless and indemnification agreement exists with the:

Zentralverband Sanitär Heizung Klima (Central Organization for the Sanitary-, Heating- and Climatization Industries),
Rathausallee 6, D-53757 St. Augustin,
referred to in the following as "ZVSHK",

Bundesindustrieverband Technische Gebäudeausrüstung e.V.,
Hinter Hoben 149, 53129 Bonn,
referred to in the following as "BTGA",

Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (German Association for Coolant & Air-Conditioning Profession Industries),
Kaiser-Friedrich-Straße 7, D-53113 Bonn,
referred to in the following as "VDKF",

Schweizerisch-Liechtensteinischem Gebäudetechnikverband (Swiss-Liechtenstein Technical Building Association),
Auf der Mauer 11, CH-8023 Zürich,
referred to in the following as "suissetec",

The Zentralverband Sanitär Heizung Klima (ZVSHK), the Bundesindustrieverband Technische Gebäudeausrüstung e. V. (BTGA), the Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (VDKF) and the Schweizerisch-Liechtensteinische Gebäudetechnikverband (suissetec) have made liability acceptance agreements in the interests of trade and industry with REMS GmbH & Co KG (REMS) for the radial pressing tools.

- Manual radial press REMS Eco-Press
- Cordless radial press REMS Mini-Press 14V ACC
- Cordless radial press REMS Mini-Press 22V ACC
- Cordless radial press REMS Mini-Press S 22V ACC
- Electric radial press REMS Power-Press SE
- Electro-hydraulic radial press REMS Power-Press
- Electro-hydraulic radial press REMS Power-Press ACC
- Electro-hydraulic radial press REMS Power-Press XL ACC
- Cordless radial press REMS Akku-Press 14V
- Cordless radial press REMS Akku-Press 14V ACC
- Cordless radial press REMS Akku-Press 22V ACC
- Cordless radial press REMS Akku-Press 22V ACC Connected
- Cordless radial press REMS Akku-Press XL 45 kN 22V ACC
- REMS pressing tongs
- REMS pressing rings
- REMS pressing tongs Mini

This makes REMS the first system-independent machine- and tool manufacturer to have concluded a hold-harmless and indemnification agreement for pressing tools. The conclusion of the agreement was effected on the basis of a successful cooperation established on partnership between REMS, the crafts, trades and industry and their organizations.

Eligible for services and performances from this agreement are all independent professional craftsmen, and companies of such, who are enrolled in the register of artisans and craftsmen (referred to in the following as "SHK-Establishments"), in as far as they have been members of the crafts guild of the sanitary- heating- and climatization enterprises competent for their business location at the time the damage event has arisen, and this crafts guild is associated with a regional guild association, which is a member of the ZVSHK.

Entitled to the services from the agreement with the BTGA are all building technology companies (hereinafter referred to as "TGA companies") insofar as they were a member of the Land Industry Association **Technical Building Equipment** responsible at the seat of their company at the time of the damage case and therefore an indirect member of the BTGA or direct member of the BTGA.


Eligible for services and performances from this agreement with the VDKF are all coolant systems companies or professional organisations (referred to as Coolant and Air-Conditioning Profession Industries) who, at the time the damage is caused, are members of the VDKF.

Eligible for services and performances from this agreement are all building systems companies (following TGA companies) who, at the time the damaged is caused, are members of suissetec.

In as far as the radial pressing tools mentioned show a defect with regard to construction, manufacture or material, or if the operator's manuals are faulty, thereby causing damage for the customer of the SHK-establishment, the Coolant and Air-Conditioning Profession Industries, or the TGA-companies, for which the SHK-establishment or the TGA-company is liable, then REMS shall be additionally liable - aside of the statutory prescriptions - for the consequences resulting from leakage, in accordance with the stipulations and provisions of this hold-harmless agreement.

The assumption of liability agreements apply regardless of which pressfitting system is pressed with the suitable REMS pressing tools. The current status regarding suitability of the REMS pressing tools for pressfitting systems can be viewed on the Internet: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

For more information please contact info@rems.de.

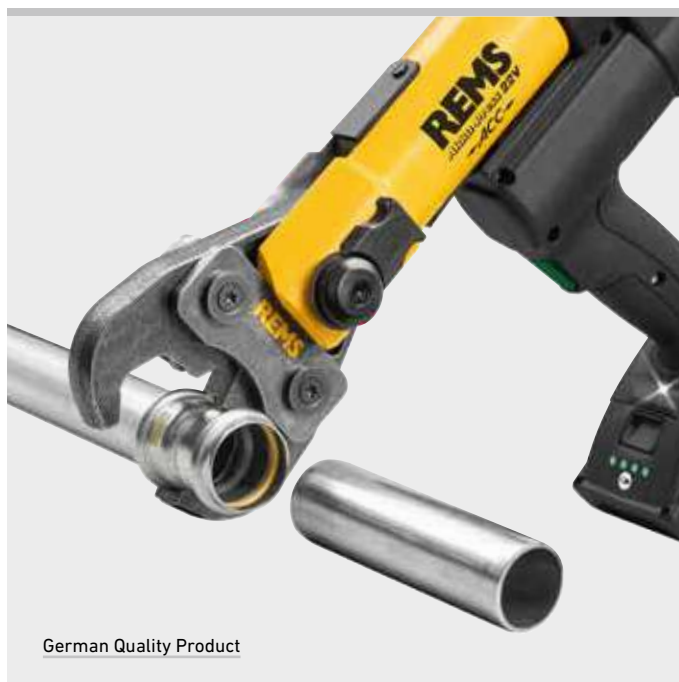

German Quality Product

Reliable and safe: REMS was the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools as early as the year 2000.



REMS cropping tongs

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

High performance cropping tongs in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to hardness classification 4.8 (400 N/mm²) M 6 – M 12

REMS cropping tongs – for cutting threaded rods.


Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process. Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr.

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting.

Cutting device in pliers design (**Patent EP 1 459 825, patent US 7,284,330**). Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force. All cropping tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press.



Supply format

REMS cropping tongs. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6 – M 12. In a carton.

Description	for threaded rods	Art.-No.
REMS cropping tongs M 6*	M 6	571890
REMS cropping tongs M 8*	M 8	571895
REMS cropping tongs M 10	M 10	571865
REMS cropping tongs M 12	M 12	571870

German Quality Product



Patent EP 1 459 825
Patent US 7,284,330

Accessories

Description	for threaded rods	Art.-No.
Cropping inserts M 6 (pair)	M 6	571891
Cropping inserts M 8 (pair)	M 8	571896
Cropping inserts M 10 (pair)	M 10	571866
Cropping inserts M 12 (pair)	M 12	571871
Steel case with insert for 6 cropping tongs/pressing tongs and compartment for pipe cutter up to 42 mm		570295



REMS cable shear

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

High-grade cable shear in forged and specially hardened steel for cutting electric cable.

Electric cable ≤ 300 mm² (Ø 30 mm)

REMS cable shear – Easy cutting of electric cable.

Made of forged and specially hardened steel.

Replaceable cutting blades manufactured on CNC production centres ensure a precision blade geometry and long service life. Large cutting range.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.



German Quality Product



Supply format

REMS cable shear. Cable shears with 2 changeable cable cutters for electric cables ≤ 300 mm² (Ø 30 mm). In a carton.


Description	Art.-No.
REMS cable shear	571887



Accessories

Description	Art.-No.
Cable cutters (pack of 2)	571889



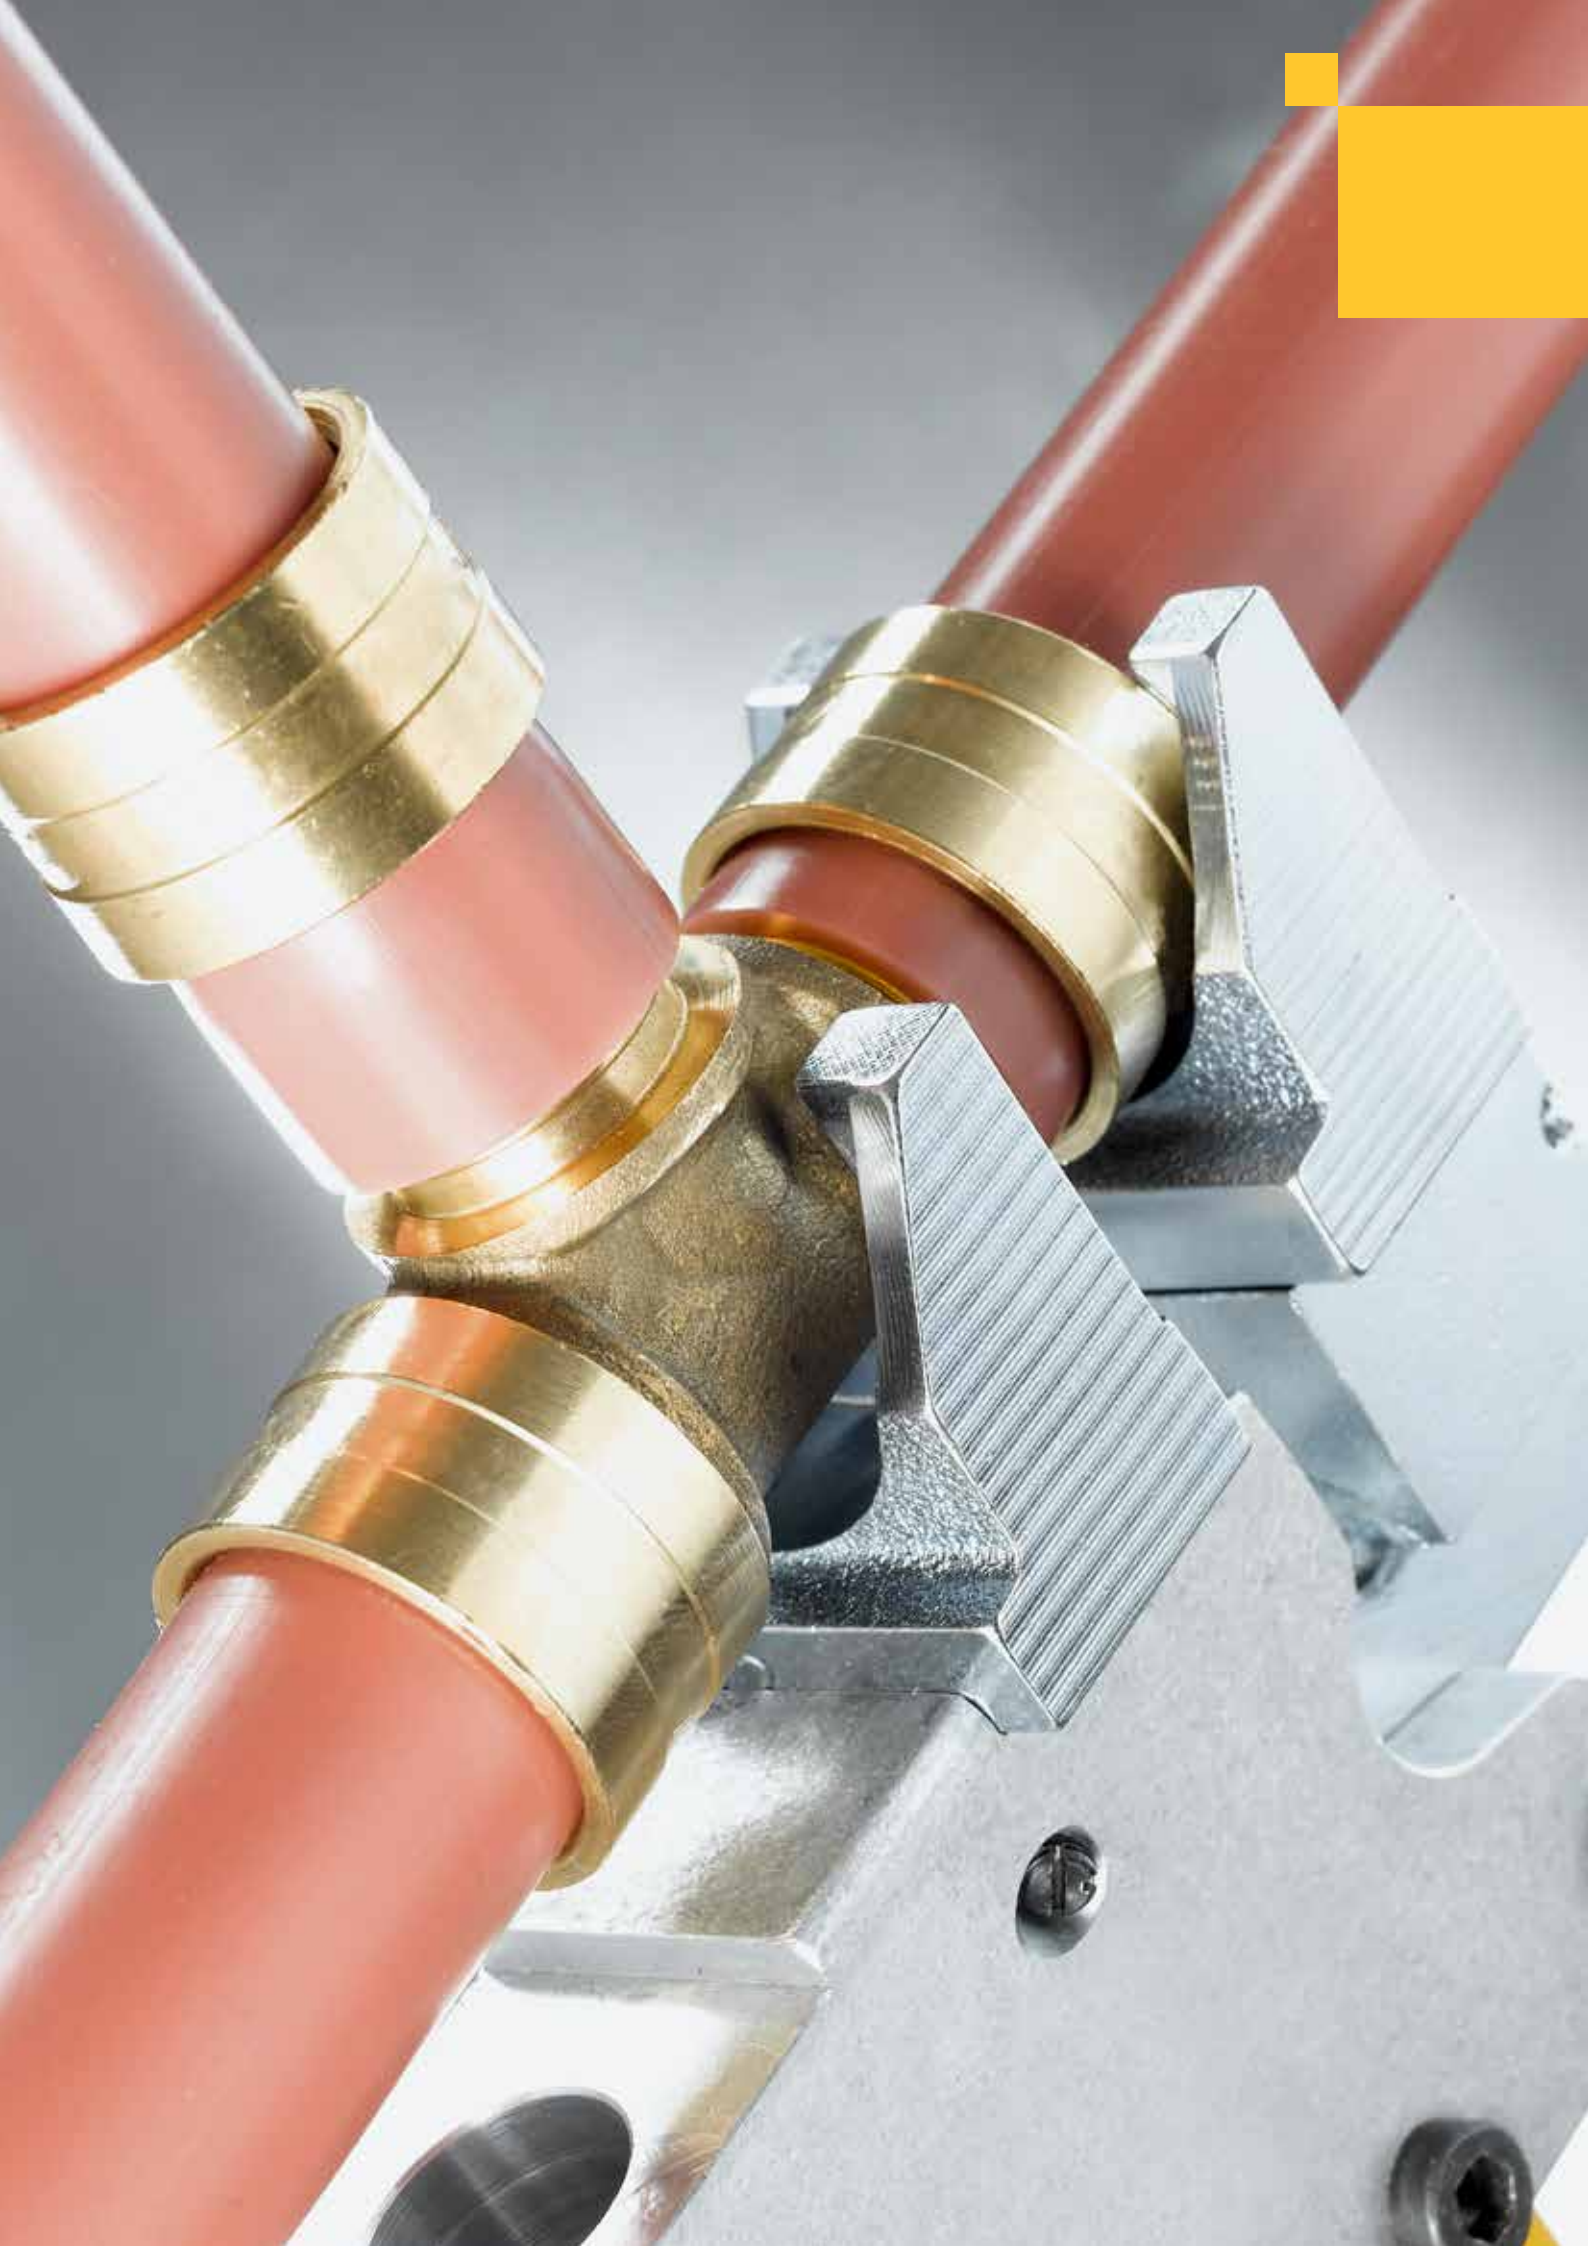

Axial Press Jointing

	Cordless axial press 30 22V Compression heads	242
	Manual axial press	243
	Cordless axial press 25 22V Cordless axial press 25 L 22V	244
	Compression heads	246

REMS Ax-Press 30 22V

Cordless axial press 30 kN

Compact, handy electric tool for producing compression sleeve joints with crimping sleeve. For trade and industry. For the building site and the workshop. Li-Ion 22V Technology. For battery and corded operation.

Axial compression \varnothing 12–32 mm

REMS Ax-Press 30 22V – up to \varnothing 32 mm. Ultra light, ultra small, ultra handy, ultra fast. Li-Ion 21.6 V, 2.5 Ah battery for approx. 220 pressings Georg Fischer pfcI ALUPEX-EXPRESS \varnothing 16 mm with one battery charge*.

Compression heads for all common systems

Complete assortment of REMS compression heads for all common compression sleeve systems with crimping sleeve. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and correspond to the respective compression sleeve system. Thus perfect system-conformity, safe jointing.

Design

Compact, handy, light. Drive unit with battery only 4.6 kg. Vertically from the drive unit located pressing device for seating the compression heads. Can be used anywhere, free hand, over head, in confined spaces. Optimum weight distribution for one-hand operation. Drive unit with inserted compression heads can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Compression heads and expander heads quickly interchangeable, without tools. Secure spring lock seating of compression heads.

Drive

High pressing force for perfect pressing in seconds, e.g. \varnothing 26 mm in only 5 s. Thrust force 30 kN. Powerful electro-hydraulic drive, eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6 V, 2.5Ah battery for approx. 220 pressings, 4.4 Ah for approx. 380 pressings, 5.0 Ah for approx. 430 pressings, 9.0Ah for approx. 780 pressings Georg Fischer pfcI ALUPEX-EXPRESS \varnothing 16 mm with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60°C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 15A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.

Supply format

REMS Ax-Press 30 22V Basic-Pack. Cordless axial press 30 kN for producing compression sleeve joints with crimping sleeve \varnothing 12–32 mm. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240V, 50–60Hz, 70W. In sturdy steel case.

	Art.-No.
	573018

Accessories

Description	Art.-No.
REMS Ax-Press 30 22V drive unit , without battery	573008
Battery Li-Ion 21.6V, 2.5 Ah	571571
Battery Li-Ion 21.6V, 4.4 Ah	571574
Battery Li-Ion 21.6V, 5.0 Ah	571581
Battery Li-Ion 21.6V, 9.0 Ah	571583
Rapid charger 100–240V, 50–60Hz, 90W	571585
Rapid charger 100–240V, 50–60Hz, 290W	571587
Voltage supply 220–240V/21.6V, 50–60Hz, 15A , for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with insert	573282
REMS Lumen 2800 22V , cordless LED flood light, see page 111	

REMS compression heads

Compression sleeve system	Compression head	Art.-No.
Brasstech Raptor/ Metalpex/ Raptor 2/ MULTitermoSAN	ME 14 (pack of 2)	573100
	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108
	ME 32 (pack of 2)	573110
General Fittings Serie 5400	ME 14 (pack of 2)	573100
	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108
	ME 32 (pack of 2)	573110



e.g. Brasstech, General Fittings, Georg Fischer pfcI

German Quality Product



Info



REMS compression heads

Compression sleeve system	Compression head	Art.-No.
Georg Fischer pfcI ALUPEX-EXPRESS/ Alupex Gas System	ME 16 (pack of 2)	573102
	ME 20 (pack of 2)	573106
	ME 26 (pack of 2)	573108
Logstor	ME 16 (pack of 2)	573102
	LR 20 (pack of 2)	573430
	LR 22 (pack of 2)	573432
	LR 25 (pack of 2)	573434
	LR 28 (pack of 2)	573436
	LR 32 (pack of 2)	573438

REMS Ax-Press HK / H

One-hand axial press / Manual axial press

Universal manual axial press for producing compression sleeve joints.

Axial compression Ø 12 – 32 mm

REMS Ax-Press HK – universal up to Ø 22 mm
Ultra small, ultra light, ultra handy. Only 1.1 kg

REMS Ax-Press H – universal up to Ø 32 mm.
Handy and light. Only 1.4 kg.

Complete assortment of REMS compression heads, quickly interchangeable.

System advantage

Only **one** type of compression heads for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 22V ACC, REMS Ax-Press 25 L 22V ACC. Thus easy, economic stocking.

Compression heads

Full range of REMS compression heads for all common compression sleeve systems (page 246 – 247). Choice of REMS compression heads with spring lock for seating common compression inserts. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and meet the demands of compression sleeve systems. Thus perfect system-conformity, safe jointing.

Twin compression heads

REMS twin compression heads with two holders each which interleave, for pipe unions of different dimensions (page 246). No need to change compression heads. Extremely simple, saves time.

Design

Compact, job site proven. Handy and light. REMS Ax-Press HK drive unit only 1.1 kg. REMS Ax-Press H drive unit only 1.4 kg. Works anywhere, free-hand, also in tight spots. 66 mm stroke. Quick-acting forward and release for easy, fast operation. Selectable compression head position (**Patent DE 10 2004 018 429, Patent ES 2 273 563, Patent FR 05 03513**) for pressing compression sleeve connectors with a clamping distance of ≤ 161 mm in one action and for double pressings. Quick-change compression heads and pressing inserts without tools. Secure fit of compression heads and pressing inserts by spring catch. REMS Ax-Press H with overload protection.

Expanding

Various pipe expanders and complete range of REMS expanding heads for all common compression sleeve systems (page 251 – 255).



Patent DE 10 2004 018 429
Patent ES 2 273 563
Patent FR 05 03513

e.g.
AC-FIX,
aquatherm,
BARBI,
FERRO systems
BRASELI,
Brass & Fittings,
COMAP,
EUROP'FLUIDES,
Fittings Estándar,
PB TUB,
PLÁSTICOS FERRO,
REVI,
RIQUIER,
TECE,
TIEMME,
VELTA



Supply format

REMS Ax-Press HK drive unit. Axial press for single-handed operation for producing compression sleeve joints Ø 12 – 22 mm. 66 mm stroke. With quick-acting forward and release. For driving REMS compression heads. In a carton.

	Art.-No.
	574302

Supply format

REMS Ax-Press H drive unit. Manual axial press for producing compression sleeve joints Ø 12 – 32 mm. 66 mm stroke. With quick-acting forward and release. For driving REMS compression heads. In a carton.

	Art.-No.
	574300

German Quality Product



Accessories

Description	Art.-No.
REMS compression heads see page 246 – 247.	
Carrying bag for REMS Ax-Press HK/H drive unit and compression heads	574437
Case with inlay for REMS Ax-Press HK drive unit and compression heads	574352



REMS Ax-Press 25 22V ACC
REMS Ax-Press 25 L 22V ACC

Cordless axial press 20 kN with automatic return
 Cordless axial press 13 kN with automatic return

Compact, handy power tool with automatic return for manufacturing compression sleeve joints. Li-Ion 22V Technology. For battery and corded operation. For trade and industry. For the building site and the workshop.

Axial compression \varnothing 12 – 40 mm

REMS Ax-Press 25 22V ACC – universal up to \varnothing 40 mm. Super light, super handy. Fast. With automatic return. Optimum weight distribution for single-hand operation. Swivelling compression device. Li-Ion 21.6 V, 2.5 Ah battery for approx. 500 pressings REHAU RAUTITAN PX \varnothing 16 mm with one battery charge*.

System advantage

Only **one** type of compression heads for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 22V ACC, REMS Ax-Press 25 L 22V ACC. Thus easy, economic stocking.

Compression heads for all common systems

Full range of REMS compression heads for all common compression sleeve systems (page 246 – 247). Choice of REMS compression heads with spring lock for seating common compression inserts. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and meet the demands of compression sleeve systems. Thus perfect system-conformity, safe jointing.

Twin compression heads

REMS twin compression heads with two holders each which interleave, for pipe unions of different dimensions (page 246). No need to change compression heads. Extremely simple, saves time.

Design

Compact, handy, light. REMS Ax-Press 25 22V ACC drive machine with battery weighs only 3.0 kg, only 28 cm long REMS Ax-Press 25 L 22V ACC drive machine with battery weighs only 3.2 kg, only 31 cm long REMS Ax-Press 25 22V ACC and REMS Ax-Press 25 L 22V ACC with 40 mm stroke respectively REMS Ax-Press 25 22V ACC with preset compression head position for pressing compression sleeve connectors with a clamping distance $a \leq 82$ mm in one action REMS Ax-Press 25 L 22V ACC with selectable compression head position for pressing compression sleeve connectors with a clamping distance $a \leq 116$ mm in one action and for double pressings. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling compression device for working in confined area. Compression heads quickly interchangeable, without tools. Secure spring lock seating of compression heads.

Drive

Enormous pressing force for fast and perfect jointing. Thrust force REMS Ax-Press 25 22V 20 kN, thrust force REMS Ax-Press 25 L 22V 13 kN. Powerful electro-hydraulic drive with automatic return (ACC), eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6 V, 2.5 Ah battery for approx. 500 pressings, 4.4 Ah for approx. 880 pressings, 5.0 Ah for approx. 1000 pressings, 9.0 Ah for approx. 1800 pressings REHAU RAUTITAN PX \varnothing 16 mm with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240V, 90W. Rapid charger 100 – 240V, 290W, for shorter charging times, as accessory. Voltage supply 220 – 240V/21.6 V, 15 A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.

Expanding

Various pipe expanders and complete range of REMS expanding heads for all common pressure sleeve systems

REMS Ax-Press 25 22V ACC



←ACC→
Automatic Circuit Control

with automatic circuit control and charging status check

e.g.
 aquatherm,
 General Fittings,
 IVT,
 REHAU,
 REVEL,
 Seppelfricke,
 TECE,
 TIEMME,
 Würth



REMS Ax-Press 25 L 22V ACC



←ACC→
Automatic Circuit Control

with automatic circuit control and charging status check

e.g.
 AC-FIX,
 BARBI,
 FERRO systems
 BRASELI,
 Brass & Fittings,
 EUROP FLUIDES,
 Fittings Estándar,
 PLÁSTICOS FERRO,
 Velta



German Quality Product



Supply format

REMS Ax-Press 25 22V ACC Basic-Pack. Cordless axial press 20 kN for producing compression sleeve joints Ø 12–40 mm. 40 mm stroke, for pressing compression sleeve connections with a clamping distance $a \leq 82$ mm. For driving REMS pressing heads. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling pressing device. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240V or 110 V, 50–60 Hz, 70 W. Without compression heads. In sturdy steel case.

	Art.-No.	
	573022	

Other voltages on request.

Supply format

REMS Ax-Press 25 L 22V ACC Basic-Pack. Cordless axial press 13 kN for producing compression sleeve joints Ø 12–40 mm. 40 mm stroke, for pressing compression sleeve connections with a clamping distance $a \leq 116$ mm. For driving REMS pressing heads. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling pressing device. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240V or 110 V, 50–60 Hz, 70 W. Without compression heads. In sturdy steel case.

	Art.-No.	
	573023	

Other voltages on request.



Accessories

Description	Art.-No.
REMS compression heads see page 246–247.	
REMS Ax-Press 25 22V ACC drive unit, a ≤ 82 mm, without battery	573020
REMS Ax-Press 25 L 22V ACC drive unit, a ≤ 116 mm, without battery	573021
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240V, 50–60 Hz, 90W	571585
Rapid charger 100–240V, 50–60 Hz, 290W	571587
Voltage supply 220–240V/21.6V, 50–60 Hz, 15A, for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with insert	578290
REMS Lumen 2800 22V, cordless LED flood light, see page 111	



REMS compression heads

Accessories for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 22V ACC, REMS Ax-Press 25 L 22V ACC



REMS compression heads with spring lock for commercially available press inserts

Description	Use
Compression head Basic 20 (pack of 2)	for pipe fittings 20 mm and for standard press inserts outer Ø 20 mm
Compression head Basic 25 (pack of 2)	for pipe fittings 25 mm and for standard press inserts outer Ø 25 mm
Compression head Basic 32 (pack of 2)	for pipe fittings 32 mm and for standard press inserts outer Ø 32 mm



REMS twin compression heads

Description	Use
Twin compression head RH 16/20 (pack of 2)	for pipe fittings 16 and 20 mm



REMS compression head for T-pieces, elbows, splitters, transition pieces

Description	Use
Compression head UNI T/L (piece)	for T-pieces, elbows, splitters, in combination with an additional compression head; for transition pieces, in combination with a support bolt



REMS support bolt for transition pieces

Description	for transition pieces inch	Art.-No.
Support bolt 3/8"	3/8	573647
Support bolt 1/2"	1/2	573648
Support bolt 3/4"	3/4	573649

Commercially available press inserts:

T's and elbows

Dm 16

Dm 20

Dm 22

Dm 25

Dm 32



REMS compression heads

Accessories for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 22V ACC, REMS Ax-Press 25 L 22V ACC

Select compression heads yourself!

Search for the required compression sleeve system in the table below and select the correct compression heads.

High-grade compression heads in forged and specially hardened steel. Quickly interchangeable, without tools. The REMS compression heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, safe jointing. Drive through REMS axial presses.



Pressure sleeves system	Compression head mm	Number of pressing heads	fits REMS Ax-Press				Art.-No.
			HK ¹⁾	H	25	25L	
PB TUB Sertigliss	UNI 12	2	•	•			573630
	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2	•	•			573640
	UNI 32	2	•	•			573644
	UNI T/L**	1	•	•			573646
	Basic 25*	2	•	•			573616
	Basic 32*	2	•	•			573628
PLÁSTICOS FERRO FERROPLAST GPF AXIAL	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2	•	•			573640
	UNI 32	2	•	•			573644
	UNI T/L**	1	•	•			573646
	Basic 20*	2	•	•			573624
	Basic 25*	2	•	•			573616
	Basic 32*	2	•	•			573628
PLUMBING PLUS EZIPEX Sleeve Water (AUS)	RH 16 L	2			•		573150
	RH 20 L	2			•		573152
	RH 16/20 L	2			•		573158
	RH 25	2			•		573154
	RH 32	2			•		573156
PLUMBING PLUS EZIPEX Sleeve Gas (AUS)	RH 16 L	2			•		573150
	RH 20 L	2			•		573152
	RH 16/20 L	2			•		573158
	RH 25	2			•		573154
	RH 32	2			•		573156
REHAU RAUTHERM SDR 11 LX	RH 12	2			•		573164
	RH 16	2			•		573166
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
REHAU RAUTHERM S (REHAU HAS)	RH 17	2			•		573168
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
	RE 40	2			•		573176
REHAU (GBR) EVERLOC	RH 16	2			•		573166
	RH 20	2			•		573170
	RH 25	2			•		573154
	RH 32	2			•		573156
REVEL-PEX	RV 16	2		•	•		573400
	RV 20	2		•	•		573402
	RV 25	2		•	•		573404
	RV 32	2		•	•		573406
REVI REVIUNI	TC 12/14/16	2			•		573360
	TC 18/20	2			•		573364
	TC 25	2			•		573367
	TC 32	2			•		573370
REVI REVITERM Riquier à glissement	UNI 12	2	•	•			573630
	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2	•	•			573640
	UNI 32	2	•	•			573644
	UNI T/L**	1	•	•			573646
	Basic 25*	2	•	•			573616
	Basic 32*	2	•	•			573628
Seppelfricke SD Sistemi Italia Sylver	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
	RO 16	2			•		573184
	RO 20	2			•		573186
Seppelfricke SD Sistemi Italia Neroflex	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
	RO 16	2			•		573184
	RO 20	2			•		573186
TECE TECEflex	TC 12/14/16	2			•		573360
	TC 18/20	2			•		573364
	TC 25	2			•		573367
	TC 32	2			•		573370
TIEMME Assialpex	RE 16	2			•		573160
	RE 20	2			•		573162
	RE 25	2			•		573172
	RE 32	2			•		573178
Tradelink TradePex Sleeve Water	RH 16 L	2			•		573150
	RH 20 L	2			•		573152
	RH 16/20 L	2			•		573158
	RH 25	2			•		573154
	RH 32	2			•		573156
Tradelink TradePex Sleeve Gas	RH 16 L	2			•		573150
	RH 20 L	2			•		573152
	RH 16/20 L	2			•		573158
	RH 25	2			•		573154
	RH 32	2			•		573156
Velta Eurojauge	UNI 12	2	•	•			573630
	UNI 16	2	•	•			573632
	UNI 20	2	•	•			573636
	UNI 25	2	•	•			573640
	UNI T/L**	1	•	•			573646
	Basic 25*	2	•	•			573616
Würth PRINETO	IV 16/17	3			•		573320
	IV 20/21	3			•		573325
	IV 25/26	3			•		573330
	IV 32/33	3			•		573335

Pressure sleeve systems for gas installations may only be pressed with the yellow-highlighted pressing heads in the table. Observe the national regulations.

Compression heads for additional compression sleeve systems on request.

¹⁾ For producing compression sleeve connection of Ø 12–22 mm.

*** Compression heads with spring lock**

Compression head Basic 20 for pipe fittings 20 mm and for standard press inserts outer Ø 20 mm

Compression head Basic 25 for pipe fittings 25 mm and for standard press inserts outer Ø 25 mm

Compression head Basic 32 for pipe fittings 32 mm and for standard press inserts outer Ø 32 mm

**** Compression head for T-pieces, elbows, splitters, transition pieces**

Compression head UNI T/L for T-pieces, elbows, splitters, in combination with an additional compression head; for transition pieces, in combination with a support bolt, see page 246.



Expanding Extracting

	Hand tube expander Cu	250
	Expander head Cu	250
	One-hand pipe expander	251
	Hand tube expander P	251
	Cordless pipe expander Cu	252
	Cordless pipe expander P	252
	Cordless pipe expander P-CEF	252
	Electro-hydraulic pipe expander P-CEF	254
	Expander head P Expander head P-CEF	255
	Hand tube extractor	256
	Electric tube extractor Electric tube expander	257

REMS Ex-Press H

One-hand pipe expander

Robust, compact quality tool for expanding tubes.
For one-hand operation.

PEX tubes Serie S 5 according to ISO 4065 Ø 12–40 mm

REMS Ex-Press H – universal up to Ø 40 mm.

Robust, compact quality tool. Super light, only 0.7 kg.
Stepped mandrels for expanding several tube dimensions, no tool change required.
Torsion-free, leveraged expander tool for effortless expanding.
For one-hand operation.

Supply format

REMS Ex-Press H. One-hand pipe expander for PEX tubes Serie S 5 according to ISO 4065 Ø 12–40 mm. In a carton.

	Art.-No.
	150550



German Quality Product



REMS Ex-Press P

Hand tube expander

Proven quality tool for expanding tubes.
Plastic tubes, multi-layer composite tubes Ø 12–32 mm

REMS Ex-Press P – for expanding tubes. Conical mandrel for even and concentric expanding.

Design

Robust quality tool. Torsion-free, power-transmitting expander levers with ergonomically designed handles, for effortless expanding. Conical mandrel (taper angle 18°) for even and concentric expanding. Long mandrel guidance, spring-loaded mandrel release. Also for other suitable makes of expander heads.

Expander heads for all common systems

Complete assortment of REMS expander heads P for all common compression sleeve systems (page 255). Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding.

Supply format

REMS Ex-Press P Set. Hand tube expander for plastic tubes and multi-layer composite tubes Ø 12–32 mm. REMS Ex-Press P. Expander heads P for tubes in mm. In sturdy steel case.

Description	Compr. sleeve system	Art.-No.
Set AT P 16 + 20 + 25	aquatherm SHT PB/PE-Rohre	150021
Set AT V 16 + 20 + 25	aquatherm SHT Mehrschicht-Metall- verbundrohre	150033
Set IV 16/17 + 20/21 + 25/26	IVT PRINETO, Würth PRINETO	150026
Set RH HAS 17 + 20 + 25	REHAU RAUTHERM S (REHAU HAS)	150027
Set RH HIS 16 + 20 + 25	REHAU RAUTITAN flex/ gas flex/pink/his, General Fittings Serie 3400 PEX, REVEL, Seppelfricke SD Sistemi Italia Neroflex, TIEMME Assialpex	150028
Set RH MKV 16 + 20 + 25	REHAU RAUTITAN stabil/ gas stabil, General Fittings Serie 3400 PEX/AL/PEX, Seppelfricke SD Sistemi Italia Sylver	150022
Set RH 16 + 20 + 25	REHAU RAUTHERM (série S 5), REHAU (GBR) EVERLOC	150029
Set TC 16 + 18/20 + 25	TECE TECEflex, General Fittings Serie 3700 PEX / PEX/AL/PEX	150025

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads, see table page 255.

Accessories

Description	Art.-No.
Expander heads P see page 255.	
Expander drive REMS Ex-Press P (taper angle 18°)	150510
Steel case with insert	150600



German Quality Product



Info

e.g.
aquatherm,
General Fittings,
IVT,
REHAU,
REVEL,
Seppelfricke,
TECE,
TIEMME,
Würth



REMS Ex-Press 22V ACC

Cordless pipe expander 20 kN with automatic return

Compact, handy power tool with automatic return for fast, easy expansion of pipes/rings. Li-Ion 22V Technology. For cordless and mains operation. For trade and industry. For the building site and the workshop.

Expander Cu

for holding the REMS Cu expander heads and suitable expander heads of other makes for:

Soft copper pipes, $s \leq 1.5 \text{ mm}$ $\varnothing 8 - 42 \text{ mm}$
 $\varnothing \frac{3}{8} - 1\frac{3}{4}''$

Soft aluminium pipes,
soft precision steel pipes, $s \leq 1.2 \text{ mm}$ $\varnothing 8 - 42 \text{ mm}$
 $\varnothing \frac{3}{8} - 1\frac{3}{4}''$

Soft stainless steel pipes, $s \leq 1 \text{ mm}$ $\varnothing 8 - 42 \text{ mm}$
 $\varnothing \frac{3}{8} - 1\frac{3}{4}''$

Expander P

for holding the REMS P expander heads and suitable expander heads of other makes for:

Plastic tubes, composite tubes $\varnothing 12 - 40 \text{ mm}$

Expander P-CEF

for holding the REMS P-CEF expander heads and suitable expander heads of other makes for:

Cold Expansion Fittings made of plastic (P-CEF)
 $\varnothing 16 - 40 \text{ mm}$
 $\varnothing \frac{1}{2} - 1\frac{1}{2}''$
 $s \leq 4.95 \text{ mm}$

REMS Ex-Press 22V ACC – fast, easy electric expanding up to $\varnothing 42 \text{ mm}$. With automatic return. Conical expanding mandrel for even centric expanding. E.g. REMS Ex-Press Cu 22V ACC with Li-Ion 21.6 V, 2.5 Ah battery for approx. 600 expansions of soft copper pipe $15 \times 1 \text{ mm}$ with one battery charge*.

System advantage

Only **one** drive unit, optionally with **expander Cu** for holding the REMS Cu expander heads and suitable expander heads of other makes, **expander P** for holding the REMS P expander heads and suitable expander heads of other makes, **expander P-CEF** for holding the REMS P-CEF expander heads and suitable expander heads of other makes.

Expander heads for all common systems

Quick-change, without tools. Also for other suitable makes of expander tongs.

REMS expander heads Cu (page 250) with extra long segments provide an extra long muff for a perfect pipe joint in accordance with DVGW. Collar on the expander head for calibrating unround pipe ends.

REMS expander heads P (page 255) are system-specific and correspond to the requirements of the respective compression sleeve systems. Therefore, perfectly system-conformant, exact expanding.

REMS expander heads P-CEF (page 255) are system-specific and correspond to the requirements of the respective systems. Automatic, gradual expansion until reaching the given end position which is determined by the expander head.

Design

Ultra light, ultra small, ultra handy. Drive unit with battery pack weighs only 2.7 kg. Drive unit with expander only 26 cm long. Can therefore be used anywhere, free hand, over head, also in very confined spaces. Optimum weight distribution for one-hand operation. Ergonomically designed housing. LED work light for illuminating the work place. Expanding mandrel of the Cu and P expanders with conical angle 18° , expanding mandrel of the P-CEF expander with conical angle 20° , or even centric expanding. Long mandrel guide, spring-loaded mandrel recoil. Also for other suitable makes of expander heads.

Drive

High expanding force for perfect, split-second expanding. Thrust force 20 kN. Powerful electro-hydraulic drive with automatic return (ACC), with powerful battery motor 21.6V, 380W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety switch.



REMS Ex-Press Cu



REMS Ex-Press P



REMS Ex-Press P-CEF

German Quality Product



Info

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful.

REMS Ex-Press Cu 22V ACC with Li-Ion 21.6 V, 2.5 Ah battery for approx. 600 expansions, 4.4 Ah for approx. 1050 expansions, 5.0 Ah for approx. 1200 expansions, 9.0 Ah for approx. 2160 expansions of soft copper pipe $15 \times 1 \text{ mm}$ with one battery charge*.

REMS Ex-Press P 22V ACC with Li-Ion 21.6 V, 2.5 Ah battery for approx. 750 expansions, 4.4 Ah for approx. 1320 expansions, 5.0 Ah for approx. 1500 expansions, 9.0 Ah for approx. 2700 expansions of REHAU RAUTITAN flex $\varnothing 16 \times 2.2 \text{ mm}$ with one battery charge*.

REMS Ex-Press P-CEF 22V ACC with Li-Ion 21.6 V, 2.5 Ah battery for approx. 200 expansions, 4.4 Ah for approx. 360 expansions, 5.0 Ah for approx. 410 expansions, 9.0 Ah for approx. 740 expansions of Uponor Quick & Easy $\varnothing 16 \times 1.8$ with one battery charge*.

Graduated charging status check by coloured LEDs. Operating temperature range -10 to $+60^\circ\text{C}$. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6 V, 15 A output, for mains operation instead of Li-Ion xbattery 21.6 V, as accessory.

Supply format

REMS Ex-Press Cu 22V ACC Basic-Pack. Cordless pipe expander 20 kN for fast expanding of copper pipes \varnothing 8–42 mm. Electro-hydraulic drive with automatic return, with powerful 21.6V, 380W battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety switch. LED work light. Li-Ion 21.6V, 2.5Ah battery, 220–240V, 50–60 Hz, 70W rapid charger. Cu expander for holding the REMS Cu expander heads and suitable expander heads of other makes. Without expander heads. In sturdy steel case.

	Art.-No.
	575020

Other voltages on request.



Supply format

REMS Ex-Press P 22V ACC Basic-Pack. Cordless pipe expander 20 kN for fast expanding of plastic and composite tubes \varnothing 12–40 mm. Electro-hydraulic drive with automatic return, with powerful 21.6V, 380W battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety switch. LED work light. Li-Ion 21.6V, 2.5Ah battery, 220–240V, 50–60 Hz, 70W rapid charger. P expander for holding the REMS P expander heads and suitable expander heads of other makes. Without expander heads. In sturdy steel case.

	Art.-No.
	575021

Other voltages on request.



e.g.
aquatherm,
General Fittings,
IVT,
REHAU,
REVEL,
Seppelfricke,
TECE,
TIEMME,
Würth

Supply format

REMS Ex-Press P-CEF 22V ACC Basic-Pack. Cordless pipe expander 20 kN for fast expanding of plastic tubes \varnothing 16–40 mm. Electro-hydraulic drive with automatic return, with powerful 21.6V, 380W battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety switch. LED work light. Li-Ion 21.6V, 2.5Ah battery, 220–240V, 50–60 Hz, 70W rapid charger. P-CEF expander for holding the REMS P-CEF expander heads and suitable expander heads of other makes. Without expander heads. In sturdy steel case.

	Art.-No.
	575022

Other voltages on request.



e.g.
Brass & Fittings,
Uponor

Accessories

Description	Art.-No.
REMS Ex-Press 22V ACC drive unit, without expander, without battery	575010
Expander Cu for holding the REMS Cu expander heads and suitable expander heads of other makes for: Conical angle 18°.	575252
Expander heads Cu see page 250	
Expander P for holding the REMS P expander heads and suitable expander heads of other makes for: Conical angle 18°.	575253
Expander heads P see page 255.	
Expander P-CEF for holding the REMS P-CEF expander heads and suitable expander heads of other makes for: Conical angle 20°.	575256
Expander heads P-CEF see page 255.	
Expander tongs P-CEF (conical angle 20°), for accommodating the expander heads P-CEF 16–40 mm, ½–1½"	150515
Battery Li-Ion 21.6V, 2.5 Ah	571571
Battery Li-Ion 21.6V, 4.4 Ah	571574
Battery Li-Ion 21.6V, 5.0 Ah	571581
Battery Li-Ion 21.6V, 9.0 Ah	571583
Rapid charger 100–240V, 50–60 Hz, 90W	571585
Rapid charger 100–240V, 50–60 Hz, 290W	571587
Voltage supply 220–240V/21.6V, 50–60 Hz, 15A, for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with insert	578290
REMS Lumen 2800 22V, cordless LED flood light, see page 111	



REMS Power-Ex-Press P-CEF ACC

Electro-hydraulic pipe expander 34 kN with automatic return

Compact, handy power tool for fast, easy expanding of pipes/rings. For trade and industry. For the building site and the workshop.

Cold Expansion Fittings made of plastic (P-CEF)

Ø 16–63 mm

Ø ½–2"

s ≤ 6.3 mm

REMS Power-Ex-Press P-CEF ACC – Fast, easy electric expanding up to Ø 63 mm. With automatic return. For Uponor Quick & Easy and Giacomini GX System.

Expander heads

Large expanding capacity up to Ø 63 mm. Automatic, gradual expansion until reaching the given end position which is determined by the expander head. Use of the REMS P-CEF expander heads and suitable expander heads of other makes for: Expander 50–63 mm, 2", for holding the REMS P-CEF expander heads 50–63 mm, 2" and suitable expander heads of other makes. Expander 16–40 mm, ½–1½", for holding the REMS P-CEF expander heads 16–40 mm, ½–1½" and suitable expander heads of other makes, as an accessory.

Execution

Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.6 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip.

Drive

High pressing force for fast, perfect expanding. Thrust force 34 kN. Powerful electro-mechanical drive with automatic return (ACC), with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Safety tip switch.



German Quality Product



Supply format

REMS Power-Ex-Press P-CEF ACC Basic-Pack. Electro-hydraulic pipe expander 34 kN for expanding tubes/coils of the Uponor Quick & Easy system Ø 16–63 mm, Ø ½–2", s ≤ 6.3 mm. Electro-hydraulic drive with automatic retraction, with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Expanding device 50–63 mm, 2". Without expander heads. In sturdy steel case.

	Art.-No.	
	575017	

Note assembly instructions of system supplier. Battery tube expander for other systems on request. Other voltages on request.

Accessories

Description	Art.-No.	
Expander 16–40 mm, ½–1½" , for holding the P-CEF expander heads 16–40 mm, ½–1½"	575100	
Expander heads P-CEF see page 255.		
Steel case with insert	575278	



REMS expander heads P REMS expander heads P-CEF

REMS expander heads P

Complete assortment of REMS expander heads P for all common compression sleeve systems. Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding. Conical angle 18°. Driven by REMS Ex-Press P hand pipe expander (page 251), REMS Ex-Press P 22 V ACC cordless pipe expander (page 252–253) and by suitable pipe expanders of other makes.


Compression sleeve system	Expander head P Ø × s	Art.-No.
aquatherm grey pipe PB/PE-RT-Rohre	AT P 14 × 2.0	150828
	AT P 16 × 2.0	150842
	AT P 18 × 2.0	150873
	AT P 20 × 2.0	150882
	AT P 25 × 2.3	150912
aquatherm grey pipe Mehrschicht- Metallverbundrohre (MVR)	AT V 16 × 2.4	150843
	AT V 20 × 2.4	150883
	AT V 25 × 2.7	150913
	AT V 32 × 3.2	150957
	AT V 40 × 3.5	150958
General Fittings Serie 3400 PEX Gold-Fix	RH HIS 16 × 2.2	150849
	RH HIS 20 × 2.8	150888
	RH HIS 25 × 3.5	150916
	RH HIS 32 × 4.4	150945
General Fittings Serie 3400 PEX/AL/PEX Gold-Fix	RH MKV 16.2 × 2.6	150858
	RH MKV 20 × 2.9	150897
	RH MKV 25 × 3.7	150926
	RH MKV 32 × 4.7	150952
General Fittings Serie 3700 PEX	TC 16	150855
	TC 18/20	150894
	TC 25	150923
	TC 32	150950
General Fittings Serie 3700 PEX/AL/PEX	TC 16	150855
	TC 18/20	150894
	TC 25	150923
	TC 32	150950
HERZ QUICK FIX	HC P 16 × 2.0	150806
	HC P 20 × 2.0	150807
	HC P 26 × 3.0	150808
	HC P 32 × 3.0	150809
IVT PRINETO	IV 16 × 2.2/17 × 2.8	150845
	IV 20 × 2.8/21 × 3.4	150885
	IV 25 × 3.5/26 × 4.0	150914
	IV 32 × 4.4/33 × 4.9	150943
ÖÄG COMDURO	HC P 16 × 2.0	150806
	HC P 20 × 2.0	150807
	HC P 26 × 3.0	150808
	HC P 32 × 3.0	150809
REHAU RAUTHERM (série S 5)	RH 12 × 1.1	150812
	RH 16 × 1.5	150846
	RH 20 × 1.9	150886
	RH 25 × 2.3 (RH HAS 25 × 2.3)	150915
	RH 32 × 2.9 (RH HAS 32 × 2.9)	150944
REHAU RAUTHERM S (REHAU HAS)	RH HAS 17 × 2.0	150868
	RH HAS 20 × 2.0	150887
	RH HAS 25 × 2.3	150915
	RH HAS 32 × 2.9	150944
REHAU RAUTITAN flex/ RAUTITAN gas flex/ RAUTITAN pink/ RAUTITAN his	RH HIS 16 × 2.2	150849
	RH HIS 20 × 2.8	150888
	RH HIS 25 × 3.5	150916
	RH HIS 32 × 4.4	150945
	RH HIS 40 × 5.5	150946
REHAU RAUTITAN stabil/ RAUTITAN gas stabil	RH MKV 16.2 × 2.6	150858
	RH MKV 20 × 2.9	150897
	RH MKV 25 × 3.7	150926
	RH MKV 32 × 4.7	150952
	RH MKV 40 × 6.0	150947
REHAU (GBR) EVERLOC	RH 16 × 1.5	150846
	RH 20 × 1.9	150886
	RH 25 × 2.3 (RH HAS 25 × 2.3)	150915
	RH 32 × 2.9 (RH HAS 32 × 2.9)	150944
REVEL	RH HIS 16 × 2.2	150849
	RH HIS 20 × 2.8	150888
	RH HIS 25 × 3.5	150916
	RH HIS 32 × 4.4	150945
Seppelfricke SD Sistemi Italia Neroflex	RH HIS 16 × 2.2	150849
	RH HIS 20 × 2.8	150888
	RH HIS 25 × 3.5	150916
	RH HIS 32 × 4.4	150945
Seppelfricke SD Sistemi Italia Sylver	RH MKV 16.2 × 2.6	150858
	RH MKV 20 × 2.9	150897
	RH MKV 25 × 3.7	150926
	RH MKV 32 × 4.7	150952

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads. REMS expander heads P for additional compression sleeve systems on request.

Accessories for REMS pipe expander and other makes

Choose expander heads yourself!

Search for the required compression sleeve system in the table below and select the correct expander heads.

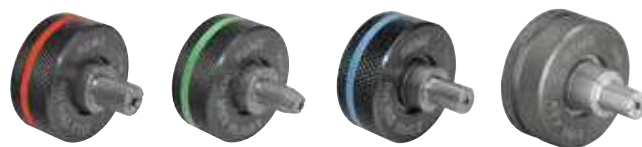

German Quality Product

REMS expander heads P

Complete assortment of REMS expander heads P for all common compression sleeve systems. Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding. Conical angle 18°. Driven by REMS Ex-Press P hand pipe expander (page 251), REMS Ex-Press P 22 V ACC cordless pipe expander (page 252–253) and by suitable pipe expanders of other makes.

Compression sleeve system	Expander head P Ø × s	Art.-No.
TIEMME Assialpex	RH HIS 16 × 2,2	150849
	RH HIS 20 × 2,8	150888
	RH HIS 25 × 3,5	150916
	RH HIS 32 × 4,4	150945
Würth PRINETO	IV 16 × 2.2/17 × 2.8	150845
	IV 20 × 2.8/21 × 3.4	150885
	IV 25 × 3.5/26 × 4.0	150914
	IV 32 × 4.4/33 × 4.9	150943

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads. REMS expander heads P for additional compression sleeve systems on request.



REMS expander heads P-CEF

Full range of REMS P-CEF expander heads for easy expanding of pipes/rings. Quick-change, without tools. The REMS P-CEF expander heads are system-specific and correspond to the requirements of the respective systems. Therefore, perfectly system-conformant, exact expanding. Conical angle 20°. Driven by REMS Ex-Press P-CEF 22 V ACC cordless pipe expander (page 252–253), REMS Power-Ex-Press P-CEF ACC electro-hydraulic pipe expander (page 254) and by suitable pipe expanders of other makes.

Compression sleeve system	Expander head P-CEF Ø × s	Art.-No.
Uponor Quick & Easy	P-CEF 16 × 1.8	150960
	P-CEF 20 × 1.9	150961
	P-CEF 25 × 2.3	150962
	P-CEF 32 × 2.9	150963
	P-CEF 40 × 3.7	150968
Expander drive P-CEF (taper angle 20°), for holding the P-CEF expander heads 16–40 mm, ½–1½"		150515

System-related and/or national differences of the wall thickness s of the pipes must be considered in the selection of the expander heads.

REMS Hurrigan H

Hand tube extractor

Economic manual tool for efficiently making T-branches for pipe installations without fittings.

Hard and soft copper tubes \varnothing 10–22 mm
 \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ "
 $s \leq 1.5$ mm

REMS Hurrigan H – for making T-branches yourself. Inexpensive. Also on tubes already installed.

System advantage

Only **one** type of extractor tools for REMS Hurrigan H, REMS Hurrigan and REMS Twist/Hurrigan. Simple, inexpensive storage. No confusion possible.

Cost advantage

No costs for T-pieces, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety by fewer tube joints.

Design

Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head for exact drilling start without centre punching, drilling depth stop according to size of the T-outlet. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy gripping tongs for fixing the tool holder on the pipe, as an accessory.

Drill head drive

Drive with conventional electric drill.

Extractor tools

Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

Tool holder drive

With standard ratchet and hexagon socket 11 mm or with spanner. Upgrade to electric pipe neck expander by buying the REMS Twist/Hurrigan drive machine.



German Quality Product



Info



Supply format

REMS Hurrigan H Set. Hand tube extractor for hard and soft copper tubes \varnothing 10–22 mm, \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ " $s \leq 1.5$ mm. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for tubes in mm or inch. In sturdy case.

Description	Art.-No.
Set 12 + 15 + 18 + 22	151003
Set 12 + 14 + 16 + 18 + 22	151004
Set $\frac{3}{8}$ + $\frac{1}{2}$ + $\frac{5}{8}$ + $\frac{3}{4}$ + $\frac{7}{8}$ "	151005

Accessories

Description	Tubes \varnothing mm/inch	Art.-No.
Extractor tool	10	151105
	12	151110
	14	151120
	15	151125
	16	151130
	18	151140
	20	151145
	22	151150
	$\frac{3}{8}$ "	151155
	$\frac{1}{2}$ "	151160
	$\frac{5}{8}$ "	151165
	$\frac{3}{4}$ "	151170
	$\frac{7}{8}$ "	151175
REMS Twist/Hurrigan drive unit with stabiliser		151402
Grip wrench for clamping the tool holder		076117
Tool holder		151200
Drill head		151210
Dimpling pliers		151230
Ratchet $\frac{1}{2}$"		074021
Hexagon socket 11 mm		074041
Lubricant (tin)		151240
Case with inlay		151618



REMS Hurrigan

Electric tube extractor

Powerful, compact electric tool for efficient machining of T-branches of hard and soft tubes for tube installations without fittings.

Hard and soft copper tubes \varnothing 10–22 mm
 \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ "
 $s \leq 1.5$ mm

REMS Hurrigan – for making T-branches yourself. Inexpensive. Also on tubes already installed.

System advantage

Only one type of extractor tools for REMS Hurrigan H, REMS Hurrigan and REMS Twist/Hurrigan. Simple, inexpensive storage. No confusion possible.

Cost advantage

No costs for T-branches, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints.

Design

Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head provides precise drilling without punching with any standard power drill. Drill depth-stop according to the size of T-branch. Tool holder for holding the extractor tools. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy grip wrench for clamping the tool holder onto the pipe.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Handy, light, only 1.5 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed can be continuously controlled electronically by variable pressure on the safety switch from 0 to 1,000 rpm (accelerator switch).

Extractor tools

Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

REMS Twist/Hurrigan

Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage! See page 259.



German Quality Product



Info



Supply format

REMS Hurrigan Set. Electric tube extractor for hard and soft copper tube \varnothing 10–22 mm, \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ ", $s \leq .5$ mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 630 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Continuous, electronic speed control from 0 to 1,000 rpm (accelerator switch). Drive holder. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for pipes in mm or inch. In sturdy steel case.

Description	Art.-No.
Set 12 + 15 + 18 + 22	151000
Set 12 + 14 + 16 + 18 + 22	151010
Set $\frac{3}{8}$ + $\frac{1}{2}$ + $\frac{5}{8}$ + $\frac{3}{4}$ + $\frac{7}{8}$"	151002

Other voltages on request.



Accessories

Description	Tubes \varnothing mm/inch	Art.-No.
Extractor tool	10	151105
	12	151110
	14	151120
	15	151125
	16	151130
	18	151140
	20	151145
	22	151150
	$\frac{3}{8}$ "	151155
	$\frac{1}{2}$ "	151160
	$\frac{5}{8}$ "	151165
$\frac{3}{4}$ "	151170	
$\frac{7}{8}$ "	151175	
REMS Twist/Hurrigan drive unit with stabiliser		151402
Tool holder		151200
Drill head		151210
Dimpling pliers		151230
Lubricant (tin)		151240
Case with inlay		151618



Powerful, compact power tool for rational cold expanding of hard and soft copper pipes for pipe installation without fittings.

Hard and soft copper tubes	Ø 12 – 22 mm Ø 3/8 – 7/8" s ≤ 1 mm
----------------------------	--

REMS Twist – for making sockets yourself. Cold-expanding of hard copper pipes.

Cost advantage

No costs for annealing hard copper tubes, for deburring and cleaning, for fittings, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints. Using up tube pieces to make sockets.

Design

Compact, robust, job site-proven. Simple and fast working free-hand, at vice or workbench. No adjustments. Integrated clamping device provides safe support against torque in both directions.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Handly, light, only 1.5 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. The speed can be continuously controlled electronically by variable pressure on the safety switch from 0 to 1,000 rpm (accelerator switch).

Expander tools

One quick-changing expander tool of each tube size with rotating mandrel for easy expanding and smooth operation. Without annealing, standard socket in just a few seconds, extra long.

REMS Twist/Hurricane

Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage! See page 259.



German Quality Product



Supply format

REMS Twist Set. Electric tube expander for hard and soft copper tubes Ø 12 – 22 mm, Ø 3/8 – 7/8", s ≤ 1 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50 – 60 Hz, 630 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Continuous, electronic speed control from 0 to 1,000 rpm (accelerator switch). Drive holder. Lubricant. Expander tools for mm or inch. In sturdy steel case.


Description	Art.-No.
Set 12 + 15 + 18 + 22	156000
Set 12 + 14 + 16 + 18 + 22	156002
Set 3/8 + 1/2 + 5/8 + 3/4 + 7/8"	156004

Other voltages on request.

Accessories

Description	Tubes Ø mm/inch	Art.-No.
Expander tool	12	156150
	14	156200
	15	156225
	16	156250
	18	156300
	22	156350
	3/8"	156375
	1/2"	156400
	5/8"	156425
	3/4"	156450
7/8"	156475	
REMS Twist/Hurricane drive unit with stabiliser		151402
Lubricant (tin)		151240
Steel case with insert		151600



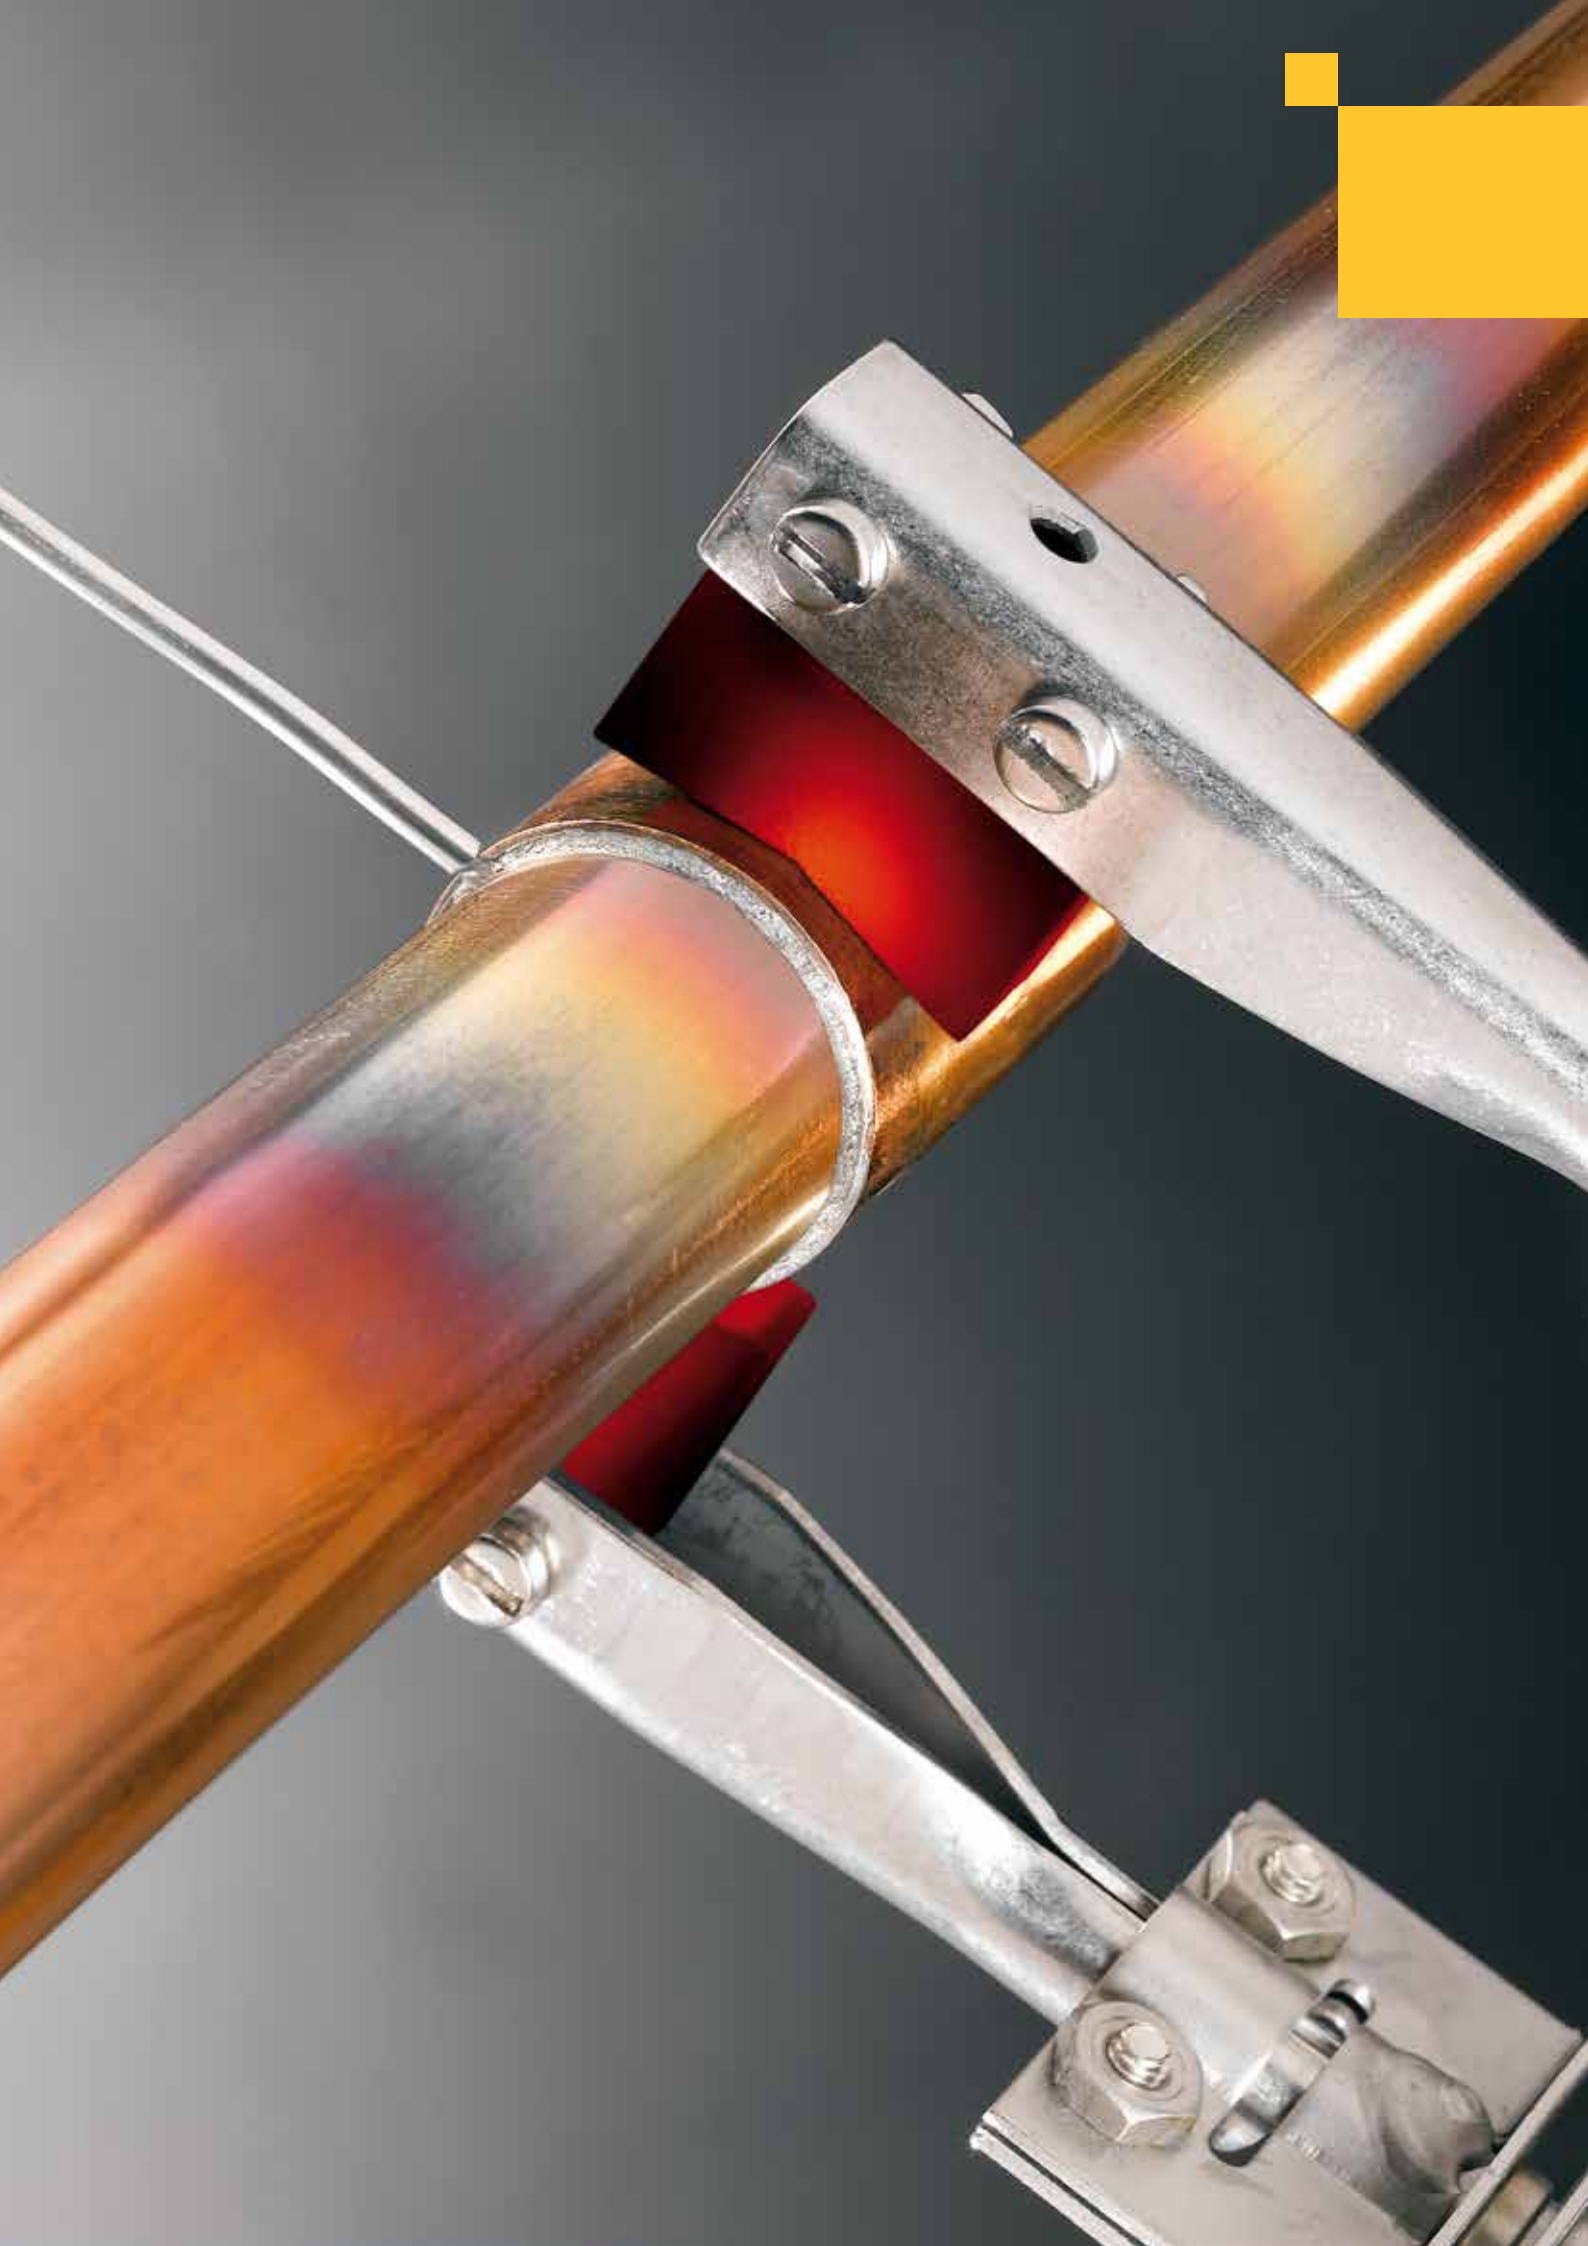

Soldering

	Cleaning pads	262
	Electric soldering pliers	262
	Electric soldering unit	263
	Turbo soldering torches	264
	Solder wire and solder paste	265

REMS Cu-Vlies

Cleaning pads

Metal-free, highly flexible cleaning pads for cleaning surfaces to be soldered on copper tubes and soldering fittings. Also for other materials.

REMS Cu-Vlies – clean surfaces according to DVGW.

Universal use, for many materials, highly flexible. Cleans metallic clear, dirt and oxide-free, according to DVGW work sheet GW 2. Clean finish. Multiple use, reusable by washing out, thus long service life. Can be used wet or dry.

Supply format

REMS Cu-Vlies. Metal-free, highly flexible cleaning pad for cleaning areas to be soldered on copper pipes and soldering fittings. Pack of 10.

	Art.-No.	
	160300	



German Quality Product

REMS Hot Dog 2

Electric soldering pliers

Efficient, light-weight electric tool for soft soldering. Directly connected to a socket, no transformer required. For trade and industry. For the building site and the workshop.

Copper tubes	Ø 10–28 mm Ø 3/8–1 1/8"
Heating capacity	800°C

REMS Hot Dog 2 – the smallest and most powerful soldering pliers. Super fast without flame.

Super fast soldering, e.g. Ø 18 mm in only 15 s. Enormous heating capacity up to 800°C through 2 heating cartridges. For permanent use.

Super light and handy, complete only 0.7 kg. Can be used anywhere, in confined areas also.



German Quality Product



Info

Supply format

REMS Hot Dog 2 Set. Electric soldering pliers for soft soldering copper tubes Ø 10–28 mm, Ø 3/8–1 1/8". 230 V, 50–60 Hz, 440 W. 250 g REMS Lot Cu 3 and REMS Paste Cu 3. Cleaning brush. In steel case with fire retarding insert.

	Art.-No.	
	163020	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS soldering material see page 265.		
Steel case with fire-proof inlay	163350	



REMS Contact 2000

Electric soldering unit

Compact, powerful electric tool for soft soldering. With safety transformer. For trade and industry. For the building site and the workshop.

Copper tubes	Ø 6–54 mm Ø ¼–2½"
Heating capacity	900°C (1650°F)

REMS Contact 2000 – the smallest, strongest and fastest unit of its kind. 2000 W soldering power. 4 m long soldering tongs cable.

Handy, compact. Favourable weight, small in size for work and transport. L x W x H: 210 x 150 x 140 mm.

Enormous heating capacity (900°C) ensures super-fast soldering. Rated power = Soldering capacity = 2000 W! Soldering time, e.g. for Ø 18 mm in only 18 s.

Can be used anywhere, with rod electrodes in tight spots also. Ready to solder any time, to be connected to a socket only. No adjustment of soldering current necessary. Wide work radius thanks to 4 m cable length. Flexible cable protector hose.

Indifferent to temperature influences electric control of soldering current.

Prisma-electrodes for universal use, maximum use through favorable seat. Rod-electrodes for working in tight spots. Electrode holders and bolts in stainless steel. Electrodes can be easily replaced.



Prisma-electrodes for universal use, maximum use through favorable seat.

German Quality Product



Info

Supply format

REMS Contact 2000. Electric soldering unit for soft soldering of copper tubes Ø 6–54 mm, Ø ¼–2½". 230 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length. Safety transformer, 2 prism electrodes. In a carton.

	Art.-No.	
	164011	

Other voltages on request.

Supply format

REMS Contact 2000 Super-Pack. Electric soldering unit for soft soldering of copper tubes Ø 6–54 mm, Ø ¼–2½". 230 V or 110 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length, safety transformer, 4 prism electrodes, 2 rod electrodes, 250 g quality soft solder REMS Lot Cu 3, 250 g quality soft solder paste REMS Paste Cu 3, 1 pipe cutter REMS RAS Cu-INOX 3-35, pack of 10 cleaning pads REMS Cu-Vlies. In sturdy steel case.

	Art.-No.	
	164050	



Accessories

Description	Art.-No.
Prism electrodes (pack of 2)	164111
Prism electrodes with holders (pack of 2)	164110
Rod electrodes (pack of 2)	164115
Steel case with insert	164250
REMS soldering material see page 265.	



REMS Blitz

Turbo soldering torch propane

Handy self-lighting torch with turbo-flame for fast soft soldering and economic gas consumption.

Copper tubes $\leq \varnothing 35 \text{ mm}$

Heating, annealing, burning, melting, thawing, shrinking and similar thermal procedures.

Flame temperature 1950°C (3500°F)

REMS Blitz – extremely fast soft soldering.

Piezo-electric self-lighting

Without igniter! Pull trigger – flame comes on! Release trigger – flame goes out! Little gas consumption, only 200 g/h!

Design

Super handy, ergonomic, with one hand only. No setting, no adjustment. Locking button for continuous operation. Only 1 universal flame tube. Small gas bottles can be used.

Turbo-flame

Spot-flame with turbo-twisting-booster for high heating capacity and super fast soft soldering.



German Quality Product



Info



Supply format

REMS Blitz. Turbo soldering torch propane for soft soldering of copper tubes $\leq \varnothing 35 \text{ mm}$. Piezo-electric self-lighting. Hose connector BSPP $\frac{3}{8}$ " LH. Hollow cap nut and socket BSPP $\frac{3}{8}$ " LH. In blister pack.

	Art.-No.	
	160010	

Accessories

Description	Art.-No.	
REMS soldering material see page 265.		
High pressure hose 3 m , BSPP $\frac{3}{8}$ " LH	152106	
Pressure reducer for 5 or 11 kg gas bottles (2 bar)	152109	



REMS Macho

Turbo soldering torch acetylene

Handy self-lighting torch with turbo-flame for extremely fast brazing and soft soldering. Economic gas consumption.

Copper tubes and others $\leq \varnothing 64 \text{ mm}$

Heating, annealing, burning, melting, thawing, shrinking and similar thermal procedures.

Flame temperature 2500°C

REMS Macho – super fast brazing.

Piezo-electric self-lighting

Without igniter! Pull trigger – flame comes on! Release trigger – flame goes out! Little gas consumption, only 360 g/h!

Acetylene only

Injection torch burns atmospheric oxygen. Hence only acetylene necessary.

Design

Super handy, ergonomic, with one hand only. No setting, no adjustment. Locking button for continuous operation. Only 1 universal flame tube.

Turbo-flame

Spot-flame with turbo-twisting-booster for extremely high heating capacity and super fast brazing.



German Quality Product



Info



Supply format

REMS Macho. Turbo soldering torch acetylene for brazing and soft soldering of copper tubes and others $\leq \varnothing 64 \text{ mm}$. Piezo-electric self-lighting. Hose connector BSPP $\frac{3}{8}$ " LH. Hollow cap nut and socket $\frac{3}{8}$ " LH. In blister pack.

	Art.-No.	
	161010	

Accessories

REMS soldering material see page 265.

REMS Lot Cu 3

Soft solder Sn97Cu3, ISO 9453:2014

Soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F).

In accordance with DVGW work sheet GW 2.

Alloy (weight %)	97 % Sn, 3 % Cu
Melting temperature	230 – 250°C (450 – 480°F)

REMS Lot Cu 3 – quality soft solder.

Lead-free, harmless to health and environment.
Silver-free, complies with standards. Very low price.

Supply format

REMS Lot Cu 3. 250-g spool soft solder wire Sn97Cu3, ISO 9453:2014, Ø 3 mm, for soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F).

	Art.-No.	
	160200	



German Quality Product

REMS Paste Cu 3

Soft solder paste of solder powder Sn97Cu3 according to ISO 9453:2014 and flux 3.1.1.C, EN 29454-1:1994

Soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F).

In accordance with DVGW work sheet GW 7 (DVGW-Reg.-Nr. DV-0101AT2244)

REMS Paste Cu 3 – quality soft solder paste.

Lead-free, harmless to health and environment.
Silver-free, complies with standards. Very low price.

No additional flux consumption, paste contains flux already.
Thus less danger of corrosion.

No overheating of tube and fitting because the melting of solder and the required temperature for soldering is clearly visible through the change of colour of paste.

High filling level of soldering joint, thereby good stability. Easy cleaning of remnants which are soluble in cold water.

Plastic bottle with brush integrated in cap which cannot get lost.

Supply format

REMS Paste Cu 3. 250-g soft solder paste of solder powder Sn97Cu3 according to ISO 9453:2014 and flux 3.1.1.C, EN 29454-1:1994, for soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F). DVGW approval mark. In plastic bottle with integrated brush.

	Art.-No.	
	160210	



German Quality Product

REMS Lot P6

Brazing solder ISO 17672-CuP 179

Brazing of copper tubes with copper, red copper cast and brass fittings in cold and hot water installation, gas installation, refrigerating and air conditioning applications.

In accordance with DVGW work sheet GW 2.

Alloy (weight %)	94 % Cu, 6 % P
Melting temperature	710 – 890°C (1310 – 1640°F)

REMS Lot P6 – quality brazing solder.

Universally applicable for almost all types of joints in copper pipe installations. Specially useful for capillary brazing joints of copper pipe installations without fittings. Wide melting range due to low phosphor content result in higher toughness of soldering joint.

Silver-free, complies with standards. Very low price.

Supply format

REMS Lot P6. 1 kg brazing solder (rods) ISO 17672-CuP 179, Ø 2 mm, for brazing of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, gas installation, refrigerating and air conditioning applications. In a carton.

	Art.-No.	
	160220	





Freezing



Pipe freezer CO₂

268



Electric pipe freezing unit

269

Simple, fast freezing of unemptied pipes with a carbon dioxide coolant. For repair, extensions of piping systems.

Steel, copper, plastic,
composite pipes

Ø 1/8 – 2"
Ø 10 – 60 mm

Refrigerant: carbon dioxide.

Refrigerating capacity to –79°C (–110°F).

Non toxic, non flammable.

REMS Eskimo – freezing instead of draining.
Super fast. Automatic refrigerant feed. High cooling capacity, e.g. 3/4" steel pipe in only 5 min.
Very small, indestructible freeze collars.

Refrigerant

Carbon dioxide coolant with high cooling performance up to –79°C. Non toxic. Non flammable. Easy to obtain.

Design

Tight contact between freeze collars and pipe and direct flow of the refrigerant onto the pipe ensure extremely short freezing times and economic refrigerant consumption. Freezing is possible on one or two sides, with additional T-distributors further freeze collars can also be connected.

Freeze collars

Easy. Rapid assembly, without special tools. Very small, highly flexible, indestructible freeze collars in cold-resistant thermoplastic elastomer, for operating even in the tightest spots. Clamping screws cannot get lost.

Handle piece with injector

Ergonomically designed handle pieces in plastic for comfortable operation. Unbreakable brass injector (injection nozzle). Fast and secure connection to freeze collars. No setting, the correct amount of refrigerant is automatically supplied.

High pressure hoses

Flexible, buckling-resistant and fractureproof high pressure hoses. Extra long for wide work radius. Extendable any time. Turnable hollow cap nut at bottle connector prevents high pressure hoses from tangling.



German Quality Product



Info



Supply format

REMS Eskimo Set. Pipe freezing device for carbon dioxide coolant. For steel, cast iron, lead, copper, plastic pipes Ø 1/8 – 2", Ø 10 – 60 mm. Two freezing jackets each in 10 different sizes for the whole working range, flange connection with T-junction, locking nut, 2 handles with injector, 2 high-pressure hoses. In sturdy carrying case.

	Art.-No.
	130002

Accessories

Description	Size	Art.-No.	
Freezing jacket	1/8"	10/12 mm	130450
	1/4"	15 mm	130455
	3/8"	18 mm	130460
	1/2"	22 mm	130465
	3/4"	28 mm	130470
	1"	35 mm	130475
	1 1/4"	42 mm	130480
	1 1/2"		130485
		54 mm	130490
		60 mm	130495
High-pressure hose 2 m		130415	
T-distributor for further collar		130207	
Bottle connection with T-distributor		130383	
Locking nut		130209	
Double nipple		130208	
Handle piece with injector		130410	
Case with inlay		130430	



REMS Frigo 2 F-Zero

Electric pipe freezing unit

Easy, fast freezing of pipes which are not drained.
Closed refrigerant circuit. Environmentally safe.
For repair and extension of piping systems.

Steel, copper, plastic,
composite pipes

Ø 1/8 – 2"
Ø 10 – 60 mm

REMS Frigo 2 F-Zero – electrically freezing instead of draining. Super fast up to 2". High cooling capacity, e.g. 3/4" steel pipe in only 9 min*. Particularly compact, patented deep-freezer heads, for very fast assembly. Temperature display with LCD digital thermometer.

System advantage

Only one pipe freezing unit for the complete working range up to 2". One-size freezer heads for the core working range Ø 1/4 – 1" / Ø 15 – 35 mm, no reducing inserts required. Aid the cooling process simply by spraying with water. Always clean freezer heads, no pastes/greases required.

Closed refrigerant circuit

Electric pipe freezing unit with closed refrigerant circuit. Environmentally safe. Can be used anywhere, also in closed rooms. Refrigerant R-290. High cooling capacity. Ideal also for longer repairs.

Design

Robust, compact. Very small deep-freezer heads fitted parallel to the pipe leaving refrigerant hoses for working in confined areas and niches also. Single or double freezing possible.

Cooling aggregate

Very quiet. Cooling aggregate, 430 W, in sturdy sheet metal housing with ventilating side openings for optimum air circulation. Large top compartment, easily accessible, for refrigerant hoses and accessories. Weighs only 23 kg. Easy to carry.

Deep-freezer heads

Very compact deep-freezer heads with special geometrically shaped cavities for seating different pipe diameters. Very small, only 50 mm wide. All pipe sizes from Ø 1/4 – 1" resp. Ø 15 – 35 mm can be frozen with only one deep-freezer head. Deep-freezer inserts for the rest of the capacity up to 2", 60 mm. Tightening straps for simple and quick assembly of deep-freezer heads onto the pipe, without tools.

Refrigerant hoses


Flexible, extra-long refrigerant hoses, 2.5 m long, in wear resistant, synthetic rubber for large work radius.

LCD-Digital-Thermometer

LCD digital thermometer with clip, for exact temperature display directly at the freezing points.



German Quality Product



Super fast up to 2"



Supply format

REMS Frigo 2 F-Zero Set. Electric pipe freezing unit with closed refrigerant circuit. For steel, copper, plastic, composite pipes, Ø 1/8 – 2", Ø 10 – 60 mm. Cooling aggregate 230 V or 110 V, 50 Hz, 430 W, 2 refrigerant hoses, 2.5 m long, 2 LCD digital thermometers, 2 tightening straps, squirt bottle. Equipped for Ø 1/4 – 1", 15 – 42 mm. In sturdy sheet metal housing. In a carton.

	Art.-No.	
	131012	

Accessories

Description	Size	Art.-No.	
Extension kit up to 2", 60 mm	1 1/2 – 2" / 54 – 60 mm	131160	
Deep-freeze inserts (pack of 2)	1/8"	10, 12 mm	131110
	1/2"		131156
		54 mm	131157
		60 mm	131158
Clamping band		131104	
LCD digital thermometer		131116	



*ambient/water temperature approx. 18°C.



REMS CamSys 2

2022-01-01 12:24:48PM

10 m

X 1.0

Pipe and Drain inspection

Pipe and Drain cleaning

	Endoscope cameras	272
	Electronic camera inspection systems	274
	Drain cleaner for manual and electric operation	280
	Electric drain cleaning machine	281
	Cordless drain cleaning machine	282
	Electric pipe and drain cleaning machines	284

Mobile, handy endoscope camera for low-cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. For cordless operation.

Camera head Ø 8 mm

REMS MiniScope – Brilliant pictures of cavities, shafts and pipes.

Design

Ultra light and handy. Controller unit with camera cable set only 0.4 kg. Can be used everywhere, free hand, over head, also in very confined spaces. Sturdy, impact-proof plastic housing with ergonomically shaped handle. The buttons are located directly underneath the display so that it is possible to hold the device by the handle and operate the buttons with one hand. On/Off button, button for rotating, mirroring of the image by 180° respectively, button for regulating the brightness of the LEDs in the camera head in 8 stages, button for regulating the brightness of the colour display in 8 stages. Power LED for indicating the operating state. Battery compartment for 4 commercially available 1.5V, AA, LR6 batteries. Plug-screw connections for changing the camera cable set without tools. Sturdy case for controller unit, camera cable set 8-1 and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 2.3" colour display with state of the art TFT-LCD technology for brilliant pictures, 320 × 240 pixels.

Battery operation

Controller unit with four 1.5V, AA, LR6 batteries for approx. 6 hours of continuous operation.

Exchangeable camera cable set Color

Camera cable set Color, consisting of colour camera Ø 8 mm (640 × 480 pixels), with CMOS sensor, with dimmable white light LEDs for optimum setting of the brightness and fixed focus function, for automatic picture focus, protected against occasional immersion in water (IP 67). Camera cable set Color 8-1 with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet.



Info

Supply format

REMS MiniScope Set. Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Controller unit with 2.3" TFT-LCD colour display. 4 batteries 1.5 V, AA, LR6. Camera cable set Color 8-1 with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. In sturdy case.

	Art.-No.	
	175401	



REMS CamScope HD

Endoscope camera

Mobile, handy endoscope camera for low-cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. Documentation of photos and videos on MicroSD card. For battery and mains operation.

Camera head Ø 8 mm

REMS CamScope HD – Brilliant pictures and videos of cavities, shafts and pipes in HD quality (1920 × 1080 pixels). MicroSD card slot.

Design

Ultra light and handy. Controller unit with pistol grip and camera cable set only 0.5 kg. Can be used everywhere, free hand, over head, also in very confined spaces. Sturdy, impact-proof plastic housing with ergonomically shaped handle. The buttons are located directly underneath the display so that it is possible to hold the device by the pistol grip and operate the buttons with one hand. Bottoms, among other things, for regulating the brightness of the LEDs in the camera head and the display in 4 stages each, for rotating, mirroring and zooming the image shown in the display, calling and navigating in the menu. Power LED for indicating the operating state integrated into the On-Off button. Li-Ion 3.7 V battery with 4.0 Ah for long service life. Different HD camera cable sets can be used. Plug-screw connections for changing the camera cable sets without tools. Sturdy case of controller unit with pistol grip, camera cable set Color 8-1 HD, USB cable and accessories.

Controller unit with TFT-LCD colour display

Controller unit with pistol grip with 5" colour display with state-of-the-art TFT-LCD technology and 480 × 854 pixels, for brilliant pictures and videos. Selectable menu language. MicroSD card slot. Pictures and videos in HD quality can be saved on a MicroSD card for simple documentation of the inspection result. 4x digital zoom. The date and time of the recording can be saved in the photo and video as an option. Immediate playback of saved recordings or transmission to other devices via MicroSD card. USB port for direct connection to a PC or laptop and for charging the battery.

Cordless and mains operation

Li-Ion technology. Controller unit with pistol grip with integrated 3.7 V, 4.0 Ah Li-Ion battery. Light and powerful. High energy density for approx. 5 hours continuous operation. The unit can be used in mains mode whilst charging the battery with the USB cable. No memory effect for maximum battery performance.

Exchangeable camera cable set Color

Camera cable set Color HD, consisting of colour camera Ø 8 mm, with CMOS sensor, with dimmable white light LEDs for optimum setting of the brightness and fixed focus function, for automatic picture focus, protected against occasional immersion in water (IP 67). Camera cable set Color 8-1 HD with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. Camera cable set Color 8-5 HD with 5 m flexible push cable as an accessory.



Info



Supply format

REMS CamScope HD Set. Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Documentation of pictures and videos in HD quality on MicroSD card. Endoscope camera with 5" TFT-LCD colour display, 4x digital zoom, MicroSD card slot, USB port, integrated 3.7 V, 4.0 Ah Li-ion battery. Camera cable set Color 8-1 HD with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. 32 GB MicroSD card. USB cable. In sturdy case.

	Art.-No.	
	175400	

Accessories

Description	Art.-No.	
Camera cable set Color 8-5 HD , colour camera Ø 8 mm, 1280 × 720 pixels, with 5 m formable push cable	175440	



Mobile, handy camera inspection system for inexpensive inspection and damage analysis of pipes, drains, chimneys and other hollow cavities. With electronic metering. Also for inspection after pipe cleaning work and for acceptance of new installations or repairs. Documentation of pictures and videos on SD card. For battery and corded operation.

Camera head	Ø 25 mm
Pipe	Ø (40) 50–150 mm
Drains, chimneys, other cavities	

REMS CamSys – Brilliant pictures and videos of pipes and drains. SD card slot. Electronic metering. Cordless and mains operation.

System advantage

Only **one** controller unit with TFT-LCD colour display for connecting different camera cable sets for different requirements. Therefore inexpensive conversion possible.

Design

Mobile, handy, light. Can be used everywhere, even in very narrow places. Controller unit connected to the camera cable set by a 2 m connecting cable, removable for easy cleaning of the camera cable set. Various camera cable sets can be used. Plug-screw connections for changing the camera cable sets and the controller unit without tools. Sturdy case for controller unit, voltage supply/charger and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 3.5" colour display with state of the art TFT-LCD technology for brilliant pictures and videos, 89 mm screen diagonal, 320 x 240 pixels. Very light and handy, only 0.4 kg. Sturdy, impact-proof plastic housing, spray protected. Small dimensions: 172 x 121 x 58 mm. Keys for setting the brightness of the LEDs of the colour camera head. Full screen, 2x zoom, 4x rotation options for the picture. SD card slot. Pictures and videos can be saved on an SD card for simple documentation of the inspection result. Insertion depth of the camera is stored in the picture and the video, optionally also date and time of the recording. Pictures can be taken during video recording without impairing the video recording. Immediate playback of saved recordings or transmission to other devices with SD card. Pictures can also be taken later from the video during playback of recorded videos on the controller's colour display. USB connector for direct connection to PC or laptop. Video output socket Composite-Video PAL/NTSC for connecting an external monitor. Connection for voltage supply/charger Li-Polymer 100–240 V.

Cordless and mains operation

Li-Polymer Technology. Controller unit with integrated Li-Polymer battery 3.7V, 4.0 Ah. Light and powerful. Power supply/charger 100–240 V, 15 W, with USB port and USB cable for connecting power supply/charger, laptop or other voltage supply. No memory effect for maximum battery performance.

High resolution special colour camera

High resolution special colour camera Ø 25 mm with CMOS image sensor and 8 ultra bright, white LEDs with adjustable light intensity up to 1700 mcd and concentrated radiation angle for brilliant colour pictures with even illumination. Low light requirement due to very high light sensitivity (0.1 lux). Fixed focus and special lens with 90° wide angle, also for detecting the smallest details.

Exchangeable cable camera sets

Camera cable sets S-Color, consisting of special high-resolution colour camera with optional **30 m push cable Ø 5.4 mm**, flexible, for Ø 50–150 mm, in hasp with electronic metre counter, **20 m push cable Ø 4.5 mm**, very flexible, for small pipe diameters and narrower bends Ø (40) 50–150 mm, in the hasp with electronic metre counter or **10 m push cable Ø 4.5 mm** with length mark, very flexible, for small pipe diameters and narrower pipe bends Ø (40) 50–150 mm, in the cable reel, with connection for controller unit. Very small, rounded camera head Ø 25 mm, water-tight up to 20 m (0.2 MPa/2 bar/29 psi) and highly flexible sliding spring tapered towards the push cable for effortless feeding even through several pipe bends. Camera head with strong, quick-change protective cap with inserted mineral glass pane. Bend-manoeuvring push cable in hybrid technology, with glass fibre core, data cables and plastic sheath, very stable, for long life. Robust, powder-coated, easy to clean cable cage. Hasp with rotary cage for simple unwinding and winding of the push cable and integrated sensor for electronic metering. Carrying case for camera cable set as an accessory.

Guide bodies

Various guide bodies for larger pipe diameters, firmly lockable on the camera head, as an accessory.



Info

Supply format

REMS CamSys Set S-Color. Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos on SD card with specification of date and time. Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 4.0 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 15 W, SD card 4 GB, USB cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera Ø 25 mm with CMOS image sensor and push cable.

Description	Version	Art.-No.	
Set S-Color 10 K	10 m push cable Ø 4.5 mm with length mark, very flexible, in cable reel. For small pipe diameters and narrower pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.	175008	
Set S-Color 20 H	20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metre counter. For small pipe diameters and narrower pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.	175007	
Set S-Color 30 H	30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metre counter. For pipes Ø 50–150 mm, drains, shafts, stacks and other cavities.	175010	



Accessories

Description	Art.-No.	
REMS CamSys Basic-Pack. Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 4.0 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 15 W, SD card 4 GB, USB cable, in sturdy case.	175000	
Camera cable set S-Color 10 K with high resolution special colour camera Ø 25 mm with CMOS image sensor, 10 m push cable Ø 4.5 mm with length marking, very flexible, with connection for controller unit, in cable reel. For small diameters and narrower pipe bends Ø (40) 50–150 mm.	175305	
Camera cable set S-Color 20 H with high resolution special colour camera Ø 25 mm with CMOS image sensor and 20 m push cable Ø 4.5 mm, flexible, in the hasp with electronic metering and connection for controller unit. For small diameters and narrower pipe bends Ø (40) 50–150 mm.	175306	
Camera cable set S-Color 30 H with high resolution special colour camera Ø 25 mm with CMOS image sensor and 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering and connection for controller unit. For Ø 50–150 mm.	175011	
Guide body Ø 62 mm S-Color/S-Color S, for camera cable set S-Color/S-Color S	175057	
Guide body Ø 100 mm S-Color/S-Color S, for camera cable set S-Color/S-Color S	175058	
Protective cap S-Color/S-Color S with mineral glass pane, sealing ring, for camera cable set S-Color/S-Color S	175026	
Carrying case for camera cable set	175123	
Case with inlay	175018	



Mobile, handy camera inspection system for inexpensive inspection and damage analysis of pipes, drains, chimneys and other hollow cavities. Self-levelling camera. Transmitter for localising camera heads. Electronic metering. Also for inspection after pipe cleaning work and for acceptance of new installations or repairs. Documentation of pictures and videos with voice recording on SD card. For battery and corded operation.

Camera head S-Color/S-Color S	Ø 25 mm
Camera head S-Color S-N	Ø 33 mm
Pipes, drains, chimneys, other cavities	
Camera head S-Color	Ø (40) 50 – 150 mm
Camera head S-Color S	Ø 50 – 150 mm
Camera head S-Color S-N	Ø 70 – 150 mm

REMS CamSys 2 – Brilliant pictures and videos of pipes and drains. Voice recording Self-levelling camera. Transmitter for localising camera heads. SD card slot. Electronic metering. Cordless and mains operation.

System advantage

Only **one** controller unit with TFT-LCD colour display for connecting different camera cable sets for different requirements. Therefore inexpensive conversion possible.

Design

Mobile, handy, light. Can be used everywhere, even in very narrow places. Controller unit connected to the camera cable set by a 2 m connecting cable, removable for easy cleaning of the camera cable set. Various camera cable sets can be used. Plug-screw connections for changing the camera cable sets and the controller unit without tools. Sturdy case for controller unit, voltage supply/charger and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 7" colour display with state of the art TFT-LCD technology for brilliant pictures and videos, 178 mm screen diagonal, 720 x 480 pixels. Very light and handy, only 1.3 kg. Sturdy, impact-proof plastic housing, spray protected, glare protection. Integrated stand for different angles of inclination of the screen. Ergonomic grips with soft-grip and adjustable clamping bands, keys for picture and video, for one-hand operation by right and left handers. Small dimensions: 270 x 164 x 70 mm. Keys for setting the brightness of the LEDs of the colour camera head. Full screen, 2x zoom, 4x rotation options for the picture. Adjustable automatic switch-off. SD card slot. Pictures and videos with voice recording can be saved on an SD card for simple documentation of the inspection result. Insertion depth of the camera is stored in the picture and the video, optionally also date and time of the recording. Pictures can be taken during video recording without impairing the video recording. Immediate playback of saved recordings or transmission to other devices with SD card. Pictures can also be taken later from the video during playback of recorded videos on the controller's colour display. USB connector for direct connection to PC or laptop. Video output socket Composite-Video PAL/NTSC for connecting an external monitor. Connection for voltage supply/charger 100 – 240 V.

Cordless and mains operation

Li-Polymer Technology. Controller unit with integrated Li-Polymer battery 3.7V, 7.6 Ah. Light and powerful. Power supply/charger 100 – 240 V, 15 W, with USB port and USB cable for connecting power supply/charger, laptop or other voltage supply. No memory effect for maximum battery performance.

High resolution special colour camera

High resolution special colour camera with CMOS image sensor and ultra bright, white light emitting diodes (LEDs) with adjustable light intensity up to 1700 mcd and concentrated radiation angle for brilliant colour pictures with evenly bright illumination. Low light requirement due to very high light sensitivity (0.1 lux). Fixed focus and special lens with 90° wide angle, also for detecting the smallest details.



Info

Exchangeable cable camera sets

Camera cable set S-Color, consisting of a special high resolution colour camera Ø 25 mm with 20 m push cable Ø 4.5 mm, very flexible, for small pipe diameters and narrower bends Ø (40) 50 – 150 mm, in the hasp with electronic metering or 10 m push cable Ø 4.5 mm with length mark, very flexible, for small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, in the cable reel. **Camera cable set S-Color S**, consisting of a special high resolution colour camera Ø 25 mm with 30 m push cable Ø 5.4 mm, flexible, for Ø 50 – 150 mm, in the hasp with electronic metering and 33 kHz transmitter for localising the camera head. **Camera cable set S-Color S-N**, consisting of a special high resolution colour camera Ø 33 mm with 30 m push cable Ø 5.4 mm, flexible, for Ø 70 – 150 mm, in the hasp with electronic metering, 33 kHz transmitter for localising the camera head and self-levelling camera for upright pictures and videos. Connection for controller unit. Very small, rounded camera head, water-proof up to 20 m (0.2 MPa/2 bar/29 psi) and highly flexible sliding spring tapered towards the push cable for effortless feeding even through several pipe bends. Camera head with strong, quick-change protective cap with inserted mineral glass pane. Bend-manoeuvring push cable in hybrid technology, with glass fibre core, data cables and plastic sheath, very stable, for long life. Robust, powder-coated, easy to clean cable cage. Hasp with rotary cage for simple unwinding and winding of the push cable and integrated sensor for electronic metering. Carrying case for camera cable set as an accessory.

Guide bodies

Guide body S-Color/S-Color S and S-Color S-N Ø 62 mm and Ø 100 mm, for greater pipe diameters, can be locked to camera head S-Color/S-Color S or S-Color S-N, as an accessory.

Tracker

REMS Explorer for localising a camera head with a 33 kHz transmitter, for determining the position of damages or the course of a pipe, as an accessory.



Supply format

REMS CamSys 2 Set S-Color. Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos with voice recording on SD card with specification of date and time. Controller unit in microprocessor technology with 7" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery 3.7V, 7.6 Ah, in sturdy, impact-proof plastic housing, spray protected, glare protection, stand. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100 – 240V, 50 – 60 Hz, 15 W, SD card 4 GB, USB cable, video cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera with CMOS image sensor and push cable.

Description	Version	Art.-No.	
Set S-Color 10 K	High resolution special colour camera Ø 25 mm, 10 m push cable Ø 4.5 mm with length mark, very flexible, in the cable reel. For small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, drains, shafts, stacks and other cavities.	175301	
Set S-Color 20 H	High resolution special colour camera Ø 25 mm, 20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metering. For small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, drains, shafts, stacks and other cavities.	175302	
Set S-Color S 30 H	High resolution special colour camera Ø 25 mm, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 50 – 150 mm, drains, shafts, stacks and other cavities.	175303	
Set S-Color S-N 30 H	High resolution special colour camera Ø 33 mm, self-levelling, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 70 – 150 mm, drains, shafts, stacks and other cavities.	175304	



Description	Art.-No.	
REMS CamSys 2 Basic-Pack Controller unit in microprocessor technology with 7" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 7.6 Ah, in sturdy, impact-proof plastic housing, glare protection, stand, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 15 W, SD card 4 GB, USB cable, video cable, in sturdy case.	175300	
Camera cable set S-Color 10 K High resolution special colour camera Ø 25 mm, 10 m push cable Ø 4.5 mm with length mark, very flexible, in the cable reel. For small diameters and narrower pipe bends Ø (40) 50–150 mm.	175305	
Camera cable set S-Color 20 H High resolution special colour camera Ø 25 mm, 20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metering. For small diameters and narrower pipe bends Ø (40) 50–150 mm.	175306	
Camera cable set S-Color S 30 H High resolution special colour camera Ø 25 mm, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For Ø 50–150 mm.	175307	
Camera cable set S-Color S-N 30 H High resolution special colour camera Ø 33 mm, self-levelling, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For Ø 70–150 mm.	175308	
Guide body Ø 62 mm S-Color/S-Color S, for camera head S-Color/S-Color S	175057	
Guide body Ø 100 mm S-Color/S-Color S, for camera head S-Color/S-Color S	175058	
Guide body Ø 62 mm S-Color S-N, for camera head S-Color S-N	175343	
Guide body Ø 100 mm S-Color S-N, for camera head S-Color S-N	175339	
Protective cap S-Color/S-Color S with mineral glass pane, sealing ring, for camera head S-Color/S-Color S	175026	
Protective cap S-Color S-N with mineral glass pane, sealing ring, for camera head S-Color S-N	175330	
REMS Explorer, tracker for localising a camera head with a 33 kHz transmitter	175312	
Carrying case for camera cable set	175123	
Case with inlay	175323	





REMS Pull-Push

Suction and pressure cleaning device

Proven, reliable suction and pressure cleaning device for fast clearance of blockages.

REMS Pull-Push – fast clearance of blockages.

High pressing force by front, adjustable handle.
Optimum adaptation to the cleaning task by 2 sleeves:
Short sleeve for wash basins and baths, long sleeve for toilets.



Info



Supply format

REMS Pull-Push. Suction and pressure cleaning device for fast clearance of blockages. With short and long sleeve. In a box.

	Art.-No.	
	170300	

REMS Mini-Cobra

Drain cleaner for manual and electric operation

Proven, handy device for the fast unblocking of pipes, e.g. for kitchens, bathrooms and toilets.

For pipes \varnothing 20 – 50 (75) mm
For drain cleaning cables \varnothing 6, 8, 10 mm

REMS Mini-Cobra – by hand or electric. Indispensable to remove small blockages.

Design

Simple, robust, practical design. Handy, light. Only 2.9 kg. Easy operation also in traps and tight bends. Easy insertion of cable directly through strainers in sinks and drains. Locking of cable by quick-action chuck.

Drain cleaning cables

Cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight bends. Cable end with bulbous head (sink strainer head), thus easy to bend.

Cable drum

In hot-galvanized spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head. Corrosion-resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View to cable at all times.

Drive

By hand with easy action, easy grip crank handle or with suitable electric drill/with suitable electric screwdriver, speed \leq 300 rpm. Hexagon adapter for electric drive located in the drum cover.



German Quality Product



Info



Supply format

REMS Mini-Cobra. Pipe cleaning device for pipes \varnothing 20 – 50 (75) mm, with crank handle and hexagonal driver for electric drill/screwdriver. For drain cleaning cables \varnothing 6, 8 and 10 mm. Cable drum in shock-proof, glass-fibre reinforced plastic. Quick-action chuck. Cable \varnothing 8 mm \times 7.5 m long. In a carton.

	Art.-No.	
	170010	

Accessories

Description	\varnothing \times Length	Art.-No.
Drain cleaning cable	8 mm \times 7.5 m	170200
	10 mm \times 10 m	170205
Drain cleaning cable with core	8 mm \times 7.5 m	170201



REMS Mini-Cobra S

Electric drain cleaning machine

Electric pipe cleaning device with fast switchover.
For effortless and quick application to remove pipe blockages in kitchen, bath, toilet.

For pipes \varnothing 20 – 50 (75) mm
For drain cleaning cables \varnothing 8, 10 mm

REMS Mini-Cobra S – Fast clearance of pipe blockages. Ultra fast reversal of direction of spiral feed/return by fast switchover.

Design

Compact unit of drive machine and cable drum. Handy, light. Only 5.7 kg. Combined thrust and grip handle for controlling the automatic feed-forward and reverse and for safe holding of the unit. Easy operation also in traps and tight bends.

Fast switchover

For easy operation and fast clearance of pipe blockages. Ultra fast reversal of direction of spiral feed/return by fast switchover (**Patent EP 3 059 022**) also under full load without changing the motor's direction of rotation, avoids looping of the drain cleaning cables when suddenly encountering resistance from pipe blockages, for long life of the drain cleaning cables.

Drain cleaning cables

Drain cleaning cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head (sink strainer head), thus easy to bend. Drain cleaning cables with core in high quality spring steel prevents ingress of dirt and generation of long fibres in the cable windings.

Cable drum

Corrosion resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View of the cable at any time.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed between 0 and 950 rpm is controlled by pressing the tip switch steplessly (acceleration switch).



German Quality Product



Info



Patent EP 3 059 022

Supply format

REMS Mini-Cobra S. Electric pipe cleaning device with fast switchover, for pipes \varnothing 20 – 50 (75) mm. For drain cleaning cables \varnothing 8 and 10 mm. Drive unit with maintenance-free gear, universal motor 230 V or 110 V, 50 – 60 Hz, 630 W, high-torque forward and reverse at low speed. Safety tip switch. Stepless, electronic speed control (acceleration switch) between 0 and 950 rpm. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable \varnothing 8 mm, with core, 7.5 m long.

Description	Art.-No.
REMS Mini-Cobra S , in a carton	170022
REMS Mini-Cobra S Set , in sturdy steel case.	170023



Accessories

Description	\varnothing × Length	Art.-No.
Drain cleaning cable with core	8 mm × 7.5 m	170201
Drain cleaning cable	10 mm × 10 m	170205
Steel case		185058



Mobile, handy, cordless pipe cleaning device with fast switchover. For effortless and quick application to remove pipe blockages in kitchen, bath, toilet. Li-Ion 22V Technology. For battery and corded operation.

For pipes	Ø 20 – 50 (75) mm
For drain cleaning cables	Ø 8, 10 mm

REMS Mini-Cobra S 22V VE – fast clearance of pipe blockages anywhere. Ultra fast reversal of direction of spiral feed/return by fast switchover. With powerful, brushless battery motor.

Design

Compact unit of cordless drive unit and spiral drum. Mobile, handy, light. Complete with battery pack only 5.2 kg. Combined thrust and grip handle for controlling the automatic feed-forward and reverse and for safe holding of the unit. Easy operation also in traps and tight bends. Integrated LED work light for illuminating the work place.

Fast switchover

For easy operation and fast clearance of pipe blockages. Ultra fast reversal of direction of spiral feed/return by fast switchover (**Patent EP 3 059 022**) also under full load without changing the motor's direction of rotation, avoids looping of the drain cleaning cables when suddenly encountering resistance from pipe blockages, for long life of the drain cleaning cables.

Drain cleaning cables

Drain cleaning cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head (sink strainer head), thus easy to bend. Drain cleaning cables with core in high quality spring steel prevents ingress of dirt and generation of long fibres in the cable windings.

Cable drum

Corrosion resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View of the cable at any time.

Drive

High-performance electro-mechanical drive with powerful, brushless motor 21.6V, 500 W output, extra torque powerful left and right hand rotation at specially adapted speed, robust, precision ball bearing-mounted gear, maintenance-free. Safety switch, electronically controlled for jolt-free switching on and off. Continuous, electronic speed control. The speed can be continuously controlled by variable pressure on the safety switch from 0 to 560 rpm (accelerator switch /VE).

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 1.5, 4.4, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. 220–240V/21.6V, 15A output, voltage supply for mains operation instead of Li-Ion battery 21.6V, as accessory.



German Quality Product



Info



Patent EP 3 059 022



Supply format

REMS Mini-Cobra S 22 V VE. Cordless pipe cleaning device with fast switchover, for pipes \varnothing 20–50 (75) mm. For drain cleaning cables \varnothing 8 and 10 mm. Drive unit with powerful, brushless battery motor 21.6 V, 500 W, maintenance-free, robust gear, extra torque powerful left and right hand rotation at low speeds, safety switch. Continuous, electronic speed control (accelerator switch (VE)) from 0 to 560 rpm. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240 V, 50–60 Hz, 70 W. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable \varnothing 8 mm, with core, 7.5 m long.

Description	Art.-No.
REMS Mini-Cobra S 22 V VE, in a carton	170025
REMS Mini-Cobra S 22 V VE Set, in sturdy steel case	170026

Other voltages on request.

Accessories

Description	$\varnothing \times$ Length	Art.-No.
Drain cleaning cable with core	8 mm \times 7.5 m	170201
Drain cleaning cable	10 mm \times 10 m	170205
Battery Li-Ion 21.6 V, 2.5 Ah		571571
Battery Li-Ion 21.6 V, 4.4 Ah		571574
Battery Li-Ion 21.6 V, 5.0 Ah		571581
Battery Li-Ion 21.6 V, 9.0 Ah		571583
Rapid charger 100–240 V, 50–60 Hz, 90 W		571585
Rapid charger 100–240 V, 50–60 Hz, 290 W		571587
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A, for mains operation instead of battery Li-Ion 21.6 V.		571567
Steel case with inlay		170107

REMS Lumen 2800 22V, cordless LED flood light, see page 111



REMS Cobra 22/32

Electric pipe and drain cleaning machines

Handy, robust, compact machines for versatile use in pipe and drain cleaning. High-speed rotator with connectable cable sections. Proven technology.

For pipes	Ø 20 – 250 mm
For pipe and drain cleaning cables	Ø 8, 16, 22, 32 mm

All pipe and drain cleaning cables and tools can also be used for other makes.

REMS Cobra – clear pipe – easy and fast.

High-speed rotator with cable sections for work length up to 100 m. Effective chain knocking and milling up to 740 rpm. Closed drive spindle protects motor and drive against dirt and water.

High speed rotator with connectable cable sections

High-speed rotator, 740 rpm (REMS Cobra 22) resp. 520 rpm (REMS Cobra 32), with cable sections for effective fast operation, e.g. during chain knocking or milling. Under difficult conditions also, e.g. roots and hard incrustations. Cable sections to be connected as needed up to 70 m (REMS Cobra 22) resp. 100 m (REMS Cobra 32) work length. No unnecessary rotating of long pipe and drain cleaning cables.

Design

Robust, practical, splash-proof. Maintenance-free. Small in size. Favourable weight, drive unit REMS Cobra 22 only 19 kg, drive unit REMS Cobra 32 only 24 kg. Machine frame made of distortion-free cast aluminium with protective covers in shock-proof plastic material. REMS Cobra 22 with holders for part spirals 16 and 22 for fixing the part spirals to the machine frame when changing spirals. Chucking system which is located outside the machine housing with straight through undivided drive spindle for the pipe and drain cleaning cable. This enables a complete seal of the machine interior against dirt and water. Connecting cable with integrated personal protection switch (PRCD). Guide hose prevents excess rotation of pipe and drain cleaning cables and pollution of the environment. Legs with rubber caps guarantee a safe, floor-protecting stand.

High-performance pipe and drain cleaning cables

Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Rapid action coupling for fast extension and shortening. T-groove coupling with safety lock through spring-loaded thrust pin. Manual feed-forward for sensitive operation. Standard pipe and drain cleaning cable for universal pipe and drain cleaning jobs, highly flexible, specially suited for tight or several consecutive pipe bends. Pipe and drain cleaning cable S with thicker special spring steel for very difficult to remove obstructions, e.g. root cutting. Drain cleaning cables with weather-proof and temperature resistant plastic core prevents drain cleaning cable from dirt and generation of long fibres in the cable windings. Drive through REMS Cobra 22, REMS Cobra 32 or drive machines of other makes.

Clamping jaws for cable drive

Clamping jaws in high-grade hardened steel, resistant to wear and precise fit. Instant and exact clamping and opening of pipe and drain cleaning cables allow optimum control, power transmission and operating safety. REMS Cobra 22: Choice of pipe and drain cleaning cables Ø 16 mm and 22 mm, without changing the clamping jaws. Pipe and drain cleaning cable Ø 8 mm with adapter drum 22/8 and integrated clamping jaws, as accessory. REMS Cobra 32: Choice of drain cleaning cables Ø 22 and 32 mm, without changing the clamping jaws. Drain cleaning cables Ø 16 mm with clamping jaws 16, as accessory. Pipe and drain cleaning cable Ø 8 mm with adapter drum 32/8 and integrated clamping jaws, as accessory.

Drive


Powerful, quiet running capacitor motor with high torque, 750 W (REMS Cobra 22), 1050 W (REMS Cobra 32), right and left-hand rotation. Full transmission of motor power by a slipping-proof maintenance-free toothed belt drive. Straight through closed drive spindle. Permanently lubricated, maintenance-free roller bearings. Fast and secure run and stop of pipe and drain cleaning cable through strong, centrally located pressing lever provides central power input. Lever doubles as a carrying device without awkward locking.

Pipe and drain cleaning tools

Large variety of pipe and drain cleaning tools (page 286 – 287), also fit into pipe and drain cleaning machines of other makes.



German Quality Product

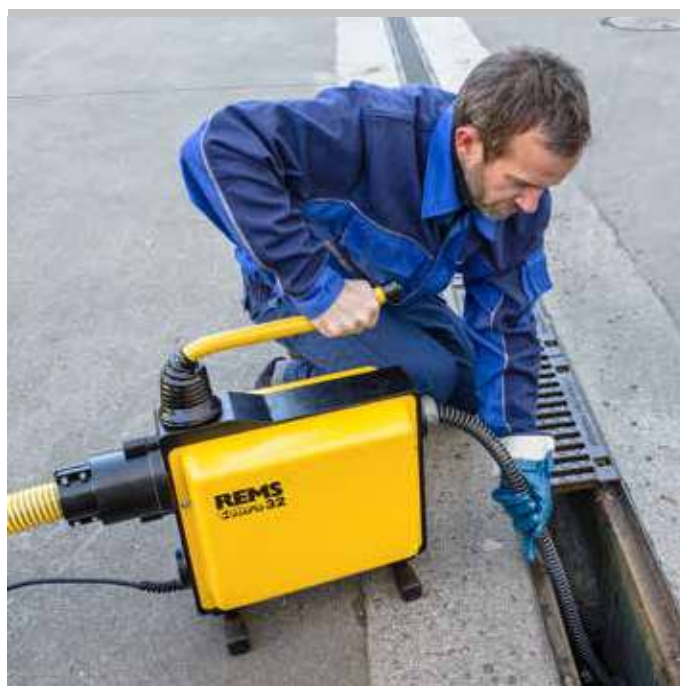

German Quality Product



Straight through closed drive spindle protects motor and drive against dirt and water.

Supply format

REMS Cobra 22 Set. Electric pipe and drain cleaning machine for pipes Ø 20–150 mm. Drive unit with maintenance-free belt drive, capacitor motor 230 V, 50 Hz, 750 W, right and left-hand rotation, guide hose. Personal protection switch (PRCD). Choice of cable and tool set 16 or/and 22. In a carton.

Description	Version	Art.-No.
Set 16	5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 1 pair of guide gloves, steel case for tool set	172010
Set 22	5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 1 pair of guide gloves, steel case for tool set	172011
Set 16 + 22	5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 2 pairs of guide gloves, steel case for each tool set	172012



Supply format

REMS Cobra 32 Set. Electric pipe and drain cleaning machine for pipes Ø 20–250 mm (½–10"). Drive unit with maintenance-free belt drive, capacitor motor 230 V, 50 Hz, 1050 W, right and left-hand rotation, guide hose. Personal protection switch (PRCD). Choice of cable and tool set 32 or cable and tool sets 22 and 32 or 16 and 22. In a carton.

Description	Version	Art.-No.
Set 32	4 cable sections 32 × 4.5 m in cable carrier, straight auger 32, retrieving auger 32, funnel auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32, 1 pair of guide gloves, case for tool set	174010
Set 22 + 32	5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 4 cable sections 32 × 4.5 m in cable carrier, straight auger 32, retrieving auger 32, funnel auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32. 2 pairs of guide gloves, steel case/case for each tool set	174011
Set 16 + 22	5 cable sections 16 × 2.3 m in cable carrier, 2 clamping jaws 16, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator 16, 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 2 pairs of guide gloves, steel case for each tool set	174012



Accessories

Description	Art.-No.
REMS Cobra 22 drive unit with guide hose	172000
REMS Cobra 32 drive unit with guide hose	174000

Pipe and drain cleaning tools see page 286–287.



REMS Cobra 22/32


Accessories for REMS Cobra 22, REMS Cobra 32
and other makes

Description	Size	Art.-No.
Cable and tool set 16 consisting of 5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 1 pair of guide gloves, steel case for tool set		172050
Cable and tool set 22 consisting of 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator, 1 pair of guide gloves, steel case for tool set		172051
Cable and tool set 32 consisting of 4 cable sections 32 × 4.5 m in cable carrier, straight auger 32, retrieving auger 32, funnel auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32, 1 pair of guide gloves, case for tool set		174050
Adapter drum REMS Cobra 22/8 with cable Ø 8 mm × 7.5 m long, with bulbous head		170011
Adapter drum REMS Cobra 32/8 with cable Ø 8 mm × 7.5 m long, with bulbous head		170012
Clamping jaws 16 (pack of 2) for REMS Cobra 32 for clamping drain cleaning cables Ø 16 mm		174101
Pipe and drain cleaning cable for pipe-Ø 10–50 (75) mm	8 × 7.5 m	170200
for pipe-Ø 25–125 mm	16 × 2.3 m	171200
for pipe-Ø 50–150 mm	22 × 4.5 m	172200
for pipe-Ø 50–250 mm	32 × 4.5 m	174200
Pipe and drain cleaning cable (5 pieces) in cable carrier for pipe-Ø 25–125 mm	16 × 2.3 m	171201
Pipe and drain cleaning cable (5 pieces) in cable carrier for pipe-Ø 50–150 mm	22 × 4.5 m	172201
Pipe and drain cleaning cable (4 pieces) in cable carrier for pipe-Ø 50–250 mm	32 × 4.5 m	174201
Pipe and drain cleaning cable S With thick special spring steel for high stability, e.g. during root cutting, milling, chain knocking for pipe-Ø 25–125 mm	16 × 2 m	171205
for pipe-Ø 50–150 mm	22 × 4 m	172205
for pipe-Ø 50–250 mm	32 × 4 m	174205
Pipe and drain cleaning cable with core prevents clogging of pipe and drain cleaning cable with dirt for pipe-Ø 25–125 mm	16 × 2.3 m	171210
for pipe-Ø 50–150 mm	22 × 4.5 m	172210
for pipe-Ø 50–250 mm	32 × 4.5 m	174210
Pipe and drain cleaning cable with core (5 pieces) in cable carrier for pipe-Ø 50–150 mm	22 × 4.5 m	172203
Pipe and drain cleaning cable with core (4 pieces) in cable carrier for pipe-Ø 50–250 mm	32 × 4.5 m	174203
Cable reduction 22/16 for connecting individual cables of different sizes	22/16	172154
Cable reduction 32/22 for connecting individual cables of different sizes	32/22	174154
Cable carrier (empty)	16	171150
	22	172150
	32	174150
Cable joint separator for releasing the safety lock	16	171151
	22/32	172151



Description	Size	Art.-No.
Straight auger for exploring the obstruction to withdraw a sample. Clearing of solid blockages caused by e.g. textiles, paper, kitchen waste	16 22 32	171250 172250 174250
Bulbous auger for minor obstructions caused by textiles and papers. Flexible, facilitates advancement in tight bends.	16 22 32	171265 172265 174265
Funnel auger for textile and paper obstructions in particular. Especially useful for cleaning larger diameter pipes. Also be used as a recovery tool for cables left in the pipe.	16 22 32	171270 172270 174270
Retrieving auger with extended, specially angled grappling arms. Used to recover cables left in the pipe. Not suitable for boring operations.	16 22 32	171275 172275 174275
Serrated blade borer for boring out greasy or heavily silted pipes, e.g. drains of washing machines, dishwashers. Riveted to the connector (not soldered or welded), so as to prevent any deformation of the hardened spring steel blades.	16/25 22/35 22/45 32/55	171280 172280 172281 174282
Serrated cross-blade borer Universal use for obstructions of all kinds, including incrustations, e.g. limescale deposits on the inside of the pipe. Riveted to the connector (not soldered or welded), so as to prevent any deformation of the hardened spring steel blades. Operation with pipe and drain cleaning cable S recommended.	16/25 16/35 22/35 22/45 22/65 32/45 32/65 32/90 32/115	171290 171291 172290 172291 172293 174291 174293 174295 174296
Forked cutter to remove moderate to severe silting or persistent grease contamination. Made of hardened spring steel.	16	171305
Cross-forked cutter to remove moderate to severe silting or persistent grease contamination. Made of hardened spring steel. Operation with pipe and drain cleaning cable S recommended.	16	171306
Serrated forked cutter Versatile use, e.g. for removal of slurries and for mincing (crushing) of root infested pipe. Made of hardened spring steel.	22/65 32/65 32/90	172305 174305 174306
Root cutter specially designed for root infested pipe. Hardened, replaceable ring-type saw, cutting to front and rear. Operation with pipe and drain cleaning cable S recommended.	22/65 32/65 32/90	172310 174310 174311
Chain knocker, smooth rings for final pipe and drain cleaning for removal of grease deposits and incrustations, e.g. limescale deposits on the inside of the pipe. For sensitive pipes, e.g. plastic.	16 22 32	171340 172340 174340
Chain knocker, spiked links for final pipe and drain cleaning for removal of grease deposits and incrustations, e.g. limescale deposits on the inside of the pipe. For cast and concrete pipes.	16 22 32	171341 172341 174341
Guide gloves, pair for secure gripping and guiding of pipe and drain cleaning cables		172610
Riveted guide glove, left Riveted guide glove, right for secure gripping and guiding of pipe and drain cleaning cables. Fully leather, inner surface riveted.		172611 172612



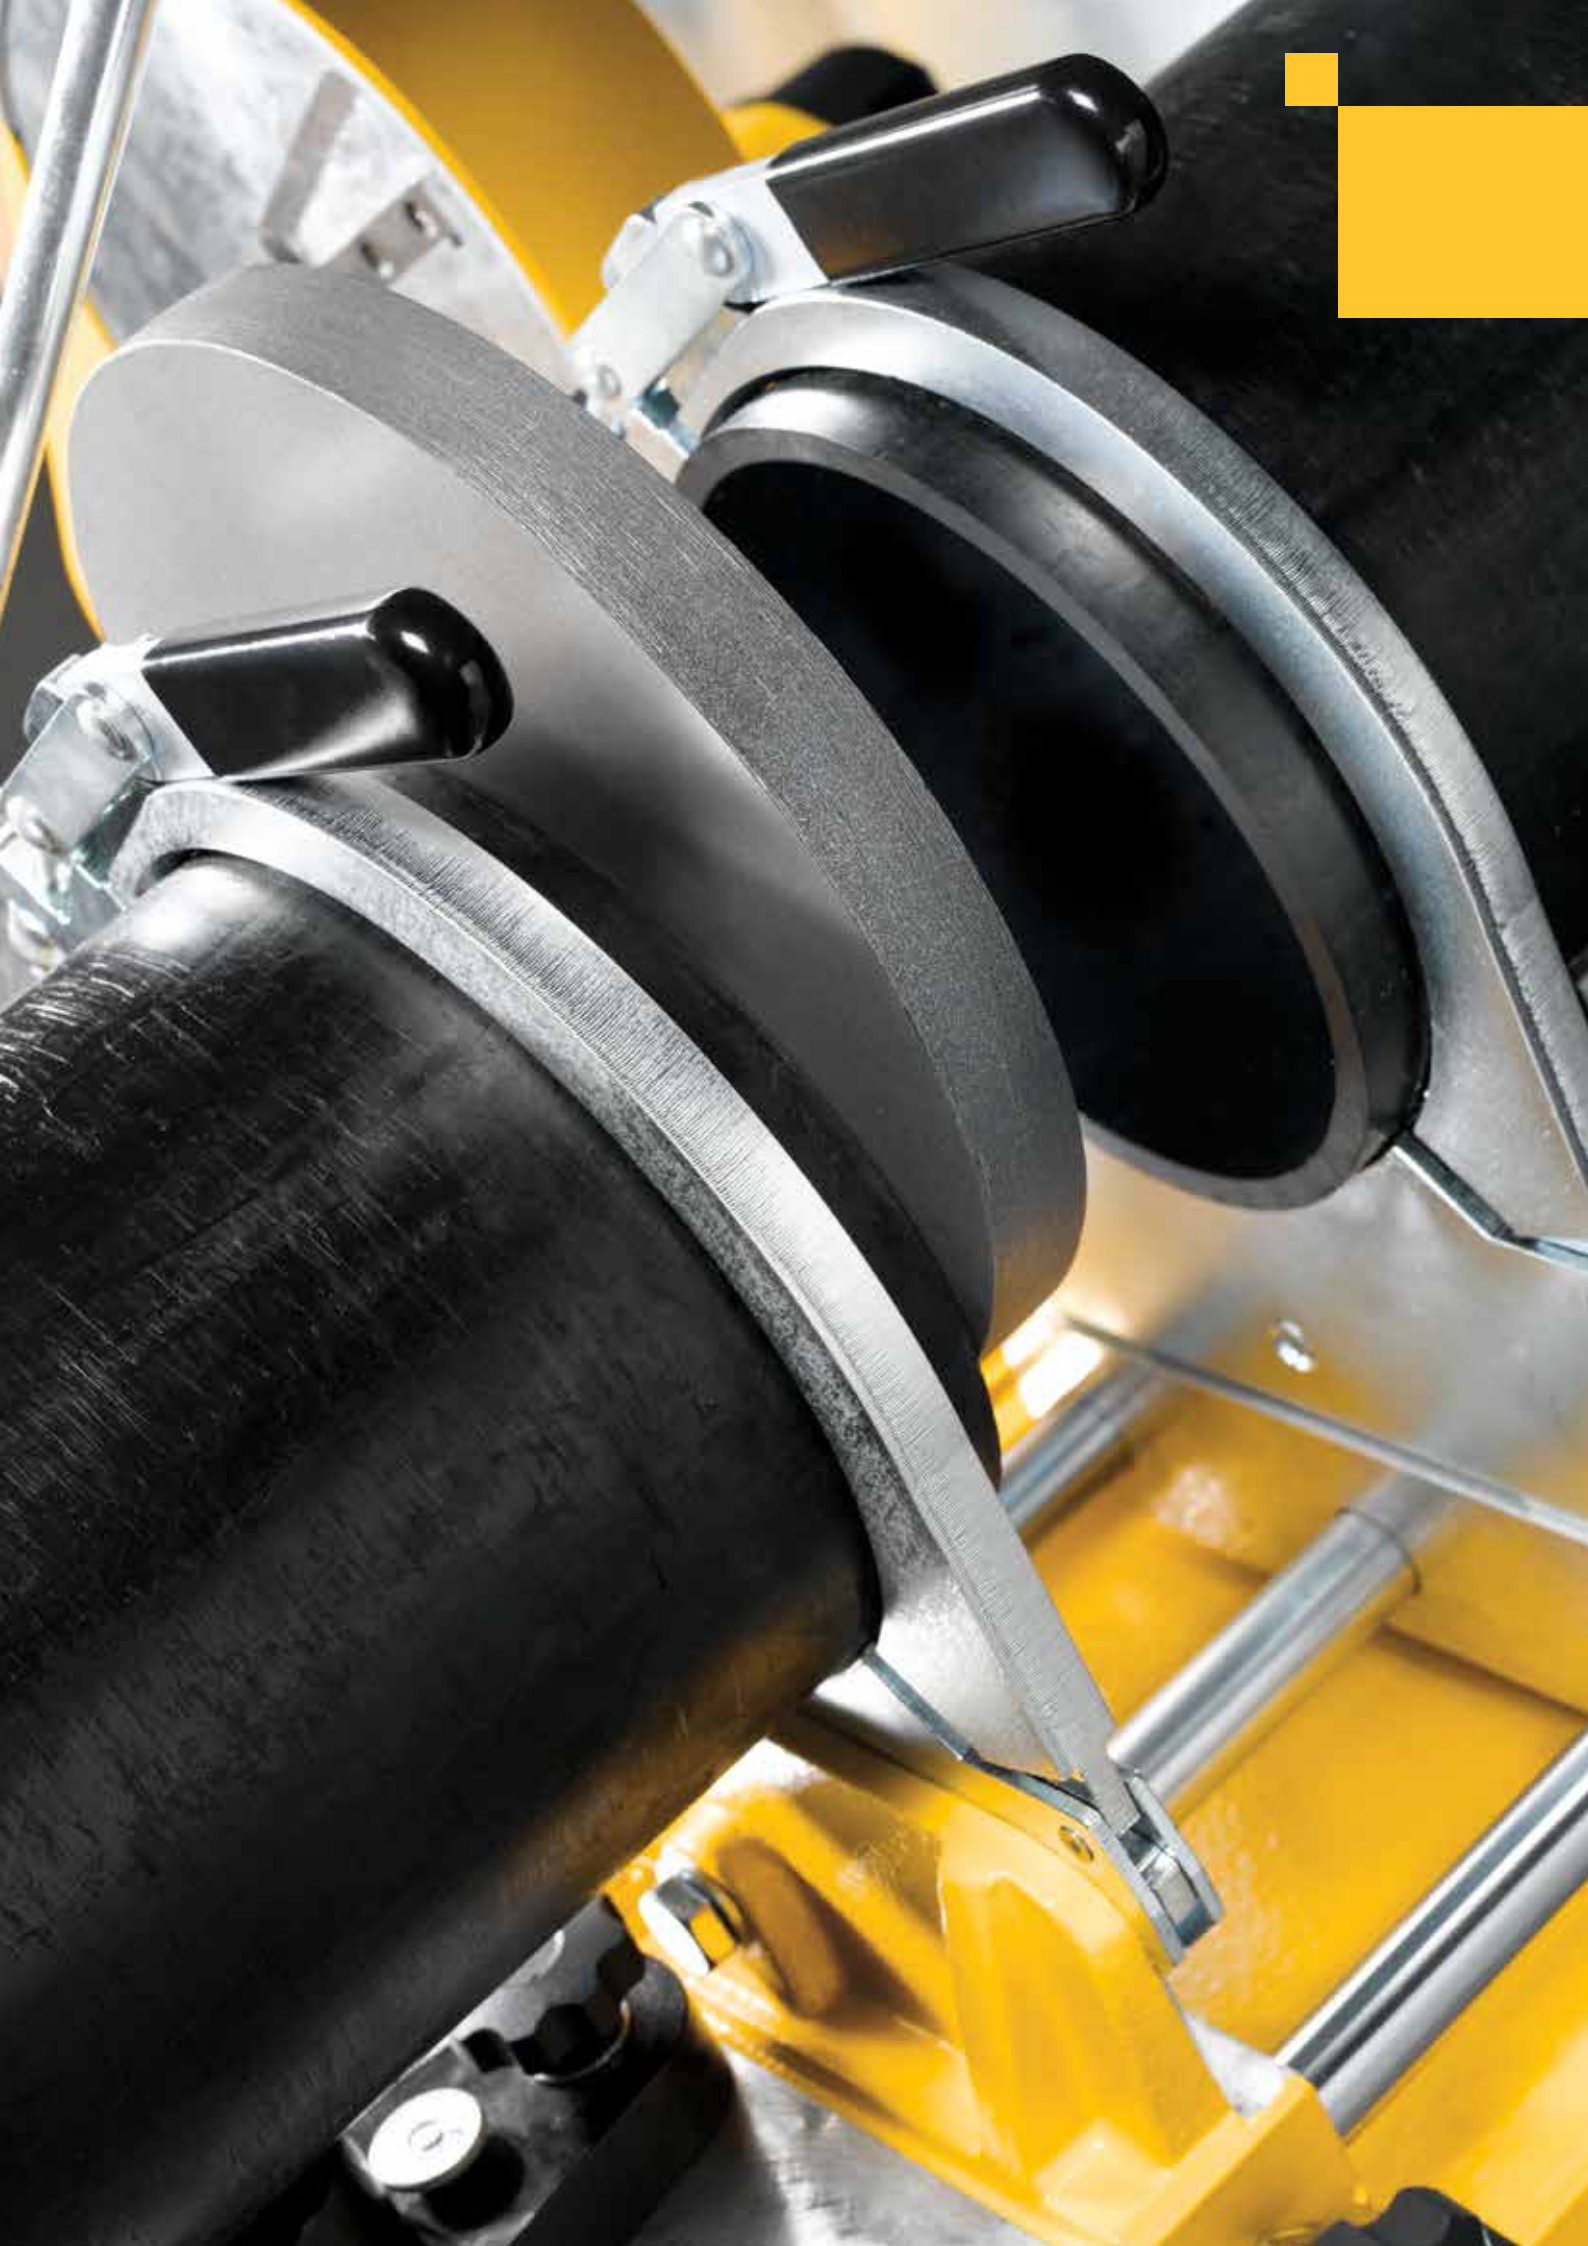

Plastic Pipe Welding



Electric sleeve welding unit

290



Sleeve welding units

291



Butt welding machines

292



Butt welding units

296

Powerful, handy unit for welding plastic drain pipes with electric sleeves in PE.

Plastic pipes and electric sleeves in PE Ø 40 – 160 mm

For Geberit, Akatherm-Euro, Coes, Valsir, Waviduo

REMS EMSG 160 – automatic welding.
Electronic control. Acoustic and visual monitoring of welding process.

Smallest sizes. Super-handy, light, only 0.7 kg. Can be used anywhere.

Electronic control with micro controller for automatic adjustment of welding current (welding temperature) and welding time according to sleeve size.

Automatic compensation of welding time in accordance with the ambient temperature.

Acoustic and visual monitoring of welding process.

Wide work radius through extra-long cables.

Sturdy, shock-proof plastic casing with carrying strap. Splash-proof.



German Quality Product



Supply format

REMS EMSG 160. Electric sleeve welding unit 230 V, 50 Hz, 1150 W, for welding plastic drain pipes with electric sleeves in PE made by Akatherm-Euro, Coes, Geberit, Valsir, Waviduo, Ø 40 – 160 mm. Electronic control, with acoustic and visual monitoring of welding process. In sturdy, shock-proof plastic casing. Welding leads 4.40 m. In a carton.

	Art.-No.	
	261001	

Accessories

Description	Art.-No.	
Case	151615	



Powerful electric tools for efficient sleeve welding.
Can be used anywhere, free-hand or on the work bench.

Plastic pipes and fittings
in PB, PE, PP, PVDF Ø 16 – 125 mm

REMS MSG – heating element according to DVS. High quality PTFE coating of heating spigots/sockets.

Design

Handy, light, safe. Free-hand or work bench assembly. Supplied in standard with supporting stand and bench support for mounting the unit in a horizontal or vertical position (bench support not supplied for MSG 25).

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. Heating spigots and heating sockets according to DVS. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Fastening screws in stainless steel.

Temperature and temperature control

Choice of

- adjustable temperature 180–290°C, preadjusted to 260°C for PP pipes, with electronic temperature control with tight tolerance (EE) or
- Fixed temperature for PP pipes at 263°C, with electronic temperature control with a tolerance of +/- 1% (FE).

The electronic and manual temperature control automatically controls the preadjusted temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.



Supply format

REMS MSG. Sleeve welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. Heating element 230 V, 50–60 Hz, without PTFE-coated heating spigots and heating sockets. Optionally adjustable temperature 180–290°C, pre-set for PP pipes at 260°C, with electronic temperature control (EE) or fixed temperature for PP pipes at 263°C, with electronic temperature control (FE). Support stand. Bench support for mounting the welding unit in a horizontal or vertical position (not for MSG 25). Hexagon key for assembly and dismantling of heating spigots and heating sockets. In a carton.

Description	Pipes Ø mm	Power W	Art.-No.
25 EE	16–25	500	256020
63 FE	16–63	800	256213
63 EE	16–63	800	256220
125 EE	16–125	1400	256320

Other voltages available.

Supply format

REMS MSG 63 FE Set. As REMS MSG 63 FE, but with PTFE-coated heating spigots, heating sockets for Ø 20, 25, 32 mm. Fastening screws in stainless steel. In steel case.

Description	Pipes Ø mm	Power W	Art.-No.
	16–63	800	256233

Other voltages available.

Supply format

REMS MSG 63 EE Set. As REMS MSG 63 EE, but with PTFE-coated heating spigots, heating sockets for Ø 20, 25, 32 mm. Fastening screws in stainless steel. In steel case.

Description	Pipes Ø mm	Power W	Art.-No.
	16–63	800	256240

Other voltages available.

Accessories

Description	Pipes Ø mm	Art.-No.
Heating spigot, heating socket, fastening screw in stainless steel	16	256400
	17	256410
	18	256420
	19	256430
	20	256440
	25	256450
	32	256460
	40	256470
	50	256480
	63	256490
	75	256500
	90	256510
	110	256520
125	256530	

Steel case

REMS MSG 25, REMS MSG 63	256242
REMS MSG 125	256342



Handy, easy-to-carry compact machine. Complete only 45 kg. Ideal for sanitary installations and installation of drain pipes, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings		
in PB, PE, PP, PVDF		Ø 40–160 mm
PE Ø 40–90 mm	SDR ≥ 6	
PE Ø 40–110 mm	SDR ≥ 9	
PE Ø 40–125 mm	SDR ≥ 11	
PE Ø 40–140 mm	SDR ≥ 17	
PE Ø 40–160 mm	SDR ≥ 21	

REMS SSM 160RS – ideal for the pipe fitter.
Light and compact. Heating element according to DVS.
Electronic temperature control. High-quality PTFE coating.
Powerful facing cutter. Closed facing cutter housing.

Design

- Light and compact. Low weight, complete only 60 kg. Can be easily carried by one person.
- Base frame in cast aluminium
 - Free suspension of butt welding unit REMS SSG 180 for exact alignment of the faces to be welded
 - Electric facing cutter unit for plane-parallel machining of pipe ends
 - Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
 - Quick clamping device, also suitable for angular branches.
 - Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
 - Can be used on the workbench or on the tubular stand provided as standard (= sub-frame = transport device).

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Protective cover for heating element.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device, also for angular branches

Sturdy quick clamping device made of nickel-plated steel, consisting of 2 vices with 2 clamping inserts each for pipes of Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. Also suitable for angular branches.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes Ø 160 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm.

Supply format

REMS SSM 160RS. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF, PE Ø 40–90 mm SDR ≥ 6, PE Ø 40–110 mm SDR ≥ 9, PE Ø 40–125 mm SDR ≥ 11, PE Ø 40–140 mm SDR ≥ 17, PE Ø 40–160 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50–60 Hz, 1200 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Protective cover for heating element. Electric planing device 230 V, 50–60 Hz, 500 W. Pressing device. Quick clamping device, also for angular branches, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Work key. Steel case for pipe support inserts and clamp inserts. Tubular stand = base frame = carrying device.

	Art.-No.	
	252026	

Accessories

Description	Art.-No.	
Planing blade (piece)	252103	



REMS SSM 160KS

Butt welding machine

Powerful, proven, easy-to-transport compact machine. Ideal for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings

in PB, PE, PP, PVDF

Ø 40–160 mm

PE Ø 40–90 mm	SDR ≥ 6
PE Ø 40–110 mm	SDR ≥ 9
PE Ø 40–125 mm	SDR ≥ 11
PE Ø 40–140 mm	SDR ≥ 17
PE Ø 40–160 mm	SDR ≥ 21

REMS SSM 160KS – ideal for the pipe fitter. Heating element according to DVS. Electronic temperature control. High-quality PTFE coating. Powerful facing cutter. Closed facing cutter housing.

Design

Compact, robust, job site-proven. Machine on sheet metal base weighs 101 kg. Easy to carry.

- Base frame in aluminium cast
- Free suspension of butt welding unit REMS SSG 180 for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Machine on sheet steel base with built-in drawer for clamping and pipe rest inserts
- Suitable for use on a work bench or on the standard supplied sheet metal cabinet (= carrying case).

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Protective cover for heating element.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device, also for angular branches

Sturdy quick clamping device made of nickel-plated steel, consisting of 2 vices with 2 clamping inserts each for pipes of Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. Also suitable for angular branches.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes of Ø 160 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm.

Supply format

REMS SSM 160KS. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF, PE Ø 40–90 mm SDR ≥ 6, PE Ø 40–110 mm SDR ≥ 9, PE Ø 40–125 mm SDR ≥ 11, PE Ø 40–140 mm SDR ≥ 17, PE Ø 40–160 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V 50–60 Hz, 1200 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Protective cover for heating element. Electric planing device 230 V, 50–60 Hz, 500 W. Pressing device. Quick clamping device, also for angular branches, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Sheet steel base with built-in drawer. Work key. Closed sheet metal cabinet = carrying case.

	Art.-No.
	252046

Accessories

Description	Art.-No.
Planing blade (piece)	252103



Powerful, proven, easy-to-transport compact machine. Ideal for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings

in PB, PE, PP, PVDF

Ø 75–250 mm

PE Ø 75–140 mm	SDR ≥ 6
PE Ø 75–160 mm	SDR ≥ 9
PE Ø 75–180 mm	SDR ≥ 11
PE Ø 75–200 mm	SDR ≥ 13.6
PE Ø 75–225 mm	SDR ≥ 17.6
PE Ø 75–250 mm	SDR ≥ 22

REMS SSM 250KS – compact and robust.

Design

Compact, robust, job site-proven. Easy to carry.

Machine on sheet metal base weighs 109 kg.

- Base frame in aluminium cast
- Free suspension of butt welding unit for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Machine on sheet steel base with built-in drawer for clamping and pipe rest inserts.
- Suitable for use on a work bench or on the standard supplied sheet metal cabinet (= carrying case).

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer.

High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device for angular branches

Sturdy quick clamping device made of nickel-plated steel which grips the pipe all round, consisting of 2 clamps Ø 250 mm with jaws Ø 250 mm, with 2 clamping jaws and 2 clamping inserts each for pipes of Ø 75, 90, 110, 125, 160, 200 mm. Also suitable for angular branches. Clamping jaws and clamping inserts available for pipes of Ø 140, 180, 225 mm.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 75, 90, 110, 125, 140, 160, 180, 200, 225, 250 mm. Pipe rest inserts available for pipes of Ø 140, 180, 225 mm.

Supply format

REMS SSM 250K. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 75–140 mm SDR ≥ 6, PE Ø 75–160 mm SDR ≥ 9, PE Ø 75–180 mm SDR ≥ 11, PE Ø 75–200 mm SDR ≥ 13.6, PE Ø 75–225 mm SDR ≥ 17.6, PE Ø 75–250 mm SDR ≥ 22. Butt welding unit with PTFE-coated heating element 230 V, 50–60 Hz, 1300 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50–60 Hz, 500 W. Quick clamping device, also for angular branches, consisting of 2 clamps Ø 250 mm with jaws Ø 250 mm, with 2 clamping jaws and 2 clamping inserts each for pipes of Ø 75, 90, 110, 125, 160, 200 mm. 2 pipe rests with pipe rest inserts Ø 75, 90, 110, 125, 160, 200, 250 mm. Sheet steel base with built-in drawer. Work key. Closed sheet metal cabinet = carrying case.

	Art.-No.	
	254025	

Accessories

Description	Art.-No.	
Planing blade (piece)	254103	



REMS SSM 315RF

Butt welding machine

Compact, easy-to-transport high-performance machine for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings		
in PB, PE, PP, PVDF		Ø 90 – 315 mm
PE Ø 90 – 180 mm	SDR ≥ 6	
PE Ø 90 – 200 mm	SDR ≥ 7.4	
PE Ø 90 – 225 mm	SDR ≥ 9	
PE Ø 90 – 250 mm	SDR ≥ 13.6	
PE Ø 90 – 280 mm	SDR ≥ 17	
PE Ø 90 – 315 mm	SDR ≥ 21	

REMS SSM 315RF – convenient for job site and workshop.

Design

Compact, robust, job site-proven. Weight including tubular stand on wheels 154 kg.

- Base frame in aluminium cast
- Free suspension of butt welding unit for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Standard supply with tubular wheel stand for secure standing and easy transport.

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature 180 – 290 °C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device

Sturdy quick clamping devices made of nickel-plated steel which grip the pipe all round, for pipes of Ø 315 mm. 4 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. Clamping inserts available for pipes of Ø 140, 180, 225, 280 mm.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes Ø 315 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe rest inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. Pipe rest inserts available for pipes of Ø 140, 180, 225, 280 mm.

Supply format

REMS SSM 315RF. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 90 – 180 mm SDR ≥ 6, PE Ø 90 – 200 mm SDR ≥ 7.4, PE Ø 90 – 225 mm SDR ≥ 9, PE Ø 90 – 250 mm SDR ≥ 13.6, PE Ø 90 – 280 mm SDR ≥ 17, PE Ø 90 – 315 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50 – 60 Hz, 3000 W. Adjustable temperature 180 – 290 °C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50 – 60 Hz, 500 W. Pressing device. 2 quick clamping devices Ø 315 mm with 2 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. 2 pipe supports Ø 315 mm with pipe support inserts Ø 90, 110, 125, 160, 200, 250 mm. Ring spanner. Boxes for clamping and pipe rest inserts. Tubular stand on wheels.

	Art.-No.
	255020

Accessories

Description	Art.-No.
Planing blade (piece)	255103



Powerful electric tools for efficient butt welding.
Can be used anywhere, free-hand or on the work bench.

Plastic pipes and fittings
in PB, PE, PP, PVDF ≤ Ø 280 mm

REMS SSG – heating element according to DVS.

Electronic temperature control.

High-quality PTFE coating.

Design

Handy, light, safe. Free-hand or work bench assembly. Supplied as standard with supporting stand. Bench support available as accessory for mounting the unit in a horizontal or vertical position.

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature 180–290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.



Info



Supply format

REMS MSG. Butt welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. PTFE-coated heating element 230 V, 50–60 Hz. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Support stand. In a carton.

Description	Heating element Ø mm	Pipes ≤ Ø mm	Power W	Art.-No.
110/45° EE	125	110	500	250020
125 EE	145	125	700	250120
180 EE	200	180	1200	250220
280 EE	300	280	1300	250320

Accessories

Description	Art.-No.
Bench support for mounting the unit in a horizontal or vertical position	
REMS SSG 110/45°, 125, 180	250041
REMS SSG 280	250341
Steel case	
REMS SSG 110/45°	250042
REMS SSG 125	250142
REMS SSG 180	250242
REMS SSG 280	250342
Protection cover for heating element	
REMS SSG 110, 110/45°, 125	250143
REMS SSG 180	250243
REMS SSG 280	250343















Diamond core drilling

Diamond chasing and cutting machine

Wet and dry suction

	Electric diamond core drilling machines	300
	Drill stands	308
	Universal diamond core drilling crowns	310
	Universal diamond core drilling crowns LS	312
	Electric diamond core drilling machine with micro-pulse technology	314
	Dry diamond core drilling crowns LS	317
	Tile drilling	318
	Diamond chasing and cutting machines	320
	Diamond cutting discs	321
	Dry and wet extractor	322

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete	≤ Ø 102 (132) mm
Masonry and other materials	≤ Ø 162 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 310–312.

REMS Picus S1 – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. For many materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male, BSPP ½ female. Robust, suitable for the building site. Extra light, only 5.2 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.

Drive

Robust, powerful 1850 W universal motor. Load speed drilling spindle 580 rpm. Stable, maintenance-free gear. Blocking protection by safety slip clutch. Tip strength with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 310–312). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³. Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull 2 and other suitable extractors, as accessory (page 309). REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 322).

Drilling start aid

Drilling start aid G ½ UDKB, with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction, with carbide masonry drill Ø 8 mm.

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 308).



Info



REMS Simplex 2



REMS Titan



REMS Picus S1 Basic-Pack

Supply format

REMS Picus S1 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete $\leq \varnothing 102$ (132) mm, masonry and other materials $\leq \varnothing 162$ mm. For dry and wet drilling, hand held or with drill stand. Drive machine with drilling crown connecting thread UNC 1 1/4 male, BSPP 1/2 female, maintenance-free gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 1850 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Load speed drilling spindle 580 rpm. Water supply device with adjustable shut-off valve and quick coupling with water stop and 1/2" hose connection. Stabiliser. Drilling start aid G 1/2 UDKB with drill $\varnothing 8$ mm, Allen key size 3. Single open-ended wrench size 32. In sturdy steel case.

	Art.-No.	
	180010	

Other voltages on request.

Supply format

REMS Picus S1 Set Simplex 2. REMS Picus S1 Basic-Pack with REMS Simplex 2 drilling stand including tools and fastening kit for masonry and concrete.

	Art.-No.	
	180032	

Other voltages on request.



REMS Picus S1 Set Simplex 2

Accessories

Description	Art.-No.	
REMS Picus S1 drive unit	180000	
Steel case with inlay	180600	
REMS Universal diamond core drilling crowns , inductively soldered, resolderable, see page 310.		
REMS universal diamond core drilling crowns LS , laser welded, high temperature-resistant, see page 312.		
REMS Pull 2 L / M , dry and wet extractors, see page 322		
Additional accessories see page 308–309.		



Powerful, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete	≤ Ø 152 (200) mm
Masonry and other materials	≤ Ø 250 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 310–312.

REMS Picus S3 – Core drilling instead of chiselling.
Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min.

1 system – 4 applications.
Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male, BSPP ½ female. Robust, suitable for the building site. Only 7.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.

Drive

Robust, powerful 2200 W universal motor. Stable, maintenance-free 3-speed gear for optimum selection of load speed according to the drilling diameter. Load speed drilling spindle 530 rpm, 1280 rpm, 1780 rpm. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 310–312). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³. Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull 2 and other suitable extractors, as accessory (page 309). REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 322).

Drilling start aid


Drilling start aid G ½ UDKB, with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction, with carbide masonry drill Ø 8 mm, as accessory.

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 308).

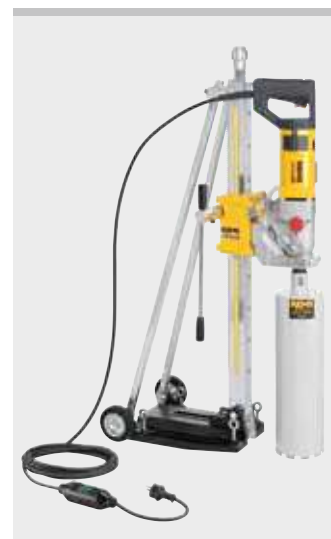

Info



REMS Simplex 2



REMS Titan



REMS Picus S3 Basic-Pack



REMS Picus S3 Set Titan

Supply format

REMS Picus S3 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete $\leq \varnothing 152$ (200) mm, masonry and other materials $\leq \varnothing 250$ mm. For dry and wet drilling, hand held or with drill stand. Drive machine with drilling crown connecting thread UNC 1 1/4 male, BSPP 1/2 female, maintenance-free 3-speed gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 2200 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock, personal protection switch (PRCD). Load speed drilling spindle 530 rpm, 1280 rpm, 1780 rpm. Water supply with adjustable shut-off valve and quick-coupling with water stop and hose connection 1/2". Stabiliser. Starting aid BSPP 1/2, Allen key size 3. Single open-ended wrench size 32. In sturdy steel case.

	Art.-No.	
	180011	

Other voltages on request.

Supply format

REMS Picus S3 Set Titan. REMS Picus S3 Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	180029	

Other voltages on request.

Supply format

REMS Picus S3 Set 62+82+132 Titan. REMS Picus S3 Basic-Pack with REMS Universal diamond core drilling crowns UDKB $\varnothing 62+82+132$ mm and REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	180028	

Other voltages on request.



REMS Picus S3 Set 62-82-132 Titan

Accessories

Description	Art.-No.	
REMS Picus S3 drive unit	180001	
Steel case with inlay	180600	
REMS Universal diamond core drilling crowns , inductively soldered, resolderable, see page 310.		
REMS universal diamond core drilling crowns LS , laser welded, high temperature-resistant, see page 312.		
REMS Pull 2 L / M , dry and wet extractors, see page 322		
Additional accessories see page 308–309.		



Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. With speed regulation. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete	≤ Ø 162 (200) mm
Masonry and other materials	≤ Ø 250 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 310–312.

REMS Picus SR – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. With speed regulation.

1 system – 4 applications.

Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1¼ male, BSPP ½ female. Robust, suitable for the building site. Extra light, only 6.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Spacer set for additional stabilisation of the REMS Picus SR drive unit on the REMS Titan drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½".

Drive

Robust, powerful 2200 W universal motor. Overheating protection by temperature monitoring of the motor's field winding with a PTC resistor (Positive Temperature Coefficient). Stable, maintenance-free, 2-step gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Speed-Regulation

Stepless electronic speed regulation of the drive machine for selecting the speed according to the material. The speed is steplessly adjustable on the dial: 250 rpm to 500 rpm (1st gear) or 600 rpm to 1200 rpm (2nd gear). The electronic speed control that is being used keeps the selected speed constant, also under load. The speed of the drilling crown is kept at the nominal value until it meets with resistance and drops below a critical value. The drive motor stops. When the load on the drive unit is relieved again, the drill runs back up to nominal speed so that work can continue immediately at nominal speed (Patent EP 2 085 191). Advantage: The optimum drilling speed (load speed) selected for the respective material and the drilling crown diameter remains constant for the entire duration of the drilling. For the best drilling performance and maximum life of the drilling crowns.

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns


Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 310–312). Connecting thread UNC 1¼ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³. Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull 2 and other suitable extractors, as accessory (page 309). REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 322).

Patent EP 2 085 191

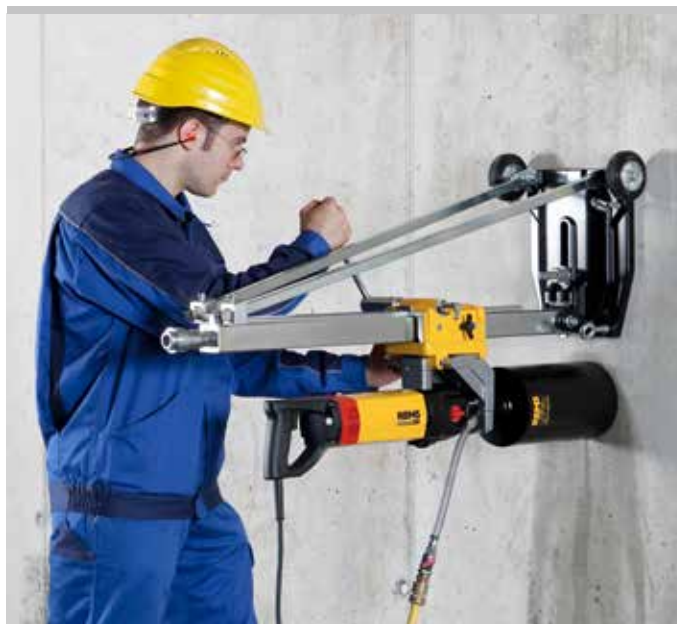

German Quality Product



Info

With speed regulation for the best drilling performance and maximum life of the drilling crowns.



REMS Simplex 2



REMS Titan

Drilling start aid

Drilling start aid G ½ UDKB, with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction, with carbide masonry drill Ø 8 mm, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 308).

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.



REMS Picus SR Basic-Pack



REMS Picus SR Set Titan



REMS Picus SR Set 62-82-132 Titan

Supply format

REMS Picus SR Basic-Pack. For core drilling in concrete, steel-reinforced concrete ≤ Ø 162 (200) mm, masonry and other materials ≤ Ø 250 mm. For dry or wet drilling, hand held or with drill stand. Drive machine with drilling crown connection thread UNC 1¼ male, G ½ female, maintenance-free 2-step gear with safety slip clutch, universal motor 230 V, 50–60 Hz, 2200 W. Stepless electronic speed regulation 250 rpm to 500 rpm (1st gear) or 600 rpm to 1200 rpm (2nd gear), overheating protection. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Spacer set. Single open ended wrench size 32. In sturdy steel case.

Art.-No.	
183010	

Other voltages on request.

Supply format

REMS Picus SR Set Titan. REMS Picus SR Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

Art.-No.	
183022	

Other voltages on request.

Supply format

REMS Picus SR Set 62+82+132 Titan. REMS Picus SR Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete and REMS Universal diamond core drilling crowns UDKB Ø 62+82+132 mm.

Art.-No.	
183023	

Other voltages on request.

Accessories

Description	Art.-No.
REMS Picus SR drive unit	183000
Spacer set for additional stabilisation of the REMS Picus SR drive unit on the REMS Titan drill stand, consisting of spacer and 2 cylinder head screws M 8×65	183632
Steel case with inlay	180600
REMS Universal diamond core drilling crowns , inductively soldered, resolderable, see page 310.	
REMS universal diamond core drilling crowns LS , laser welded, high temperature-resistant, see page 312.	
REMS Pull 2 L / M , dry and wet extractors, see page 322	
Additional accessories see page 308–309.	



Powerful, robust core drilling machine for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling with drill stand. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, masonry and other materials \varnothing 40–300 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 310–312.

REMS Picus S2/3,5 – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete \varnothing 62 mm in only 2 min.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only one type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1 1/4 male. Light loosening ring, for light loosening of the diamond core crowns. Compact, robust, suitable for the building site. Weight just 14.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete \varnothing 62 mm in only 2 min. Clamping plate for fast clamping to the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick coupling with water stop and hose connection 1/2".

Drive

Robust, powerful 3420 W universal motor. Stable, maintenance-free 2-speed gear for optimum selection of load speed according to the drilling diameter. Load speed drilling spindle 320 rpm, 760 rpm. Blocking protection by safety slip clutch. Rocker switch. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 310–312). Connecting thread UNC 1 1/4 female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Water extractor unit

Water extractor unit for wet drilling up to \varnothing 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer \varnothing 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand REMS Titan

Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to \varnothing 300 mm. For high demands. Drill column made of rigid, unbendable square precision steel tube \varnothing 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Continuously tiltable with degree scale up to 45°, with double support by adjustable, single-part steel girders, for maximum thrust pressure. Highly stable, 3-sided guidance of the drill column in the base plate and triple cross fastening for high rigidity in vertical drilling. 4 Eyebolts for levelling unevenness of the floor, for exact standing position. Drill depth scale. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Rigid connection plate made of wear-resistant spheroidal iron. Quick-clamping device for accommodating drive units with a suitable connection plate. Highly stable clamping bracket, unbendable and rigid, for accommodating drive units with \varnothing 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack. Base plate with groove for sealing ring of the vacuum fastening. Vacuum fastening as accessory. Drill column with adjustable clamping head for clamping the drill stand between the ceiling and floor or between two walls. Mobile drill stand for easy transport. Weight 19.5 kg.

With tools, consisting of Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splicing anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 x 52, quick clamping nut, washer, carbide masonry drill \varnothing 15 mm SDS-plus, in box.



Info



REMS Titan



REMS Picus S2/3,5 Basic-Pack

Supply format

REMS Picus S2/3,5 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed, Ø 40 – 300 mm. For dry and wet drilling with drill stand. Drive machine with drilling crown connecting thread UNC 1 1/4 male, maintenance-free 2-speed gear with safety slip clutch, universal motor 230 V, 50 – 60 Hz, 3420 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Load speed drilling spindle 320 rpm, 760 rpm. Water supply device with adjustable shut-off valve and quick coupling with water stop and hose connection 1/2". Light loosening ring. Single open-ended wrench size 32. In a carton.

	Art.-No.	
	180012	

Other voltages on request.

Supply format

REMS Picus S2/3,5 Set Titan. REMS Picus SR/3.5 Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

	Art.-No.	
	180030	

Other voltages on request.



REMS Picus S2/3,5 Set Titan

Accessories

Description

REMS Universal diamond core drilling crowns, inductively soldered, resolderable, see page 310.

REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 312.

REMS Pull 2 L / M, dry and wet extractors, see page 322

Additional accessories see page 308 – 309.



Supply format

REMS Simplex 2. Robust, handy drilling stand for core drilling up to Ø 202 mm. Drill column made of rigid, unbendable square precision steel tube \varnothing 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Drilling column guided in sturdy stand and double bolted for high rigidity during drilling. Steel section stand. 4 Set screws for levelling unevenness of the floor, for exact standing position. Clamping bracket for holding drive machines with clamping throat \varnothing 60 mm. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Stable clamping bracket, unbendable and rigid, for accommodating drive units with \varnothing 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack Weight 12 kg.

With tools comprising Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 \times 52, quick clamping nut, washer, carbide masonry drill \varnothing 15 mm SDS-plus in box.

For REMS Picus S1, REMS Picus S3, REMS Picus SR, REMS Picus DP and other makes.

	Art.-No.	
	183700	



Supply format

REMS Titan. Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 300 mm. For high demands. Drill column made of rigid, unbendable square precision steel tube \varnothing 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Continuously tiltable with degree scale up to 45°, with double support by adjustable, single-part steel girders, for maximum thrust pressure. Highly stable, 3-sided guidance of the drill column in the base plate and triple cross fastening for high rigidity in vertical drilling. 4 Eyebolts for levelling unevenness of the floor, for exact standing position. Drill depth scale. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Rigid connection plate made of wear-resistant spheroidal iron. Quick-clamping device for accommodating drive units with a suitable connection plate. Highly stable clamping bracket, unbendable and rigid, for accommodating drive units with \varnothing 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack. Base plate with groove for sealing ring of the vacuum fastening. Vacuum fastening as accessory. Drill column with adjustable clamping head for clamping the drill stand between the ceiling and floor or between two walls. Mobile drill stand for easy transport Weight 19,5 kg.

With tools comprising Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 \times 52, quick clamping nut, washer, carbide masonry drill \varnothing 15 mm SDS-plus in box.

System advantage: For REMS Picus S1, REMS Picus S3, REMS Picus SR, REMS Picus S2/3,5, REMS Picus DP and other makes. Use spacer set (see below) when using with REMS Picus SR.

	Art.-No.	
	183600	




Description	Art.-No.	
Spacer set for additional stabilisation of the REMS Picus SR drive unit on the REMS Titan drill stand, consisting of spacer and 2 cylinder head screws M 8 \times 65	183632	



Accessories

For REMS Picus S1, REMS Picus S3, REMS Picus SR, REMS Picus S2/3,5 and other makes

Description	Art.-No.
Water pressure tank for 10 ltr of water, for wet drilling without water connection	182006
Titan drilling template for easy setting of the fastening holes. For REMS Titan drilling stand.	183605
Carbide masonry drills Ø 15 mm SDS-plus for hammer anchors M12	079018
Hammer anchor M12 (pack of 50) , for concrete	079005
Setting iron for hammer anchor M12	182050
Carbide masonry drill Ø 20 mm SDS-plus for splaying anchors M12	079019
Splaying anchor M12 (pack of 10) , for masonry, reusable	079006
Quick clamping set 160 for fastening the drilling stand with anchors, consisting of cord threaded bar 160 mm with M12 x 52 thread, quick clamping nut, washer.	079010
Quick clamping set 500 for fastening the drilling stand without anchor, consisting of cord threaded bar 500 mm, 2 quick clamping nuts, 2 washers	183607
Titan vacuum fastening , consisting of cover plate with nipple for 3/8" screw connection and sealing ring for base plate.	183603
Vacuum pump , for vacuum ≤ -900 mbar (90%), consisting of dry running rotary slide pump, oil-free, performance 6 m ³ /h, condenser motor 230 V, 50-60 Hz, 250 W, splash water-protected, inside suction filter with silencer function and 5 m PVC fabric hose with bayonet coupling.	183670
Laser drilling centre pointer	183604
Drilling start aid G 1/2 UDKB , with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction (Art. No. 180160 R), with carbide masonry drill Ø 8 mm	180140
Carbide masonry drill Ø 8 mm for drilling aid	079013
Single open ended wrench size 41 for loosening the universal diamond core drilling crowns	079003
Light loosening ring , for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Sharpening stone for diamond core drilling crowns	079012
Circular spirit level , magnetic, for aligning the drill stand	182010
Suction rotor for dust extraction with G 1/2 male connecting thread, UNC 1 1/4 male connecting thread and with connection for REMS Pull 2 and other suitable extractors.	180160
Water suction device , for wet drilling up to Ø 170 mm, consisting of water collection ring with pressure ring, rubber washer Ø 200 mm and universal pressure pad for all REMS drilling stands.	183606
Rubber washer Ø 200 mm (pack of 10) , for water suction device	183675
REMS Pull 2 L / M , dry and wet extractor, certified as extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69, see page 322	

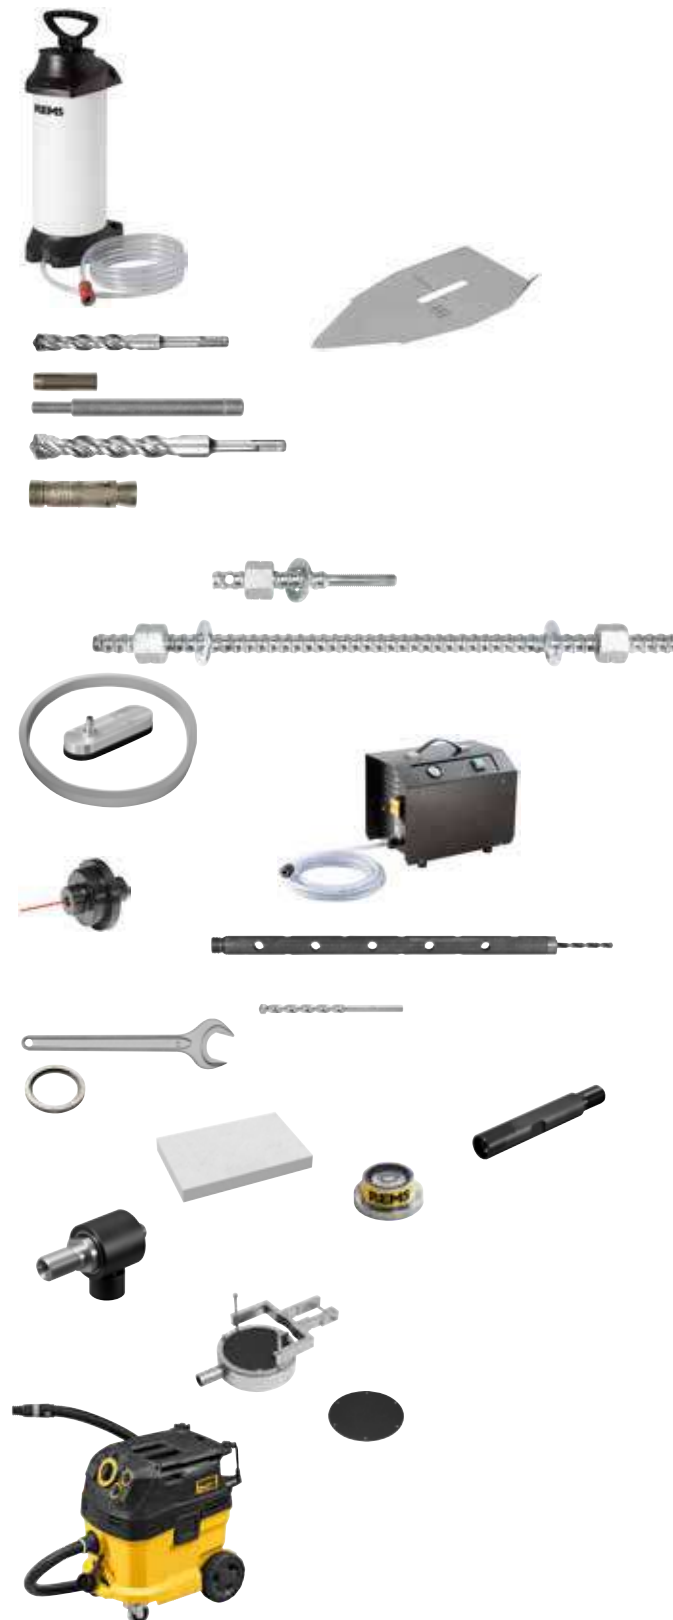

REMS Universal diamond core drilling crowns

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

High quality universal diamond core drilling crowns. Inductively soldered. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other Ø 32 – 300 mm

REMS Universal diamond core drilling crowns – Inductively soldered. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1¼ female. Drilling depth 420 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1¼ male. Adapter for using REMS Universal diamond core drilling crowns in drive machines having other connecting threads, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull 2 M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 322).

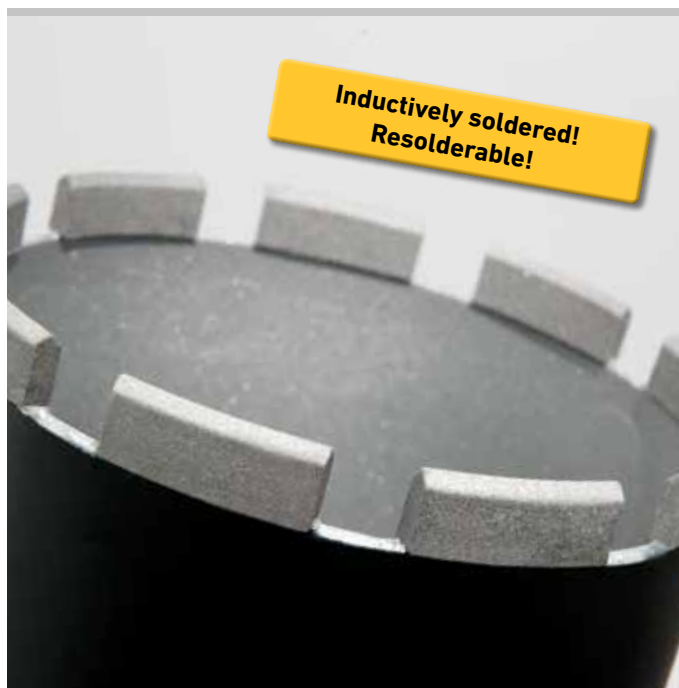

Info

REMS Universal diamond core drilling crowns

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

Supply format

REMS Universal diamond core drilling crown. Inductively soldered, resolderable. Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1 1/4 female. Drilling depth 420 mm. In a carton.

Ø × drilling depth × connection	Number of segments	Art.-No.
UDKB 32 × 420 × UNC 1 1/4	4	181010
UDKB 42 × 420 × UNC 1 1/4	4	181015
UDKB 52 × 420 × UNC 1 1/4	5	181020
UDKB 62 × 420 × UNC 1 1/4	6	181025
UDKB 72 × 420 × UNC 1 1/4	7	181030
UDKB 82 × 420 × UNC 1 1/4	7	181035
UDKB 92 × 420 × UNC 1 1/4	8	181040
UDKB 102 × 420 × UNC 1 1/4	8	181045
UDKB 112 × 420 × UNC 1 1/4	9	181050
UDKB 122 × 420 × UNC 1 1/4	10	181055
UDKB 127 × 420 × UNC 1 1/4	10	181059
UDKB 132 × 420 × UNC 1 1/4	11	181060
UDKB 152 × 420 × UNC 1 1/4	12	181065
UDKB 162 × 420 × UNC 1 1/4	12	181070
UDKB 182 × 420 × UNC 1 1/4	12	181075
UDKB 200 × 420 × UNC 1 1/4	12	181080
UDKB 225 × 420 × UNC 1 1/4	13	181085
UDKB 250 × 420 × UNC 1 1/4	14	181090
UDKB 300 × 420 × UNC 1 1/4	22	181095



Accessories

Description	Art.-No.
Light loosening ring, for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Adapter UNC 1 1/4 male to G 1/2 male	180052
Adapter UNC 1 1/4 male to G 1/2 female	180056
Adapter UNC 1 1/4 male for Hilti BI, adapter for using the REMS universal diamond core drilling crowns in Hilti BI drive units.	180053
Adapter UNC 1 1/4 male for Hilti BU, adapter for using the REMS universal diamond core drilling crowns in Hilti BU drive units.	180054
Sharpening stone for diamond core drilling crowns	079012
Single open ended wrench size 41 for UDKB	079003

Additional adapters for using REMS Universal diamond core drilling crowns LS in drive machines of other makes, on request.



REMS Universal diamond core drilling crowns LS

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

High quality universal diamond core drilling crowns. Laser welded. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other Ø 32–200 mm

REMS universal diamond core drilling crowns LS – laser welded. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1¼ female. Drilling depth 420 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1¼ male. Adapter for using REMS Universal diamond core drilling crowns LS in drive machines having other connecting threads, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull 2 M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 322).

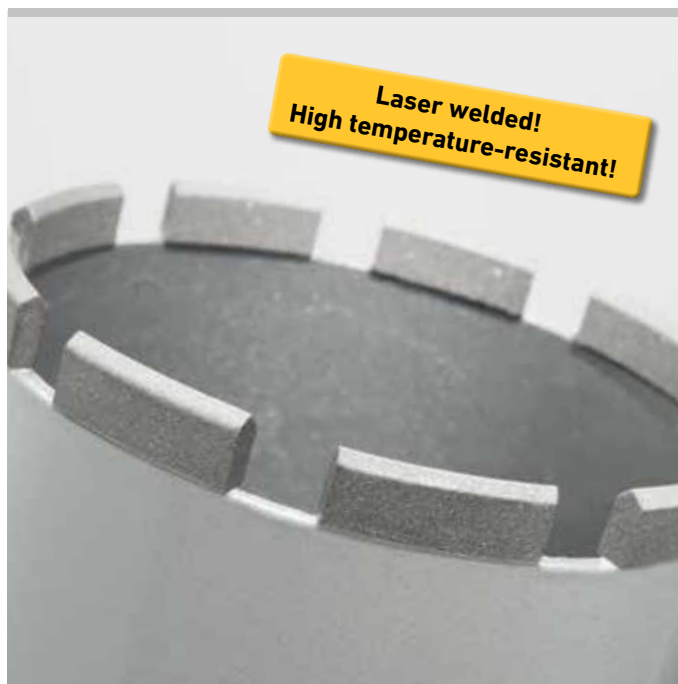

Info


REMS Universal diamond core drilling crowns LS

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

Supply format

REMS Universal diamond core drilling crown. Laser welded! High temperature-resistant! Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1 ¼ female. Drilling depth 420 mm. In a carton.

Ø × drilling depth × connection	Number of segments	Art.-No.
UDKB LS 32 × 420 × UNC 1 ¼	1	181410
UDKB LS 42 × 420 × UNC 1 ¼	4	181415
UDKB LS 52 × 420 × UNC 1 ¼	5	181420
UDKB LS 62 × 420 × UNC 1 ¼	6	181425
UDKB LS 72 × 420 × UNC 1 ¼	6	181430
UDKB LS 82 × 420 × UNC 1 ¼	7	181435
UDKB LS 92 × 420 × UNC 1 ¼	8	181440
UDKB LS 102 × 420 × UNC 1 ¼	9	181445
UDKB LS 112 × 420 × UNC 1 ¼	9	181450
UDKB LS 122 × 420 × UNC 1 ¼	10	181455
UDKB LS 127 × 420 × UNC 1 ¼	10	181459
UDKB LS 132 × 420 × UNC 1 ¼	10	181460
UDKB LS 152 × 420 × UNC 1 ¼	11	181465
UDKB LS 162 × 420 × UNC 1 ¼	12	181470
UDKB LS 182 × 420 × UNC 1 ¼	13	181475
UDKB LS 200 × 420 × UNC 1 ¼	14	181480

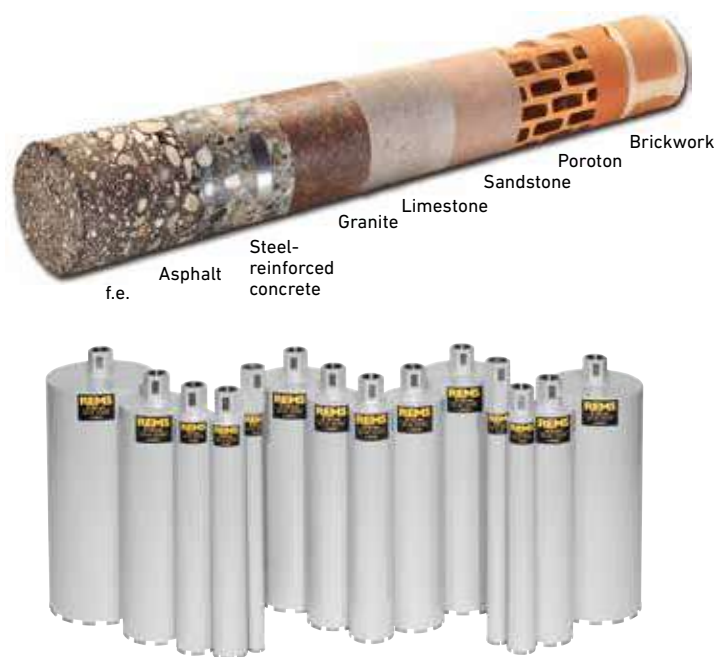

Accessories

Description	Art.-No.
Light loosening ring , for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Adapter UNC 1 ¼ male to G ½ male	180052
Adapter UNC 1 ¼ male to G ½ female	180056
Adapter UNC 1 ¼ male for Hilti BI , adapter for using the REMS universal diamond core drilling crowns in Hilti BI drive units.	180053
Adapter UNC 1 ¼ male for Hilti BU , adapter for using the REMS universal diamond core drilling crowns in Hilti BU drive units.	180054
Sharpening stone for diamond core drilling crowns	079012
Single open ended wrench size 41 for UDKB	079003

Additional adapters for using REMS Universal diamond core drilling crowns LS in drive machines of other makes, on request.



REMS Picus DP

Electric diamond core drilling machine
with micro-pulse technology

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. With micro-pulse technology. Especially for dry drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete ≤ Ø 162 (202) mm

Masonry and other materials ≤ Ø 202 mm

REMS dry diamond core drilling crowns, also suitable for drive machines of other makes, see page 317.

REMS Picus DP – with micro-pulse technology

For core drilling without water. Clean, easy, fast, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 5 min.

Especially for dry drilling

Drive machine with micro-pulse technology, specially developed for dry drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Suitable for many, especially hard materials. For pipeline and cable ducting, ventilation channels, test core drilling. In combination with the REMS Pull 2 M vacuum cleaner, ideal for making core bores in finished rooms, e.g. in residential, office and industrial buildings.

Design

Compact, handy drive machine for low-vibration core drilling, with drilling crown connecting thread UNC 1 ¼ male, BSPP ½ female. Compact drive unit for low-vibration core drilling, with drilling crown connecting thread UNC 1 ¼ outside, G ½ inside. Micro-pulse technology can be switched on and off: Pulse disc with 24 teeth generates 28,800 pulses min⁻¹ in idle mode at 1,200 min⁻¹, under load at 880 min⁻¹ 21,120 pulses min⁻¹. Robust, suitable for the building site. Extra light, only 7 kg. Simple, fast work without water, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 5 min. Practical spade handle and stabiliser for hand held drilling. Integrated suction rotor for dust extraction with connection for REMS Pull 2 M and other suitable vacuum cleaners. Throat Ø 60 mm for holding the drive machine in the drill stand.

Drive

Robust, powerful 2200 W universal motor. Load speed drilling spindle 8080 rpm. Stable, maintenance-free gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Dry diamond core drilling crowns LS

Especially for dry drilling with core drilling machines with micro-pulse technology, laser welded, high temperature-resistant (page 317), for drilling without water, hand held or with drill stand. Connecting thread UNC 1 ¼ female. Drilling depth 320 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for dry drilling in steel-reinforced concrete and masonry. Light loosening ring, for light loosening of the dry diamond core drilling crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³. Observe the national regulations.

Use REMS Pull 2 M for high-performance extraction of drilling dusts from the drilling gap during dry drilling (page 322). The REMS Pull 2 M safety vacuum cleaner is certified for extracting health hazardous dusts of dust class M.

Drilling start aid

Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 316).



German Quality Product



Info



REMS Simplex 2



REMS Titan



REMS Picus DP Basic-Pack



REMS Picus DP Set Simplex 2



REMS Picus DP Set Titan



REMS Picus DP/Pull 2 M Set-Pack

Supply format

REMS Picus DP Basic-Pack. Electric diamond core drilling machine with micro-pulse technology for core drilling without water in concrete, steel-reinforced concrete $\leq \varnothing 162$ (202) mm, masonry and other materials $\leq \varnothing 202$ mm, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1 1/4, female connection thread G 1/2, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50–60 Hz, 2200 W universal motor, integrated dust extraction. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Load speed drilling spindle 880 rpm. Stabiliser. Drill start aid G 1/2 TDKB with $\varnothing 8$ mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case.

	Art.-No.	
	180016	

Other voltages on request.

Supply format

REMS Picus DP Set Simplex 2. REMS Picus DP Basic-Pack with REMS Simplex 2 drilling stand including tools and fastening kit for masonry and concrete.

	Art.-No.	
	180033	

Other voltages on request.

Supply format

REMS Picus DP Set Titan. REMS Picus DP Basic-Pack with REMS Titan drilling stand including tools and fastening kit for masonry and concrete.

	Art.-No.	
	180035	

Other voltages on request.

Supply format

REMS Picus DP/Pull 2 M Set-Pack. REMS Picus DP Basic-Pack, Art.-No. 180016 R110G, and REMS Pull 2 M Set, Art.-No. 185601 R220G.

	Art.-No.	
	180036	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS Picus DP drive unit	180003	
Steel case with inlay	180600	
REMS dry diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 317.		
REMS Pull 2 M, dry and wet extractor, see page 322		
Additional accessories see page 316.		



Description	Art.-No.
REMS Simplex 2. Robust, handy drilling stand for core drilling up to Ø 202 mm. Description see page 308.	183700
REMS Titan. Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 300 mm. For high demands. Description see page 308.	183600
Titan drilling template for easy setting of the fastening holes. For REMS Titan drilling stand.	183605
Carbide masonry drills Ø 15 mm SDS-plus for hammer anchors M12	079018
Hammer anchor M12 (pack of 50) , for concrete	079005
Setting iron for hammer anchor M12	182050
Carbide masonry drill Ø 20 mm SDS-plus for splaying anchors M12	079019
Splaying anchor M12 (pack of 10) , for masonry, reusable	079006
Quick clamping set 160 for fastening the drilling stand with anchors, consisting of cord threaded bar 160 mm with M12 × 52 thread, quick clamping nut, washer.	079010
Quick clamping set 500 for fastening the drilling stand without anchor, consisting of cord threaded bar 500 mm, 2 quick clamping nuts, 2 washers	183607
Titan vacuum fastening , consisting of cover plate with nipple for 3/8" screw connection and sealing ring for base plate.	183603
Vacuum pump , for vacuum ≤ -900 mbar (90%), consisting of dry running rotary slide pump, oil-free, performance 6 m ³ /h, condenser motor 230 V, 50–60 Hz, 250 W, splash water-protected, inside suction filter with silencer function and 5 m PVC fabric hose with bayonet coupling.	183670
Laser drilling centre pointer	183604
Drilling start aid G 1/2 TDKB , with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm	180145
Carbide masonry drill Ø 8 mm for drilling aid	079013
Single open ended wrench size 41 for loosening the universal diamond core drilling crowns	079003
Light loosening ring , for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Sharpening stone for diamond core drilling crowns	079012
Circular spirit level , magnetic, for aligning the drill stand	182010
REMS Pull 2 M , dry and wet extractor, certified as extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69, see page 322	



REMS dry diamond core drilling crowns LS

For REMS Picus DP and other suitable makes

High quality dry diamond core drilling crowns. Laser welded. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material.

Concrete, steel-reinforced concrete, aggregate concrete, brick, clinker, all kinds of masonry, natural stone, asphalt, all kinds of screed and other \varnothing 32 – 202 mm

REMS dry diamond core drilling crowns LS – Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, hand held or with drill stand.

Single connecting thread UNC 1 1/4 female. Drilling depth 320 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with diamonds positioned in the bonding agent. For fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Driven by a REMS Picus DP drive unit and suitable drive units of other makes with UNC 1 1/4 outer connecting thread.

Use REMS Pull 2 M for high-performance extraction of drilling dusts from the drilling gap during dry drilling (page 322). The REMS Pull 2 M safety vacuum cleaner is certified for extracting health hazardous dusts of dust class M.

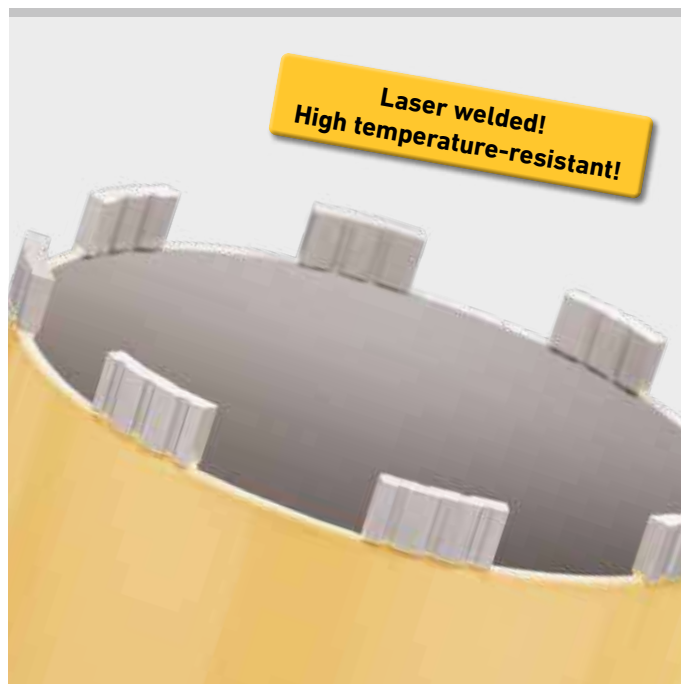

Supply format

REMS dry diamond core drilling crowns LS. Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1 1/4 female. Drilling depth 320 mm. In a carton.

\varnothing × drilling depth × connection	Number of segments	Art.-No.
TDKB LS 32 × 320 × UNC 1 1/4	3	181500
TDKB LS 42 × 320 × UNC 1 1/4	4	181502
TDKB LS 52 × 320 × UNC 1 1/4	5	181504
TDKB LS 62 × 320 × UNC 1 1/4	5	181506
TDKB LS 72 × 320 × UNC 1 1/4	6	181508
TDKB LS 82 × 320 × UNC 1 1/4	6	181510
TDKB LS 92 × 320 × UNC 1 1/4	6	181512
TDKB LS 102 × 320 × UNC 1 1/4	7	181514
TDKB LS 112 × 320 × UNC 1 1/4	7	181516
TDKB LS 122 × 320 × UNC 1 1/4	8	181532
TDKB LS 127 × 320 × UNC 1 1/4	8	181518
TDKB LS 132 × 320 × UNC 1 1/4	8	181520
TDKB LS 142 × 320 × UNC 1 1/4	8	181522
TDKB LS 152 × 320 × UNC 1 1/4	8	181524
TDKB LS 162 × 320 × UNC 1 1/4	9	181526
TDKB LS 182 × 320 × UNC 1 1/4	9	181528
TDKB LS 202 × 320 × UNC 1 1/4	10	181530

Accessories

Description	Art.-No.
Light loosening ring , for light loosening of the diamond core crown	180015
Drilling crown extension 200 mm	180155
Sharpening stone for diamond core drilling crowns	079012
Single open ended wrench size 41 for UDKB	079003

Additional adapters for using REMS dry diamond core drilling crowns LS in drive machines of other makes, on request.



Diamond tipped dry drilling crowns for fast, clean drilling in all kinds of tiles. Ideal for assembly and renovation.

Ceramic, fine clay, granite, marble etc.

REMS tile drilling – for dry drilling.

Can be used universally for dry drilling without hammering in ceramic, fine clay, granite, marble and other materials. No cracking of the tiles.

No water necessary.

Special wax filling inside the dry drilling crown as a cooling lubricant, becomes liquid when heated and cools the dry drilling crown.

Simple, free-hand starting by drill aid with vacuum fastening.

Hexagon connection for 1/4" bit holders.

Drive by cordless REMS Helix 22 V VE power drill (page 108) and other electric drills/screwdrivers (speed ≥ 1,000 rpm).



Supply format

REMS tile drilling Set 6 + 8 + 10. Diamond-studded dry drilling crowns with special wax filling. For ceramic, fine clay, granite, marble and other materials. Tile drilling Ø 6, 8, 10 mm, drill aid with vacuum fastening. In blister pack.

	Art.-No.
	181700

Accessories

Description	Art.-No.
REMS tile drilling Ø 5 mm	181710
REMS tile drilling Ø 6 mm	181711
REMS tile drilling Ø 8 mm	181712
REMS tile drilling Ø 10 mm	181713
REMS tile drilling Ø 12 mm	181714
REMS tile drilling Ø 14 mm	181715

REMS Helix 22 V VE, cordless drill/screwdriver, see page 108





Compact, handy power tool for dry chasing and cutting, e.g. of concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. For trade and industry.

REMS Krokodil 125

Chase depth	≤ 38 mm
Chase width	≤ 43 mm
Number of diamond cutting discs	1 – 2

REMS Krokodil 180 SR

Chase depth	≤ 61 mm
Chase width	≤ 62 mm
Number of diamond cutting discs	1 – 3

REMS Universal diamond cutting discs, also for suitable drive machines of other makes, see page 321.

REMS Krokodil – chasing instead of chiselling. Full contact support plate. Multi-function electronics.

Universal use

Universal drive machine for dry chasing and cutting. Ideal for producing chases/grooves for laying pipes and electric cables in heating, sanitary and electrical installation, air-conditioning and cooling technology.

Design

REMS Krokodil 125: Compact, handy drive machine, only 5.8 kg. Robust, suitable for building site conditions. Fast, easy working, e.g. chases in masonry 500 mm long, 38 mm deep, only 25 s. Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed. Practical switch grip, adjustable in two positions, parallel or transversely to the machine axis and swivel handle, for optimum working position and ergonomic work. Locking of the drive shaft for easy changing of the universal diamond cutting discs. 4 spacer discs of different thicknesses according to desired chase width screws to the cutting discs in a stable block, ensure an even chase width. Continuously adjustable depth stop. Suction nozzle for connecting a dust extractor integrated into the housing.

REMS Krokodil 180 SR: Compact, handy drive machine, only 8.0 kg. Robust, suitable for building site conditions. Fast, easy working, e.g. chases in masonry 500 mm long, 61 mm deep, only 34 s. Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed. Practical switch handle with triple force-transmitting leverage for easy plunge-in and effective feeding. Swivel handle, for optimum working position and ergonomic work. Locking of the drive shaft for easy changing of the universal diamond cutting discs. Spacer discs of different thicknesses according to desired chase width screws to the cutting discs in a stable block, ensure an even chase width. Continuously adjustable depth stop. Suction nozzle for connecting a dust extractor integrated into the housing.

Drive

REMS Krokodil 125: Robust, powerful universal motor, 1,850 W. Load speed of the drive shaft of the cutting discs 5,000 rpm. Strong, maintenance-free gear. Connecting cable 2.3 m. Safety switch with lock.

REMS Krokodil 180 SR: Robust, powerful universal motor, 2,000 W. Load speed of the drive shaft of the cutting discs 3,300 rpm. Overheating protection by temperature monitoring of the motor's field winding with a PTC resistor (Positive Temperature Coefficient). Strong, maintenance-free gear. Connecting cable 5.7 m. Safety switch with lock. Restart protection in case of mains failure.

Speed Regulation

The electronic tachometer speed control (REMS Krokodil 180 SR) used for regulation keeps the speed constant, also under load. The speed of the cutting disc is kept at the nominal value until it meets with resistance and drops below a critical value. The drive motor stops. When the load on the drive unit is relieved again, the drill runs back up to nominal speed so that work can continue immediately at nominal speed (**Patent EP 2 085 191**). Advantage: The chasing and cutting speed (load speed) is maintained during the entire chasing and cutting process for a high chasing and cutting performance.

Multi-function electronics

Multifunction electronics with start-up current limiting for soft starting for delicate engagement of the diamond cutting discs, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond cutting discs

Universally usable for straight chasing and cutting. Specially developed, high quality diamond segments with high diamond content and special bonding for excellent chasing/drilling performance and very long life. Optionally REMS Universal diamond cutting discs LS Turbo, laser-welded, high temperature-resistant, for fast cuts and cuts in hard materials or REMS Universal diamond cutting discs LS H-P, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with long life (page 321), metal body in accordance with EN 13236. Mounting bore Ø 22.23 mm.



Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of $> 0.1 \text{ mg/m}^3$. Observe the national regulations. REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 322).

Supply format

REMS Krokodil 125 Basic-Pack. Electric diamond chasing and cutting grinder for chasing and cutting concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. Chase depth 38 mm, continuously adjustable. Chase width $\leq 43 \text{ mm}$, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft $\varnothing 22.2 \text{ mm}$, for 1 or 2 diamond cutting discs in accordance with EN 13236, $\leq \varnothing 125 \text{ mm}$, with maintenance-free gear, 230 V, 50–60 Hz, 1,850 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection. Connecting cable 2.3 m. Safety switch with lock. Load speed 5,000 rpm. Suction nozzle for connecting an extractor/dust extractor. Pin wrench size 13. In sturdy carrying case.

	Art.-No.	
	185010	

Other voltages on request.



Supply format

REMS Krokodil 180 SR Basic-Pack. Electric diamond chasing and cutting grinder with speed regulation. For chasing and cutting concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. Chase depth 61 mm, continuously adjustable. Chase width $\leq 62 \text{ mm}$, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft $\varnothing 22.2 \text{ mm}$, for 1, 2 or 3 diamond cutting discs in accordance with EN 13236, $\leq \varnothing 180 \text{ mm}$, with maintenance-free gear, 230 V, 50–60 Hz, 2,000 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection, overheating protection. Restart protection in case of mains failure. Connecting cable 5.7 m. Safety switch with lock. Load speed 3,300 rpm. Suction nozzle for connecting an extractor/dust extractor. Pin wrench size 13. In sturdy steel case.

	Art.-No.	
	185011	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS Krokodil 125 drive unit	185000	
REMS Krokodil 180 SR drive unit	185001	
REMS Universal diamond cutting disc LS-Turbo $\varnothing 125 \text{ mm}$, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with metal body in accordance with EN 13236	185021	
REMS Universal diamond cutting disc LS H-P $\varnothing 125 \text{ mm}$, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, long life, with metal body in accordance with EN 13236.	185022	
REMS Universal diamond cutting disc LS-Turbo $\varnothing 180 \text{ mm}$, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with metal body in accordance with EN 13236	185026	
REMS Universal diamond cutting disc LS H-P $\varnothing 180 \text{ mm}$, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, long life, with metal body in accordance with EN 13236.	185027	
Chasing chisel for removing the ridge after chasing	185024	
Case with inlay for REMS Krokodil 125	185054	
Steel case	185058	
REMS Pull 2 L / M , dry and wet extractors, see page 322		



Powerful, electric dry and wet extractor with automatic filter cleaning. For commercial use in trade and industry.

For extraction of dusts, dirt and liquids.

Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding.

Certified as extractor and dust extractor for extracting health hazardous dusts.

Ideal for extracting drilling sludge during core drilling.

REMS Pull 2 L

Dust class in accordance with EN 60335-2-69	L
Exposure limit/work place limit	> 1 mg/m ³
Penetration level	≤ 0.1 %

REMS Pull 2 M

Dust class in accordance with EN 60335-2-69	M
Exposure limit/work place limit	> 0.1 mg/m ³
Penetration level	≤ 0.1 %

REMS Pull 2 – for dry and wet suction.
Constantly high suction performance
by permanent automatic filter cleaning.
Certified for extracting health hazardous dusts.

Universal use

Powerful, handy extractor for dry and wet suction. For extraction of dusts, dirt and liquids. Excellently suited for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified as an extractor and dust extractor for extracting health hazardous dusts of dust class L or M in accordance with EN 60335-2-69. For commercial use in trade and industry.

Design

Compact, handy design. REMS Pull 2 L only 13.5 kg, REMS Pull 2 M only 14.2 kg. Light and manoeuvrable by rubber wheels and steerable castors, lockable by castor with brake. Large tank capacity 31 l, filling volume for liquids 17 l. On/Off switch with selection without filter cleaning or with filter cleaning with a 15 s or 60 s cycle. Adapter for connecting a power tool to the vacuum cleaner. Flexible 4 m, electrically conductive suction hose (Pull M), ergonomically angled handle, 2 pluggable, chrome-plated metal suction pipes 0.5 m for adapting the suction pipe length. Wide wet/dry surface attachment 300 mm with rubber-coated castors, optionally brush strips for extracting dusts and dirt or rubber lips for extracting liquids. Joint attachment for confined spaces. Large working radius by long 7.5 m connecting lead. Holders for connecting lead, suction hose, metal suction tubes and accessories integrated into the extractor. Practical handle for easy transport. Integrated fittings for fixing a REMS L-Boxx system case.

REMS Pull 2 M is suitable and certified for the extraction of health hazardous dusts of dust class M in accordance with EN 60335-2-69, with electronic flow monitoring, selector switch for adapting the suction power to different suction hose diameters (21, 27, 32, 35, 40 mm) and stopper for the suction hose connection nozzle.

Permanent automatic filter cleaning

REMS Pull 2 L and REMS Pull 2 M with innovative, patented, automatic filter cleaning, prevents clogging of the filter with dust, especially effective in fine dust applications. The flat pleated filter is cleaned automatically by targeted, powerful shots of air every 15 s or 60 s depending on the setting. The suction force remains constantly high during cleaning. Patented flat folded filter system.

Drive

Robust, powerful bypass motor, 1,200 W, with high-power turbine. High suction power, continuously adjustable up to an air rate ≤ 143 m³/h, for optimum adaptation to the suction surface and the extracted product.

Automatic switch-off

Filling level limiting with automatic switch off on reaching the maximum liquid filling level when extracting electrically conductive liquids.

Automatic power tool on/off

Appliance socket for power tools up to 2,200 W, with electronic automatic on/off integrated into the extractor. The extractor switches on/off automatically when the power tool is switched on/off. For convenient working.

Anti-static system (REMS Pull 2 M)

Static charge is dissipated to the earthed upper section of the extractor by electrically conductive metal suction pipes, electrically conductive handle E, electrically conductive suction hose E and electrically conductive suction hose connection nozzle.



Certified extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69.



Extraction of health hazardous dusts when chasing and cutting:
REMS Pull 2 M Set



Extraction of health hazardous dusts when dry drilling:
REMS Pull 2 M Set D

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/work place limit of > 0.1 mg/m³. Observe the national regulations.

Water extraction

PES flat folded filter required for extraction of water. Use wet filter bag or polythene bag if necessary. Wet filter bags separate the water from the sucked up solids when extracting dirty water. Polythene bags simplify disposal of the dirt and prevent dirt from collecting in the tank.



Extraction of drilling sludge when wet drilling with REMS drill stands:
REMS Pull 2 L Set W

Supply format

REMS Pull 2 Set. Electric dry and wet extractor for commercial use. For extraction of dusts, dirt and liquids. Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69¹⁾. Bypass motor 230 V, 50–60 Hz, 1,200 W. On/Off switch with selection for automatic filter cleaning. Suction power switch for continuous adjustment of the air flow ≤ 143 m³/h. Filling level limiting with automatic switch-off for wet suction. Automatic filter cleaning. Appliance socket for power tools up to 2,200 W, with electronic automatic on/off. Large tank capacity 31 l, filling volume for liquids 17 l. Mobile, 2 wheels, castor/castor with brake. Connecting cable 7.5 m. 1 felt filter bag, 1 flat pleated filter PES. Flat suction attachment wet/dry 300 mm with rollers, brush strips, rubber lips. Joint attachment. Pull 2 suction hose/power tool adapter. Integrated holders for connecting cable, suction hose and accessories. In a box.

Description	Version	Art.-No.
Pull 2 L Set	Dust class L. Exposure limit/work place limit > 1 mg/m ³ , penetration level ≤ 0.1 %, 2 metal suction pipes 0.5 m each, handle, 4 m suction hose, suction hose connection nozzle.	185600
Pull 2 L Set W	REMS Pull 2 L set with water suction device. Ideal for extraction of drilling sludge when wet drilling with REMS drill stands.	185603
Pull 2 M Set	Dust class M. Exposure limit/work place limit > 0.1 mg/m ³ , penetration level ≤ 0.1 %. Electronic volume flow monitor with acoustic signal. Selector switch for suction hose diameter. Stopper for the suction hose connection nozzle. Antistatic system with 2 electrically conductive metal suction pipes 0.5 m each, E handle, 4 m E suction hose, suction hose connection nozzle. 1 polythene bag.	185601
Pull 2 M Set D	REMS Pull 2 M Set including suction rotor for dust extraction. Ideal for extracting health hazardous dusts when dry drilling with REMS Picus S1, Picus SR, Picus S3 etc.	185604

Extraction of health hazardous dusts when chasing and cutting:
REMS Pull 2 L Set



REMS Pull 2 L Set



Safety extractor of dust class L



REMS Pull 2 M Set



Safety extractor of dust class M

Accessories

Description	Art.-No.
Felt filter bag (pack of 5) , polyester felt, 3-ply, tear-proof, for wet and dry extraction, M-certified, for normal dirt, fine dusts, abrasive dusts, wet dirt	185511
Wet filter bag (pack of 5) , paper-polyester woven felt, tear-proof, for wet and dry extraction, for abrasive dusts, wet dirt, liquids	185512
Polythene bag (pack of 10) , for wet and dry extraction of non-health hazardous dusts, for normal dirt, fine dusts, abrasive dusts, wet dirt, liquids. Prevents soiling of the tank.	185513
Flat folded filter PES , polyester, nano-coated, 1 piece, water-resistant, non-rotting, washable with water. For wet and dry extraction, M-certified	185515
Suction rotor for dust extraction see page 309	180160
Water suction device see page 309	183606



¹⁾ Observe the national regulations for the collection and disposal of health hazardous dusts.




PRESS

Drying
Dehumidifying
Aeration and deaeration



**Air dehumidifier/
building dryer**

326



Construction ventilators

328

Powerful, highly efficient air dehumidifiers/building driers for drying rooms, e.g. after mains water damage, flooding, dehumidification of damp cellar rooms etc. and for fast drying of concrete, masonry, plaster and screed for example. For commercial use in trade and industry.

REMS Secco 50

Dehumidification rate $\leq 50 \text{ l}/24 \text{ h}$
Air volume $\leq 265 \text{ m}^3/\text{h}$

REMS Secco 80

Dehumidification rate $\leq 80 \text{ l}/24 \text{ h}$
Air volume $\leq 850 \text{ m}^3/\text{h}$

REMS Secco – for drying and dehumidification.

Universal use

Powerful, highly efficient air dehumidifiers/building driers for drying rooms, e.g. after mains water damage, flooding, dehumidification of damp cellar rooms etc. and for fast drying of concrete, masonry, plaster and screed for example. For commercial use in trade and industry.

Design Secco 50

Compact, handy construction in robust, plastic housing. Weight 21 kg. Large air extraction areas with washable air filter. Electronic hygrostat for regulating the desired humidity: Switches off automatically on reaching the nominal humidity, switches back on automatically when humidity rises. Upward air outlet for optimum air circulation. Condensation draining into an internal 7.7 l condensation tank, hose extendible from the rear, for draining condensation into a tank to be provided or directly into the drain system. Automatic switch-off with switch-off signal when using the internal 7.7 litre condensation tank on reaching the maximum condensation filling level. Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer, as an accessory. Sturdy plastic housing with castors for easy transport.

Design Secco 80

Compact, handy construction in robust, powder-coated sheet steel housing. Weight 51 kg. Large air extraction areas with washable air filter. Electronic hygrostat for regulating the desired humidity: Switches off automatically on reaching the nominal humidity, switches back on automatically when humidity rises. Side air outlet for optimum air circulation. Hose for draining condensation into an internal 11.5 l condensation tank (accessory), extendible at the side, for draining condensation into a tank to be provided or directly into the drain system. On/Off switch for operation with and without internal 11.5 litre condensation tank. Automatic switch-off with switch-off signal when using the internal 11.5 litre condensation tank on reaching the maximum condensation filling level. Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer. Device socket for detachable connecting cable. Practical compartment for the connecting cable during transport. Sturdy, mobile tubular steel frame with large castors for easy transport, also over steps. Easy glide down and pull-up of the machine over the back of the tubular steel frame, e.g. from and onto the loading platform of a vehicle.

Chiller unit Secco 50

High dehumidification rate by high quality chiller unit with highly efficient rotation compressor and high-performance capacitor motor 230 V, 760 W with electronic thawing system, for continuous operation. Very quiet running, also suitable for living rooms. Dehumidification rate $\leq 50 \text{ l}/24 \text{ h}$, air volume $\leq 265 \text{ m}^3/\text{h}$. High quality coolant R-290.

Chiller unit Secco 80

High dehumidification rate by high quality chiller unit with highly efficient rotation compressor and high-performance condensation motor 230 V, 680 W with automatic hot-gas thawing system, for continuous operation. Very quiet running, also suitable for living rooms. Dehumidification rate $\leq 80 \text{ l}/24 \text{ h}$, air volume $\leq 850 \text{ m}^3/\text{h}$. High quality coolant R-290.

Electronic control unit Secco 50

Large, illuminated control panel with clear display of actual and nominal humidity, operating state of the chiller unit, thawing function. Keys for setting the desired humidity in 5% steps between 30% and 90% as well as for setting the continuous operation. Keys for 2 fan speeds. Key for timer. Memory function saves the settings for automatic continuation of operation after a power failure.

Electronic control unit Secco 80

Illuminated 3" display with LCD technology, 70 mm screen diagonal, with clear display of actual and nominal humidity, operating hours, operating state of the chiller unit, the thawing function, the compressor protection function and the operating position for internal 11.5 litre condensation tank. Keys for setting the desired humidity in 1% steps between 30% and 90% as well as for setting the continuous operation. Memory function saves the settings for automatic continuation of operation after a power failure.

Condensation tank with pump Secco 50 and Secco 80

Condensation tank with condensation pump for pumping the condensation out of the condensation tank into a higher tank or a wash basin, as an accessory.



Exhaust air set Secco 80

Generously dimensioned exhaust air hose \varnothing 200 mm, 10 m long, with metal fastening eyes for hanging up on site, with connecting flange, for distribution of the exhaust air in the room, for dehumidifying cavities, e.g. above intermediate ceilings and for additional blowing of wet surfaces (accessory).

REMS Orkan

For supporting electric dehumidifiers/construction driers. For faster drying and dehumidification after floods and water mains damage, it is an advantage to improve the air exchange with electric construction ventilators REMS Orkan (page 328).

Supply format

REMS Secco 50 Set. Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and capacitor motor 230V, 50 Hz, 760W, with automatic thawing system, for continuous operation. Very quiet running. Dehumidification rate \leq 50 l/24 h, air volume \leq 265 m³/h. Electronic control unit with large, illuminated display and memory function. Electronic humidity switch. Air filter. Internal 7.7 l condensation tank. In sturdy plastic housing with casters. In a carton.

	Art.-No.	
	132011	

Other voltages on request.

Supply format

REMS Secco 80 Set. Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and capacitor motor 230V, 50 Hz, 680W, with automatic hot-gas thawing system, for continuous operation. Very quiet running. Dehumidification rate \leq 80 l/24 h, air volume \leq 850 m³/h. Electronic control unit with illuminated 3" display and memory function. Electronic hygrostat, operating hours counter, electricity meter. Air filter. In a sturdy sheet steel housing on a mobile tubular steel frame with large castors. In a carton.

	Art.-No.	
	132010	

Other voltages on request.

Accessories

Description	Art.-No.	
11.5 litre condensation tank Secco 80 for discharge of condensation in the sheet steel housing. For REMS Secco 80.	132100	
Exhaust air set Secco 80 , consisting of exhaust air hose \varnothing 200 mm, 10 m long, with metal fastening eyes for hanging up on site, with connecting flange, for distribution of the exhaust air in the room, for dehumidifying cavities, e.g. above intermediate ceilings and for additional blowing of wet surfaces.	132104	
Condensation tank with Secco 50 pump for pumping the condensation out of the condensation tank into a higher tank or a wash basin. Pumping height \leq 2 m. For REMS Secco 50.	132129	
Condensation tank with Secco 80 pump for pumping the condensation out of the condensation tank into a higher tank or a wash basin. Pumping height \leq 2 m. For REMS Secco 80.	132121	
Operating hours counter and electricity meter , e.g. for reporting to the damage regulator/customer. For REMS Secco 50 and others.	132132	
REMS Detect W , dielectric moisture measuring device for non-destructive moisture measurement in building materials, e.g. concrete, masonry, plaster, wood. In a case.	132115	
REMS Orkan , electric construction ventilator, see page 328.		



Info



Info



Powerful, highly efficient electric construction ventilator for supporting dehumidifiers/construction driers after floods and water mains damage. Ideal for aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms and for speeding up the drying of concrete, masonry, plaster and screed, for example. For commercial use in trade and industry.

REMS Orkan 1360

Air volume	1360 m ³ /h
Power	145 W

REMS Orkan 2050

Air volume stage I	1740 m ³ /h
Power stage I	355 W
Air volume stage II	2050 m ³ /h
Power stage II	450 W

REMS Orkan – for aeration.

Universal use

Powerful, highly efficient construction ventilator for supporting dehumidifiers/construction driers after floods and water mains damage. Ideal for aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms and for speeding up the drying of concrete, masonry, plaster and screed, for example. For commercial use in trade and industry.

Design Orkan 1360

Axial fan in sturdy plastic housing of rotation-moulded polyethylene for a long life. Compact, handy design, weighing only 6.8 kg, with low-noise, single-phase capacitor motor 230 V, 145 W, with practical handle for carrying. Generated air volume 1,360 m³/h.

Large-diameter exhaust air and suction hose, Ø 200 mm, 10 m long, e.g. for extracting air from rooms, spaces, shafts and cavities, for discharging sucked-in air or dusts to the outside and for inflating bouncy castles, hot-air balloons, for example, as an accessory. An exhaust and suction hose can be fitted to the aeration or deaeration side of the construction ventilator as the situation requires. Dust sack, Ø 200 mm, 2,980 mm long, washable, for collecting coarse and fine dusts up to dust class M, as an accessory.

Design Orkan 2050

Turbo radial fan with 2 air volume stages, in sturdy plastic housing of rotation-moulded polyethylene for a long life. Compact, handy design, weighing only 10 kg, with low-noise, single-phase capacitor motor 230 V, 355/450 W, with practical handle for carrying. Horizontal air outlet, adjustable to below 45° or vertical by appropriate resting surfaces on the plastic housing. Generated air volume in 2 selectable stages 1,740/2,050 m³/h. Especially suitable for speeding up drying of concrete, masonry, plaster and screed, for example.



Supply format

REMS Orkan 1360. Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms, for supporting the drying of, e.g., concrete, masonry, plaster and screed and for inflating bouncy castles, hot air balloons, for example. Capacitor motor 230V, 50 Hz, 145W, for continuous operation. Very quiet running. Air volume 1,360 m³/h. In a sturdy plastic housing. In a carton.

Art.-No.	
132300	

Other voltages on request.



Info

Supply format

REMS Orkan 2050. Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms. Especially also for drying of, e.g., concrete, masonry, plaster and screed. Capacitor motor 230V, 50 Hz, 355/450 W, for continuous operation. Very quiet running. Air volume 1,740/2,050 m³/h. In a sturdy plastic housing. In a carton.

Art.-No.	
132301	

Other voltages on request.



Info

Accessories

Description	Art.-No.
Exhaust air and suction hose, Ø 200 mm, 10 m long, for extracting air from rooms, spaces, shafts and cavities, for discharging sucked-in air or dusts to the outside and for inflating bouncy castles, hot-air balloons, for example. For REMS Orkan 1360.	132307
Dust sack, Ø 200 mm, 2,980 mm long, washable, for collecting coarse and fine dusts up to dust class M. For REMS Orkan 1360.	132308
Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer. For REMS Orkan and others.	132132
REMS Detect W, dielectric moisture measuring device for non-destructive moisture measurement in building materials, e.g. concrete, masonry, plaster, wood. In a case.	132115
REMS Secco, electric air dehumidifiers/building driers, see page 326.	



Index

A

Aeration and deaeration.....	325
Akku-Press 14 V.....	188–189
Akku-Press 14 V ACC.....	190–191
Akku-Press 22 V ACC.....	192–193
Akku-Press 22 V ACC Connected.....	194–195
Akku-Press XL 45 kN 22 V ACC.....	196–197
Amigo.....	25
Amigo 2.....	26
Amigo 2 Compact.....	27
Amigo 22 V.....	28–29
Amigo E.....	24
Aquila 3B.....	105
Aquila WB.....	105
Assembling.....	103
Attachment heads for button dies / intermediate rings / guide bushings.....	31
Axial Press Jointing.....	241
Ax-Press 25 22 V ACC.....	244–245
Ax-Press 25 L 22 V ACC.....	244–245
Ax-Press 30 22 V.....	242
Ax-Press HK / H.....	243

B

Bending.....	127
Bending formers and back formers.....	143
Blitz.....	264
Brazing solder ISO 17672-CuP 179.....	265
Butt welding machine.....	292–295
Butt welding units.....	296

C

Cable shear.....	239
Calc-Push.....	116
CamScope HD.....	273
CamSys.....	274–275
CamSys 2.....	276–278
Cat 22 V VE.....	62–63
Catch S.....	104
Catch W.....	104
Cat VE.....	61
Cento.....	86–87
Cento 22 V.....	88–89
Chain pipe vice.....	105
Chain pipe vice for workbench.....	105
Chamfering.....	75
Chasers.....	44
Chasers and Holders.....	44
Circular pipe sawing machine.....	72
CleanH.....	119, 123
Cleaning.....	113
Cleaning and preservation unit for heating systems.....	119, 123
Cleaning pads.....	262
CleanM.....	123
Cobra 22/32.....	284–287
Collum.....	51
Collum 22 V.....	52–53
Compression heads.....	246–247
Confirmation of suitability.....	237
Contact 2000.....	263
Cordless axial press 13 kN with automatic return.....	244–245
Cordless axial press 20 kN with automatic return.....	244–245
Cordless axial press 30 kN.....	242
Cordless die stock with quick-change die heads.....	28–29
Cordless drain cleaning machine.....	282–283
Cordless LED flood light.....	111
Cordless pipe cutter.....	85
Cordless pipe cutting machine.....	88
Cordless pipe expander 20 kN with automatic return.....	252–253
Cordless pipe reciprocating saw.....	68–69
Cordless power drill/screwdriver.....	108–109
Cordless radial press 22 kN with automatic circuit control.....	147–151
Cordless radial press 32 kN with automatic circuit control.....	190–191
Cordless radial press 32 kN with automatic circuit control and pressure monitoring.....	192–193
Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display.....	194–195
Cordless radial press 32 kN with switch-off signal.....	188–189
Cordless radial press XL 45 kN with automatic circuit control.....	196–197
Cordless roll grooving machine.....	52–53
Cordless tube bender.....	132–133, 140–141
Cordless universal reciprocating saw.....	62–63
Cropping tongs.....	239
Cropping tongs Mini.....	181
Curvo.....	136–137
Curvo 22 V.....	140–141
Curvo 50.....	138–139
Cut 110 Cu-INOX.....	97
Cut 110 P.....	96
Cutter wheels.....	83
Cutting.....	75
Cu-Vlies.....	262

D

Deburring.....	75
Dehumidifying.....	325
Diamond chasing and cutting machine.....	299
Diamond chasing and cutting machines.....	320–321
Diamond core drilling.....	299
Dies.....	30, 40
Disinfecting.....	113
Disinfection unit for drinking water installations.....	119, 123
Drain cleaner for manual and electric operation.....	280
Drill stands.....	308
Dry and wet extractor.....	322–323
Dry diamond core drilling crowns LS.....	317
Drying.....	325
DueCento.....	90–91

E

Eco-Press.....	182
Electric air dehumidifiers/building driers.....	326–327, 329
Electric construction ventilator.....	328–329
Electric decalcifying pump.....	116
Electric diamond core drilling machine.....	300–303, 306–307
Electric diamond core drilling machine with micro-pulse technology.....	314–315
Electric diamond core drilling machine with speed regulation.....	304–305
Electric die stock with quick-change die heads.....	24–27
Electric drain cleaning machine.....	281
Electric filling and flushing unit.....	124–125
Electric LED flood light.....	110
Electric pipe and drain cleaning machines.....	284–285
Electric pipe and tube bender.....	136–139
Electric pipe cutter.....	84
Electric pipe freezing unit.....	269
Electric pressure testing pump.....	115
Electric radial press 32 kN.....	183
Electric reciprocating pipe saws.....	64–65
Electric sleeve welding unit.....	290
Electric soldering pliers.....	262
Electric soldering unit.....	263
Electric tube expander.....	258–259
Electric tube extractor.....	257, 259
Electro-hydraulic pipe expander 34 kN with automatic return.....	254
Electro-hydraulic radial press 32 kN with automatic retraction.....	185
Electro-hydraulic radial press 32 kN with switch-off signal.....	184
Electro-hydraulic radial press XL 32 kN with automatic retraction.....	186
Electronic camera inspection system.....	274–277
Electronic flushing and pressure testing unit with compressor.....	120–123
Electronic flushing unit with compressor.....	117–119
EMSG 160.....	290
Endoscope camera.....	272–273
E-Push 2.....	115
Eskimo.....	268
Eva.....	22
Expander heads P.....	255
Expander heads P-CEF.....	255
Expanding.....	249
Ex-Press 22 V ACC.....	252–253
Ex-Press Cu.....	250
Ex-Press H.....	251
Ex-Press P.....	251
Extracting.....	249

F

Filling.....	113
Flushing.....	113
Folding work bench.....	72–73
Folding work benches.....	106
Freezing.....	267
Frigo 2 F-Zero.....	269

H

Hand die stock with quick-change die heads.....	22
Hand pressure testing pump.....	114
Hand tube bender.....	142
Hand tube expander.....	250–251
Hand tube extractor.....	256
Helix 22 V VE.....	108–109
Herkules.....	107
Hold-Harmless and Indemnification Agreement.....	238
Hot Dog 2.....	262
Hurrican.....	257
Hurrican H.....	256
Hydro-Swing.....	130–131
Hydro-Swing 22 V.....	132–133

I

Inner pipe deburrer.....	99
--------------------------	----

J

Jumbo.....	106
------------	-----

Index

K

Krokodil 125/180 SR 320–321

L

Lot Cu 3 265
Lot P6 265
Lumen 2800 22V 111
Lumen 5000/7000/10000 110

M

Machine cleaner 123
Macho 264
Magnum RG 54–55
Magnum (up to 2") 34–35
Magnum (up to 3") 36–37
Magnum (up to 4") 38–39
Manual axial press 243
Manual radial press 182
Material supports 107
Mini-Cobra 280
Mini-Cobra S 281
Mini-Cobra S 22V VE 282–283
Mini-Press 14V ACC 147
Mini-Press 22V ACC 148–149
Mini-Press S 22V ACC 150–151
MiniScope 272
MSG 291
Multi-Push S 117–119
Multi-Push SL/SLW 120–123

N

Nano 84
Nano 11 V 85
Nippelfix 48
Nippelspanner 48
NoCor 119, 123

O

Oil-hydraulic hand pipe bender 130–131
Oil-hydraulic pipe bender 134–135
One-hand axial press 243
One-hand pipe expander 251
One-hand pipe shears 92–94
One-hand pipe shears with ratchet feed 95
Orkan 1360/2050 328–329
Outer-inner pipe deburrer 100–101
Outer-inner tube deburrer 99

P

Paste Cu 3 265
Perox Color 119, 123
Picus DP 314–315
Picus S1 300–301
Picus S2/3,5 306–307
Picus S3 302–303
Picus SR 304–305
Pipe and Drain cleaning 271
Pipe and Drain inspection 271
Pipe chamfering tools 98
Pipe cutter 82
Pipe cutters 76–81
Pipe cutting and pipe chamfering tool 96
Pipe cutting machine 86–87, 90
Pipe cutting tool 97
Pipe freezer 268
Pipe shears with ratchet feed 95
Pipe splitter 82
Plastic Pipe Welding 289
Pneumatic reciprocating pipe saw 66
Portable pipe workstation with chain pipe vice 105
Power-Ex-Press P-CEF ACC 254
Power-Press 184
Power-Press ACC 185–186
Power-Press SE 183
Preserving 113
Pressing rings 152–180, 198–235
Pressing tongs 198–235
Pressing tongs Mini 152–180
Pressure testing 113
Pull 2 L / M 322–323
Pull-Push 280
Puma VE 60
Push 114
Python 134–135

Q

Quick-change die heads 30
Quick-change die heads S 23

R

Radial Press Jointing 145
RAG 98
RAS Cu 79–80
RAS Cu-INOX 77–78
RAS P 80–81
RAS P/SW 45/L 82
RAS St 76
RAS W INOX 82
Reciprocating saws 58–59
REG 3–35 99
REG 8–35 100
REG 10–42 100
REG 10–54 101
REG 10–54 E 101
REG St ¼–2" 99
REG Universal 99
Roll Grooving 21
Roll grooving attachment 50
Roll grooving machine 51, 54–55
ROS P 94–95
ROS P 26/SW 35 S 93
ROS PEX 94
ROS P flex 92

S

Sanitol 49
Saw blades 71
Sawing 57
Secco 50/80 326–327
Single-hand tube bender 128–129
Sinus 142
Sleeve welding units 291
Soft solder paste of solder powder Sn97Cu3 according to ISO 9453:2014 and flux 3.1.1.C, EN 29454-1:1994 265
Soft solder Sn97Cu3, ISO 9453:2014 265
Solar-Push 124–125
Soldering 261
Special saw blades 70
Spezial 49
SSG 296
SSM 160KS 293
SSM 160RS 292
SSM 250KS 294
SSM 315RF 295
Suction and pressure cleaning device 280
Swedish pattern wrench 'S' 104
Swing 128–129

T

Thread-cutting oil 49
Threading 21
Threading machine 32–39, 42–43, 46–47
Thread tables 45
Tiger 22V VE 68–69
Tiger pneumatic 66
Tiger /VE/SR 64–65
Tile drilling 318
Tornado 32–33
Turbo Cu-INOX 72
Turbo K 73
Turbo soldering torch acetylene 264
Turbo soldering torch propane 264
Twist 258
Twist/Hurrican 259

U

Unimat 75 42–43
Unimat 77 46–47
Universal circular metal sawing machine with automatic cooling lubricant unit 73
Universal deburrer 99
Universal diamond core drilling crowns 310–311
Universal diamond core drilling crowns LS 312–313
Universal electric reciprocating saw 60–61
Universal saw blades 70

V

V-Jet H 119, 123
V-Jet TW 119, 123

W

Water pump pliers 104
Wet and dry suction 299

List of articles

Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page
043054	Z		119, 122, 125	115602	Z		119, 123	150025	H		251	151140	Z		256-257, 259
045159	Z		119, 122	115604	Z		119, 123	150026	H		251	151145	Z		256-257, 259
047069	Z		122	115605	Z	6	119, 123	150027	H		251	151150	Z		256-257, 259
074021	Z		256	115607	Z	6	119, 123	150028	H		251	151155	Z		256-257, 259
074041	Z		256	115608	Z	6	119, 123	150029	H		251	151160	Z		256-257, 259
076117	Z		256	115609	Z		119, 122	150033	H		251	151165	Z		256-257, 259
079003	Z		309, 311, 313, 316-317	115610	M		122	150100	Z		250	151170	Z		256-257, 259
079005	Z		309, 316	115611	M		122	150105	Z		250	151175	Z		256-257, 259
079006	Z		309, 316	115612	Z		119, 123	150110	Z		250	151200	Z		256-257, 259
079010	Z		309, 316	115621	Z		119, 122	150120	Z		250	151210	Z		256-257, 259
079012	Z		309, 311, 313, 316-317	115633	Z		119, 122	150125	Z		250	151230	Z		256-257, 259
079013	Z		309, 316	115661	Z		122	150130	Z		250	151240	Z		256-259
079018	Z		309, 316	115667	Z		122	150140	Z		250	151402	Z		256-259
079019	Z		309, 316	115677	Z		119, 123	150145	Z		250	151600	Z		257-259
090015	Z		119, 123	115703	Z		119, 123	150150	Z		250	151615	Z		290
091072	Z		119, 123	115747	Z		122	150155	Z		250	151618	Z		256
091073	Z		119, 123	115810	M		118	150160	Z		250	152106	Z		264
110000	Z		48	115900	M		116	150165	Z		250	152109	Z		264
110100	Z		48	116000	H		104	150170	Z		250	153020	H		129
110200	Z		48	116005	H		104	150175	Z		250	153021	H		129
110300	Z		48	116010	H		104	150180	Z		250	153022	H		129
110400	Z		48	116015	H		104	150185	Z		250	153023	H		129
110500	Z		48	116020	H		104	150190	Z		250	153025	H		129
110600	Z		48	116050	H		104	150195	Z		250	153026	H		129
110620	Z		48	116055	H		104	150205	Z		250	153027	H		129
110621	Z		48	116060	H		104	150210	Z		250	153028	H		129
111000	Z		48	120120	Z		107	150220	Z		250	153029	H		129
111100	Z		48	120125	Z		107	150225	Z		250	153030	H		128
111200	Z		48	120130	Z		107	150230	Z		250	153100	Z		129
111300	Z		48	120200	Z		106	150235	Z		250	153115	Z		129, 131, 133
111400	Z		48	120240	Z		106	150240	Z		250	153125	Z		129
111500	Z		48	120250	Z		105	150245	Z		250	153140	Z		129
111620	Z		48	120270	Z		105	150250	Z		250	153155	Z		129, 131, 133
111621	Z		48	130002	H		268	150500	Z		250	153160	Z		129, 131, 133
111700	Z		48	130207	Z		268	150510	Z		251	153170	Z		129, 131, 133
111800	Z		48	130208	Z		268	150515	Z		253, 255	153175	Z		129, 131, 133
111900	Z		48	130209	Z		268	150550	H		251	153180	Z		129, 131, 133
113000	H		76	130383	Z		268	150600	Z		250-251	153185	Z		129, 131, 133
113100	H		76	130410	Z		268	150806	Z		255	153190	Z		129, 131, 133
113200	H	10	77	130415	Z		268	150807	Z		255	153195	Z		129, 131, 133
113210	V	10	78, 83, 96-97	130430	Z		268	150808	Z		255	153200	Z		129, 131, 133
113213	V	10	78, 83	130450	Z		268	150809	Z		255	153205	Z		129, 131, 133
113220	V	10	83	130455	Z		268	150812	Z		255	153210	Z		129, 131, 133
113225	V	10	80, 83	130460	Z		268	150826	Z		255	153265	Z		128-129
113230	H	10	77	130465	Z		268	150828	Z		255	153270	Z		129
113240	H	10	77	130470	Z		268	150842	Z		255	153300	Z		128
113241	H	10	77	130475	Z		268	150843	Z		255	153303	Z		128
113250	H	10	79	130480	Z		268	150845	Z		255	153304	Z		128
113255	H	10	79	130485	Z		268	150846	Z		255	153305	Z		128
113260	H	10	79	130490	Z		268	150849	Z		255	153306	Z		128
113300	H	10	78	130495	Z		268	150855	Z		255	153307	Z		128
113320	H	8	79	131012	M		269	150858	Z		255	153400	Z		133
113330	H	8	77	131104	Z		269	150868	Z		255	153401	E		133
113340	H	10	79	131110	Z		269	150873	Z		255	153410	E		133
113350	H	10	77	131116	Z		269	150882	Z		255	153411	E		133
113351	H	10	77	131156	Z		269	150883	Z		255	153412	E		133
113360	Z		78, 80, 99	131157	Z		269	150885	Z		255	153413	E		133
113370	H		80	131158	Z		269	150886	Z		255	153414	E		133
113380	H		78	131160	Z		269	150887	Z		255	153415	E		133
113400	H		78	132010	M		327	150888	Z		255	153416	E		133
113401	H		78	132011	M		327	150894	Z		255	153417	E		133
113410	H		80	132100	Z		327	150897	Z		255	153418	E		133
113450	H		82	132104	Z		327	150912	Z		255	153419	E		132
113461	V		82-83	132115	Z		327, 329	150913	Z		255	153455	Z		133
113480	H		82	132121	Z		327	150914	Z		255	153500	Z		131
113481	Z		82	132129	Z		327	150915	Z		255	153501	Z		131, 133
113500	H		78	132132	Z		327, 329	150916	Z		255	153510	H		131
113810	H		100	132300	M		329	150923	Z		255	153520	H		131
113815	Z		100	132301	M		329	150926	Z		255	153521	H		131
113825	H	10	100	132307	Z		329	150943	Z		255	153522	H		131
113830	H	10	101	132308	Z		329	150944	Z		255	153523	H		131
113835	H	10	101	140100	V	4	49	150945	Z		255	153525	H		131
113840	Z		87, 89	140101	V		49	150946	Z		255	153526	H		131
113900	H	10	99	140103	V		49	150947	Z		255	153527	H		131
113910	H	10	99	140105	V	12	49	150950	Z		255	153528	H		131
115000	H		114	140106	V	15	49	150952	Z		255	153529	H		131
115001	H		114	140110	V	4	49	150957	Z		255	153531	Z		131, 133
115045	Z		114-115, 122	140113	V		49	150958	Z		255	153532	Z		131, 133
115110	Z		114-115	140115	V	12	49	150960	Z		255	153540	Z		131, 133
115140	Z		122	140116	V	15	49	150961	Z		255	153570	Z		131
115217	Z		125	140119	V	15	123	150962	Z		255	154000	Z		142
115220	Z		125	140120	V	15	137, 139, 141-142	150963	Z		255	154001	H		142
115221	Z		125	150000	H		250	150968	Z		255	154002	H		142
115311	M		125	150005	H		250	151000	E		257	154003	H		142
115312	M		125	150006	H		250	151002	E		257	154004	H		142
115314	Z		125	150007	H		250	151003	H		256	154010	H		142
115315	Z		125	150008	H		250	151004	H		256	154160	Z		142
115319	Z		125	150010	H		250	151005	H		256	156000	E		258
115323	Z		125	150017	H		250	151010	E		257	156002	E		258
115324	Z		125	150018	H		250	151105	Z		256-257, 259	156004	E		258
115325	Z		125	150019	H		250	151110	Z		256-257, 259	156010	E		259
115326	Z		125	150020	H		250	151120	Z		256-257, 259	156012	E		259
115375	Z		125	150021	H		251	151125	Z		256-257, 259	156014	E		259
115500	M		115	150022	H		251	151130	Z		256-257, 259	156150	Z		258-259

List of articles

Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page
156200	Z		258-259	174205	Z		286	181415	V		313	252103	Z		292-293
156225	Z		258-259	174210	Z		286	181420	V		313	254025	M		294
156250	Z		258-259	174250	Z		287	181425	V		313	254103	Z		294
156300	Z		258-259	174265	Z		287	181430	V		313	255020	M		295
156350	Z		258-259	174270	Z		287	181435	V		313	255103	Z		295
156375	Z		258-259	174275	Z		287	181440	V		313	256020	E		291
156400	Z		258-259	174282	Z		287	181445	V		313	256213	E		291
156425	Z		258-259	174291	Z		287	181450	V		313	256220	E		291
156450	Z		258-259	174293	Z		287	181455	V		313	256233	E		291
156475	Z		258-259	174295	Z		287	181459	V		313	256240	E		291
160010	H		264	174296	Z		287	181460	V		313	256242	Z		291
160200	V	10	265	174305	Z		287	181465	V		313	256320	E		291
160210	V	10	265	174306	Z		287	181470	V		313	256342	Z		291
160220	V	10	265	174310	Z		287	181475	V		313	256400	Z		291
160300	V	25	262	174311	Z		287	181480	V		313	256410	Z		291
161010	H		264	174340	Z		287	181500	V		317	256420	Z		291
163020	E		262	174341	Z		287	181502	V		317	256430	Z		291
163350	Z		262	175000	Z		275	181504	V		317	256440	Z		291
164011	E		263	175007	M		275	181506	V		317	256450	Z		291
164050	E		263	175008	M		275	181508	V		317	256460	Z		291
164110	Z		263	175010	M		275	181510	V		317	256470	Z		291
164111	Z		263	175011	Z		275	181512	V		317	256480	Z		291
164115	Z		263	175018	Z		275	181514	V		317	256490	Z		291
164250	Z		263	175026	Z		275, 278	181516	V		317	256500	Z		291
170010	H		280	175057	Z		275, 278	181518	V		317	256510	Z		291
170011	Z		286	175058	Z		275, 278	181520	V		317	256520	Z		291
170012	Z		286	175123	Z		275, 278	181522	V		317	256530	Z		291
170022	E		281	175210	Z		111	181524	V		317	261001	E		290
170023	E		281	175211	Z		111	181526	V		317	290000	H		81
170025	E		283	175220	Z		110	181528	V		317	290001	H	10	80
170026	E		283	175221	Z		110	181530	V		317	290002	H	10	80
170107	Z		283	175222	Z		110	181532	V		317	290016	V	10	81, 83
170200	Z		280, 286	175230	Z		110-111	181700	V		318	290023	V	10	81, 83
170201	Z		280-281, 283	175300	Z		278	181710	V		318	290050	H		81
170205	Z		280-281, 283	175301	M		277	181711	V		318	290100	H		81
170300	H		280	175302	M		277	181712	V		318	290116	V	10	81, 83
171150	Z		286	175303	M		277	181713	V		318	290200	H		81
171151	Z		286	175304	M		277	181714	V		318	290216	V	10	81, 83
171200	Z		286	175305	Z		275, 278	181715	V		318	290300	H		81
171201	Z		286	175306	Z		275, 278	182006	Z		309	290316	V	5	81, 83
171205	Z		286	175307	Z		278	182010	Z		309, 316	290400	H		96
171210	Z		286	175308	Z		278	182050	Z		309, 316	290410	H		97
171250	Z		287	175312	Z		278	183000	Z		305	290411	H		97
171265	Z		287	175323	Z		278	183010	E		305	290412	H		97
171270	Z		287	175330	Z		278	183022	E		305	290420	Z		96
171275	Z		287	175339	Z		278	183023	E		305	290421	Z		96
171280	Z		287	175343	Z		278	183600	Z		308, 316	290422	Z		96
171290	Z		287	175400	E		273	183603	Z		309, 316	290423	Z		96
171291	Z		287	175401	E	6	272	183604	Z		309, 316	290424	Z		96
171305	Z		287	175440	Z		273	183605	Z		309, 316	290425	Z		96
171306	Z		287	180000	Z		301	183606	Z		309, 323	290426	Z		96
171340	Z		287	180001	Z		303	183607	Z		309, 316	290427	Z		96
171341	Z		287	180003	Z		315	183632	Z		305, 308	290430	Z		96
172000	Z		285	180010	E		301	183670	Z		309, 316	290431	Z		96
172010	M		285	180011	E		303	183675	Z		309	290432	Z		96
172011	M		285	180012	E		307	183700	Z		308, 316	290433	Z		96-97
172012	M		285	180015	Z		309, 311, 313, 316-317	185000	E		321	290437	Z		96
172050	Z		286	180016	E		315	185001	Z		321	290440	Z		96-97
172051	Z		286	180028	E		303	185010	E		321	290444	Z		96
172150	Z		286	180029	E		303	185011	E		321	290445	Z		96
172151	Z		286	180030	E		307	185021	V		321	290446	Z		96
172154	Z		286	180032	E		301	185022	V		321	290447	Z		96
172200	Z		286	180033	E		315	185024	Z		321	290448	Z		96
172201	Z		286	180035	E		315	185026	V		321	290449	Z		96
172203	Z		286	180036	E		315	185027	V		321	291000	H		95
172205	Z		286	180052	Z		311, 313	185054	Z		321	291010	H		95
172210	Z		286	180053	Z		311, 313	185058	Z		281, 321	291023	Z		95
172250	Z		287	180054	Z		311, 313	185511	Z		323	291036	Z		95
172265	Z		287	180056	Z		311, 313	185512	Z		323	291037	Z		95
172270	Z		287	180140	Z		309	185513	Z		323	291101	H		95
172275	Z		287	180145	Z		316	185515	Z		323	291112	Z		95
172280	Z		287	180155	Z		309, 311, 313, 316-317	185600	M		323	291200	H		95
172281	Z		287	180160	Z		309, 323	185601	M		323	291201	Z		95
172290	Z		287	180600	Z		301, 303, 305, 315	185603	M		323	291220	H		95
172291	Z		287	181010	V		311	185604	M		323	291221	Z		95
172293	Z		287	181015	V		311	190051	Z		109	291240	H	8	94
172305	Z		287	181020	V		311	190053	Z		109	291241	Z		94
172310	Z		287	181025	V		311	190100	Z		109	291242	H	8	93
172340	Z		287	181030	V		311	190110	E		109	291243	Z		93
172341	Z		287	181035	V		311	250020	E		296	291244	Z		93
172610	Z		287	181040	V		311	250041	Z		296	291250	H		95
172611	Z		287	181045	V		311	250042	Z		296	291251	Z		95
172612	Z		287	181050	V		311	250120	E		296	291270	H		95
174000	Z		285	181055	V		311	250142	Z		296	291271	Z		95
174010	M		285	181059	V		311	250143	Z		296	291290	H		95
174011	M		285	181060	V		311	250220	E		296	291400	H	10	92
174012	M		285	181065	V		311	250242	Z		296	291401	Z		92
174050	Z		286	181070	V		311	250243	Z		296	291410	H	10	92
174101	Z		286	181075	V		311	250320	E		296	291411	Z		92
174150	Z		286	181080	V		311	250341	Z		296	291420	H	8	94
174154	Z		286	181085	V		311	250342	Z		296	291421	Z		94
174200	Z		286	181090	V		311	250343	Z		296	291430	H	8	92
174201	Z		286	181095	V		311	252026	M		292	291431	Z		92
174203	Z		286	181410	V		313	252046	M		293	292011	Z		98

List of articles

Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page
292110	H		98	344150	Z		33, 35, 37, 39, 55	521122	S		30	561001	V		70
292210	H		98	347000	M		33, 35, 37, 39, 50	521130	Z		30	561002	V		70
340100	Z		37, 39	347001	M		50	521132	S		30	561003	V		70
340110	Z		55	347005	M		53	521140	Z		30	561004	V		70
340200	M		33	347006	M		51	521142	S		30	561005	V		70
340201	M		33	347007	Z		50	521150	Z		30	561006	V		70
340202	M		33	347008	M		51	521152	S		30	561007	V		70
340206	M		33	347009	M		51	521160	Z		30	561008	V		70
340207	M		33	347010	Z		51	521162	S		30	561101	V		71
340208	M		33	347030	Z		50	521170	Z		30	561102	V		71
340220	M		35	347034	Z		50	521172	S		30	561103	V		71
340221	M		35	347035	Z		50	521180	Z		30	561104	V		71
340222	M		35	347040	Z		50	521182	S		30	561105	V		71
340226	M		35	347046	Z		50	521200	Z		30	561106	V		71
340227	M		35	347047	Z		50	521202	S		30	561107	V		71
340228	M		35	347053	Z		50	521210	Z		30	561108	V		71
340230	M		55	380303	M		37	521212	S		30	561109	V		71
340231	M		55	380304	M		37	521220	Z		30	561110	V		71
340232	M		55	380305	M		37	521222	S		30	561111	V		71
341000	Z		33, 35, 37, 39	380306	M		37	521230	Z		30	561112	V		71
341401	S		40	380307	M		37	521232	S		30	561113	V		71
341402	S		40	380308	M		37	521240	Z		30	561114	V		71
341403	S		40	380309	M		37	521242	S		30	561115	V		71
341404	S		40	380310	M		37	521250	Z		30	561116	V		71
341406	S		40	380311	M		37	521252	S		30	561117	V		71
341407	S		40	380312	M		37	521260	Z		30	561118	V		71
341408	S		40	380313	M		37	521262	S		30	561119	V		71
341409	S		40	380314	M		37	521270	Z		30	561120	V		71
341411	S		40	380426	M		39	521272	S		30	561121	V		71
341412	S		40	380427	M		39	521280	Z		30	561122	V		71
341413	S		40	380428	M		39	521282	S		30	561123	V		71
341414	S		40	380429	M		39	521300	Z		30	561124	V		71
341416	S		40	380430	M		39	521302	S		30	561125	V		71
341417	S		40	380431	M		39	521310	Z		30	561126	V		71
341418	S		40	380441	M		39	521312	S		30	563000	Z		65-66, 69
341419	S		40	380442	M		39	521320	Z		30	563008	Z		65-66
341426	S		40	380443	M		39	521322	S		30	563100	Z		65-66
341427	S		40	380444	M		39	521330	Z		30	563200	Z		65-66
341428	S		40	380445	M		39	521332	S		30	565051	Z		73
341429	S		40	380446	M		39	521340	Z		30	566030	Z		29, 63, 69, 141
341430	S		40	380447	M		39	521342	S		30	566051	Z		60-61, 65-66
341431	S		40	380448	M		39	521350	Z		30	570100	Z		200, 205-207, 210-211, 215, 217, 221, 226-229, 232, 234
341432	S		40	381000	Z		37, 39	521352	S		30	570107	Z		200, 205-206, 208, 210, 218, 226-228, 232-234
341433	S		40	381050	Z		37	522000	Z		22-27, 29	570110	Z		200-203, 205-212, 214-218, 221-230, 232, 234-235
341434	S		40	381401	S		40	522051	Z		23	570112	Z		205, 226-227, 234
341435	S		40	381405	S		40	526050	Z		22	570115	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341436	S		40	381410	S		40	526052	Z		23	570117	Z		205, 226-227, 234
341437	S		40	381415	S		40	530000	Z		25	570120	Z		200-203, 205-212, 214-218, 221-229, 232, 234-235
341438	S		40	381430	S		40	530003	Z		24	570125	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341439	S		40	381431	S		40	530004	Z		29, 53	570130	Z		200-203, 205-212, 214-218, 221-230, 232, 234-235
341440	S		40	381432	S		40	530013	E		24	570132	Z		226-227, 232-233
341441	S		40	381433	S		40	530014	E		24	570135	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341442	S		40	381622	V	5	37, 39, 76, 83	530015	E		29	570137	Z		226-227, 232-233
341443	S		40	520003	H		22	530016	E		29	570140	Z		200-203, 205-212, 214-218, 221-230, 232, 234-235
341444	S		40	520004	H		22	530020	E		25	570145	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341445	S		40	520008	H		22	530022	E		25	570150	Z		200-203, 205-212, 214-218, 221-230, 232, 234-235
341446	S		40	520009	H		22	530023	E		25	570155	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341466	S		40	520010	H		22	533000	Z		24-25	570160	Z		202, 207, 211-212, 214, 217, 228-229, 232, 234-235
341467	S		40	520013	H		22	536000	Z		24-25	570165	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341468	S		40	520014	H		22	540000	Z		26	570170	Z		202, 207, 211-212, 214, 217, 228-229, 232, 234-235
341469	S		40	520015	H		22	540001	Z		27	570175	Z		200, 205-206, 208-210, 212, 217-220, 225-228, 232-235
341470	S		40	520016	H		22	540002	E		26	570280	Z		183-185
341471	S		40	520017	H		22	540022	E		26	570290	Z		236
341472	S		40	520025	Z		23	540023	E		27	570295	Z		236, 239
341473	S		40	520026	Z		23	540024	E		27	570300	Z		200, 202-204, 210, 230
341474	S		40	520056	Z		23	540025	E		27	570310	Z		203-204, 208, 213, 216, 219, 223-224, 230-231
341475	S		40	521000	Z		30	541401	Z		31				
341476	S		40	521002	S		30	541404	Z		31				
341477	S		40	521010	Z		30	541406	Z		31				
341478	S		40	521012	S		30	541410	Z		31				
341479	S		40	521020	Z		30	541413	Z		31				
341480	S		40	521022	S		30	541414	Z		31				
341481	S		40	521026	Z		23	541415	Z		31				
341482	S		40	521030	Z		30	541416	Z		31				
341483	S		40	521032	S		30	543000	Z		26				
341484	S		40	521036	Z		23	543010	Z		27, 29				
341485	S		40	521040	Z		30	543100	Z		24-26, 65-66				
341486	S		40	521042	S		30	546000	Z		26-27				
341487	S		40	521046	Z		23	560000	Z		65				
341488	S		40	521050	Z		30	560001	Z		65				
341489	S		40	521052	S		30	560002	Z		66				
341490	S		40	521056	Z		23	560003	Z		60				
341491	S		40	521060	Z		30	560004	Z		61				
341493	S		40	521062	S		30	560008	Z		65				
341494	S		40	521066	Z		23	560010	E		63				
341495	S		40	521070	Z		30	560011	Z		69				
341496	S		40	521072	S		30	560020	E		65				
341497	S		40	521080	Z		30	560022	E		66				
341498	S		40	521082	S		30	560023	E		60				
341499	S		40	521100	Z		30	560026	E		65				
341614	V	10	33, 35, 37, 39, 76, 83	521102	S		30	560027	E		65				
342080	S		35, 37, 39	521110	Z		30	560040	E		61				
344100	Z		33, 35, 37, 39, 55	521112	S		30	560052	E		63				
344105	Z		33, 35, 37, 39, 55	521120	Z		30	560053	E		69				

List of articles

Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page
573360	Z		247	574752	Z		154, 158-164, 167-169, 173-175, 178-180, 200, 205-206, 208-210, 212, 217-220, 225-228, 232-235	578330	Z		158, 174, 179	578472	Z		154-157, 159, 161, 163, 165-166, 169, 172-173, 177, 180
573364	Z		247					578332	Z		154, 158-164, 167-169, 173-175, 178-180	578474	Z		154-157, 159, 161, 163, 165-166, 169, 172-173, 177
573367	Z		247					578334	Z		154, 158-164, 167-169, 173-175, 178-180	578476	Z		154-157, 159, 161, 163, 165-166, 169, 172-173, 177
573370	Z		247	574754	Z		174, 178, 226-227, 232-233	578336	Z		154, 158-164, 167-169, 173-175, 178-180	578478	Z		159, 162, 165-166, 173
573400	Z		247					578338	Z		174, 178	578480	Z		178
573402	Z		247	574756	Z		154, 158-164, 167-169, 173-175, 178-180, 200, 205-206, 208-210, 212, 217-220, 225-228, 232-235	578340	Z		174, 178	578482	Z		157, 162, 171, 178, 180
573404	Z		247					578342	Z		162, 164-165, 171	578484	Z		157, 162, 171, 178, 180
573406	Z		247					578344	Z		157, 164-165, 178	578486	Z		178
573430	Z		242	574758	Z		154, 158-164, 167-169, 173-175, 178-180, 200, 205-206, 208-210, 212, 217-220, 225-228, 232-235	578346	Z		162, 164-165, 180	578488	Z		157, 162, 171, 178, 180
573432	Z		242					578348	Z		157-160, 162-168, 171-172, 175-177, 179-180	578490	Z		154, 156-157, 170, 172, 177
573434	Z		242	574760	Z		154, 158-164, 167-169, 173-175, 178-180, 200, 205-206, 208-210, 212, 217-220, 225-228, 232-235	578350	Z		159, 162, 165, 171	578492	Z		154, 156-161, 164, 168-170, 172, 176-177
573436	Z		242					578352	Z		154-173, 175-180	578494	Z		154, 156-161, 164, 168-170, 172, 176-177
573438	Z		242	574762	Z		154, 158-164, 167-169, 173-175, 178-180, 200, 205-206, 208-210, 212, 217-220, 225-228, 232-235	578354	Z		159-160, 162, 164-165, 167, 171, 175, 178, 180	578496	Z		154, 156-161, 164, 168-170, 172, 176-177
573439	Z		242					578356	Z		154-160, 162-172, 175-177, 180	578498	Z		154, 156, 158-161, 164, 168-170, 176-177
573440	Z		242	574782	Z		154-157, 159-173, 175-180, 200-220, 222-225, 228-232, 234-235	578358	Z		154-173, 175-180	578510	Z		174-175
573441	Z		242					578360	Z		154-160, 162-169, 172, 175-176, 179-180	578512	Z		174
573442	Z		247	574788	Z		154-157, 159-173, 175-180, 200-220, 222-225, 228-232, 234-235	578362	Z		154-173, 175-180	578514	Z		163, 173-175
573443	Z		247					578364	Z		154-173, 175-180	578516	Z		174
573444	Z		247	574792	Z		160	578366	Z		155, 157, 165-166, 176-177	578518	Z		163, 173-175
573445	Z		246	574794	Z		154-173, 175-180, 200-217, 219-220, 222-225, 228-232, 234-235	578370	Z		164, 171, 180	578520	Z		163, 173-175
573446	Z		246					578372	Z		157, 160, 162, 164, 167-169, 172, 179	578522	Z		163, 173-175
573447	Z		246	574798	Z		154-157, 159-173, 175-180, 200-220, 222-225, 228-232, 234-235	578374	Z		154-173, 176-180	578524	Z		168
573448	Z		246					578376	Z		154-160, 162-164, 166-172, 176-177	578526	Z		168
573449	Z		246					578378	Z		154-173, 176-180	578528	Z		168
573450	Z		246					578380	Z		154, 156-172, 176-180	578530	Z		168
573451	Z		246					578382	Z		154-173, 176-180	578532	Z		155, 179-180
573452	Z		247					578384	Z		154, 156-157, 159-161, 163-173, 175-180	578534	Z		155, 179-180
574000	H		182					578386	Z		154, 156-157, 159-161, 163-173, 175-180	578536	Z		155, 179-180
574300	H		243					578390	Z		154-156, 158-168, 170-176, 178-180	578538	Z		155, 179-180
574302	H		243	574800	Z		158, 179, 205, 234	578392	Z		154-156, 159, 161, 164-167, 169, 172-173, 176-178	578540	Z		155, 179-180
574352	Z		243	574802	Z		158, 179, 205, 234	578394	Z		168	578550	Z		178
574430	Z		182	574804	Z		161, 171, 209, 222	578396	Z		154, 156-157, 162, 177	578552	Z		154, 178-179
574436	Z		84-85, 182	574806	Z		161, 171, 209, 222	578398	Z		156-157, 160, 164, 167-168, 171-172, 176-177	578554	Z		154, 178-179
574437	Z		243	574808	Z		161, 171, 209, 222	578400	Z		154-169, 171-173, 176-177, 180	578556	Z		178-179
574516	Z		180, 236	575010	Z		253	578402	Z		167	578568	Z		157, 159, 163, 167-169, 178
574700	Z		180	575017	E		254	578404	Z		154-160, 163-164, 166-169, 171-172, 176-177	578570	Z		157, 159, 163, 167-169, 178
574702	Z		236	575020	E		253	578406	Z		154-169, 171-173, 176-177, 180	578572	Z		171
574704	Z		180, 236	575021	E		253	578408	Z		154-158, 163-166, 168-169, 176-177, 180	578574	Z		177, 180
574728	Z		155-159, 161-163, 165-166, 169, 171-173, 177, 180, 201, 204-205, 207, 209-210, 212, 214, 216, 220, 223-225, 231, 235	575100	Z		254	578410	Z		154-169, 171-173, 176-177, 180	578576	Z		177, 180
				575252	Z		253	578412	Z		154-169, 171-173, 176-177, 180	578578	Z		177, 180
574730	Z		155-159, 161-163, 165-166, 169, 171-173, 177, 180, 201, 204-205, 207, 209-210, 212, 214, 216, 220, 223-225, 231, 235	575253	Z		253	578420	Z		170	578580	Z		177
				575256	Z		253	578426	Z		170	578582	Z		177, 180
574732	Z		155-157, 159, 161-163, 165-166, 169, 171, 173, 177, 180, 201, 204-205, 207, 209-210, 212, 214, 216, 220, 223, 225, 231, 235	575278	Z		254	578430	Z		170	578584	Z		177, 180
				576000	Z		193	578432	Z		170	578586	Z		177, 180
574734	Z		155, 157-159, 161-163, 165-166, 169, 171, 173, 180, 201, 204-205, 207, 209-210, 212, 214, 216, 220, 223, 225, 235	576003	Z		195	578434	Z		172	578588	Z		165, 171
				576010	E		193	578436	Z		172	578590	Z		165, 171
574736	Z		154, 158, 160-162, 165, 167, 170, 174-176, 178-179, 200, 205-207, 210-211, 215, 217, 221, 226-229, 232, 234	576011	E		193	578438	Z		172	578592	Z		161, 166, 171, 177
				576014	E		195	578440	Z		172	578594	Z		161, 166, 171, 177
574738	Z		154-156, 158-168, 170-176, 178-180, 200-203, 205-212, 214-218, 221-229, 232, 234-235	576015	E		195	578442	Z		172	578596	Z		161, 166, 171, 177
				577000	Z		185	578444	Z		162	578598	Z		161, 166, 171, 177
574740	Z		154-156, 158-168, 170-176, 178-180, 200-203, 205-212, 214-218, 221-229, 232, 234-235	577001	Z		184	578446	Z		162	578600	Z		161, 166, 171, 177
				577010	E		185	578448	Z		162	578602	Z		177
574742	Z		154-156, 158-168, 170-176, 178-180, 200-203, 205-212, 214-218, 221-230, 232, 234-235	577011	E		184	578450	Z		162	578604	Z		154, 158-164, 167-169, 173-175, 178-180
				577012	E		184	578452	Z		162	578606	Z		157, 159, 163, 167-169, 178
574744	Z		154-156, 158-168, 170-176, 178-180, 200-203, 205-212, 214-218, 221-230, 232, 234-235	577013	E		185	578454	Z		172	578608	Z		154
				578001	Z		147	578456	Z		155-159, 161-163, 165-166, 169, 171-173, 177, 180	578610	Z		154
574746	Z		154-156, 158-168, 170-176, 178-180, 200-203, 205-212, 214-218, 221-230, 232, 234-235	578002	Z		149	578458	Z		158-159, 166, 169, 172	578612	Z		154, 156
				578003	Z		151	578460	Z		155-159, 161-163, 165-166, 169, 171-173, 177, 180	578614	Z		154
574748	Z		154, 158-162, 168, 174-175, 178-179, 200, 205-206, 208, 210, 218, 226-228, 232-234	578010	E		149	578462	Z		155-157, 159, 161-163, 165-166, 169, 171, 173, 177, 180	578616	Z		176
				578012	E		147	578464	Z		155, 157-159, 161-163, 165-166, 169, 171, 173, 180	578618	Z		181
574750	Z		174, 178, 226-227, 232-233	578013	E		147	578466	Z		156-157, 172	578620	Z		181
				578014	E		149	578468	Z		154-157, 159, 161, 163, 165-166, 169, 172-173, 177, 180	578622	Z		181
				578015	E		151	578470	Z		156-157, 159, 163, 166, 169, 172	578624	Z		154-160, 162-173, 176-180
				578016	E		151					578630	Z		160-161, 168, 171, 178
				578290	Z		147, 149, 151, 245, 253					578632	Z		160-161, 168, 171, 178
				578295	Z		180-181					578634	Z		160-161, 168, 171, 178
				578299	Z		147, 149, 151					578636	Z		161, 168, 171, 178
				578310	Z		154, 158, 160-162, 165, 167, 170, 174-176, 178-179					578638	Z		156, 158, 160
				578312	Z		154-156, 158-168, 170-176, 178-180					578640	Z		169, 178
				578314	Z		154-156, 158-168, 170-176, 178-180					578642	Z		169, 178
		</													

List of articles

Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page	Art.-No.	RG	VE	Page
578700	Z		158	581110	Z		143	751050	Z		43, 47	759363	S		44
578702	Z		158	581130	Z		143	751060	Z		43, 47	759364	S		44
578704	Z		158	581150	Z		143	751070	Z		43, 47	759365	S		44
578706	Z		158	581180	Z		143	751080	Z		43	759366	S		44
578708	Z		158	581200	Z		143	751090	Z		43	759367	S		44
578710	Z		158	581210	Z		143	751096	Z		43	759368	S		44
578712	Z		158	581220	Z		143	751097	Z		43	759370	S		44
578714	Z		158	581230	Z		143	751098	Z		43	759371	S		44
578716	Z		165	581240	Z		143	751100	Z		43	759372	S		44
578718	Z		165	581260	Z		143	751102	Z		43	759373	S		44
578720	Z		165	581270	Z		143	751501	S		44	759374	S		44
578740	Z		171, 180	581280	Z		143	751502	S		44, 47	759375	S		44
578742	Z		171, 180	581310	Z		143	751503	S		44, 47	759376	S		44
578744	Z		171, 180	581320	Z		143	751504	S		44	759377	S		44
578746	Z		171, 180	581330	Z		143	751505	S		44	759378	S		44
579000	Z		186	581350	Z		143	751506	S		44, 47	759379	S		44
579001	Z		197	581370	Z		143	751507	S		44, 47	759380	S		44
579010	E		186	581380	Z		143	751508	S		44	759381	S		44
579012	E		186	581390	Z		143	751509	S		44	759382	S		44
579014	E		197	581400	Z		143	751510	S		44	759383	S		44
579100	Z		205, 221, 225-227, 229, 234	581410	Z		143	751511	S		44	759384	S		44
579101	Z		200-203, 205-212, 214-218, 221-229, 232, 234-235	581420	Z		143	751516	S		44	770003	U		47
579104	Z		208	581430	Z		143	751517	S		44	770004	U		47
579105	Z		208	581440	Z		143	751518	S		44	771000	Z		47
579106	Z		208	581450	Z		143	751519	S		44	771110	S		47
579107	Z		209-211, 227-228	581460	Z		143	751520	S		44	771120	S		47
579108	Z		205, 217, 221, 227-229, 234	581470	Z		143	751521	S		44	771130	S		47
579109	Z		221, 229, 234	581480	Z		143	751522	S		44	771136	S		47
579110	Z		200-203, 205-212, 214-218, 221-229, 232, 234-235	581490	Z		143	751523	S		44	771140	S		47
579111	Z		200-203, 205-212, 214-218, 221-229, 232, 234-235	581500	Z		143	751524	S		44	771160	S		47
579112	Z		232	581510	Z		143	751525	S		44	771170	S		47
579113	Z		232	581520	Z		143	751526	S		44	771180	S		47
579114	Z		232	581530	Z		143	751527	S		44	771186	S		47
579120	Z		186, 236	581540	Z		143	751528	S		44	771190	S		47
579123	Z		197, 236	582036	Z		137, 139, 141-142	751544	S		44	771210	S		47
579240	Z		186	582110	Z		139	751545	S		44, 47	771220	S		47
579600	Z		119, 123	582120	Z		139	751546	S		44, 47	771230	S		47
579601	Z		186, 197	586000	Z		137	751547	S		44, 47	771240	S		47
579603	Z		236	586012	Z		139	751548	S		44	771246	S		47
580000	Z		137, 142	586100	Z		137, 141	751549	S		44	771260	S		47
580004	Z		141	586150	Z		137, 141	751550	S		44, 47	771270	S		47
580010	E		137	590000	Z		135	751551	S		44, 47	771280	S		47
580014	E		141	590020	E		135	751552	S		44, 47	773060	Z		47
580020	E		137	590021	E		135	751557	S		44	844010	E		84
580021	E		137	590022	E		135	751558	S		44	844011	E		85
580022	E		137	590051	Z		135	751559	S		44	844045	Z		84-85
580023	E		137	590052	Z		135	751560	S		44	844050	Z		84-85
580024	E		137	590053	Z		135	751561	S		44	844051	Z		84-85
580025	E		137	590054	Z		135	751562	S		44	844510	Z		85
580026	E		137	590055	Z		135	751563	S		44	845001	M		87
580027	E		137	590056	Z		135	751564	S		44	845002	M		89
580028	E		137	590057	Z		135	751565	S		44	845003	M		87
580029	E		137	590058	Z		135	751566	S		44	845004	M		91
580030	E		137	590059	Z		135	751567	S		44	845050	Z		87, 89, 91
580031	E		137	590060	Z		135	751568	S		44	845051	Z		87, 89, 91
580033	E		137	590061	Z		135	751569	S		44	845052	Z		87, 89, 91
580034	E		137	590062	Z		135	751570	S		44	845053	Z		87, 89, 91
580035	E		137	590111	Z		135	751571	S		44	845054	Z		87
580036	E		137	590150	Z		135	753240	Z		43	845055	Z		87, 89, 91
580037	E		137	590153	Z		135	759250	S		44	845057	Z		91
580038	E		137	590160	Z		135, 139	759251	S		44	845060	Z		91
580039	E		137	731200	Z		31	759252	S		44	845110	Z		87, 89
580040	E		137	731205	Z		31	759253	S		44	845118	Z		87, 89
580051	E		141	731210	Z		31	759254	S		44	845131	Z		87
580052	E		141	731220	Z		31	759255	S		44	845218	Z		87, 89
580053	E		141	731230	Z		31	759256	S		44	845220	Z		87, 89, 91
580054	E		141	731240	Z		31	759257	S		44	845230	Z		91
580055	E		141	731250	Z		31	759258	S		44	845530	Z		87, 89
580056	E		141	731301	Z		31	759259	S		44	849006	M		72
580057	E		141	731302	Z		31	759260	S		44	849007	M		73
580058	E		141	731303	Z		31	759261	S		44	849310	Z		51, 53, 72-73, 87, 89
580059	E		141	731304	Z		31	759262	S		44	849315	Z		51, 53, 72-73, 87, 89
580060	E		141	731305	Z		31	759263	S		44	849700	Z		73
580061	E		141	731306	Z		31	759264	S		44	849703	Z		72-73
580062	E		141	731307	Z		31	759265	S		44	849706	Z		72-73
580063	E		141	731308	Z		31	759270	S		44				
580064	E		141	731309	Z		31	759271	S		44				
580065	E		141	731310	Z		31	759272	S		44				
580066	E		141	731311	Z		31	759273	S		44				
580067	E		141	731312	Z		31	759274	S		44				
580068	E		141	731320	Z		31	759275	S		44				
580069	E		141	731321	Z		31	759276	S		44				
580100	Z		139	731322	Z		31	759277	S		44				
580110	E		139	731323	Z		31	759278	S		44				
581070	Z		143	731324	Z		31	759279	S		44				
581080	Z		143	731325	Z		31	759280	S		44				
				731326	Z		31	759281	S		44				
				731700	Z		24-27, 29, 99	759282	S		44				
				750003	U		43	759330	S		44				
				750004	U		43	759360	S		44				
				751000	Z		43	759361	S		44				
				751040	Z		43, 47	759362	S		44				

REMS

www.rems.de

Head Office



Germany: REMS GmbH & Co KG
Postfach 1631 · 71306 Waiblingen · Germany
Stuttgarter Straße 83 · 71332 Waiblingen · Germany
Tel +49 7151 17 07-0 · Fax +49 7151 17 07-110
info@rems.de

Branch Offices



Denmark: REMS Scandinavia A/S
Snedkervej 1 · 4600 Køge · Denmark
Tel +45 56 63 14 00
DNK@rems.de



France: REMS SARL
2, Rue du Stade · 67250 Hoffen · France
Tel +33 388 80 44 53 · Fax +33 388 80 99 43
FRA@rems.de



Great Britain: REMS (U.K.) LIMITED
Unit 5 · Ash Industrial Estate
Flex Meadow · Harlow · Essex CM19 5TJ · U.K.
Tel +44 1279 413698 · Fax +44 1279 413704
GBR@rems.de



Italy: REMS S.R.L.
Via Sirtori, 13/D · 20017 Passirana di Rho (Milano) · Italy
Tel +39 02 9 30 21 11 · Fax +39 02 9 31 02 45
ITA@rems.de



Poland: REMS POLSKA Sp. z o.o.
Dąbrowa · Ulica Piaskowa 19 · 62-070 Dopiewo · Poland
Tel +48 61 654 09 00 · Fax +48 61 654 09 05
POL@rems.de



Spain: REMS ESPAÑA, S.A.U.
Pol. Ind. San José de Valderas
Calle Herramientas, 28 · 28918 Leganés (Madrid) · Spain
Tel +34 916 444 833 · Fax +34 916 430 155
ESP@rems.de



Czech Republic: REMS Česká republika s.r.o.
Nádražní 271 · 253 01 Hostivice · Czech Republic
Tel +420 2 20 98 28 80 · Fax +420 2 20 98 28 83
CZE@rems.de

Sale through specialist dealers.

