


GHS 175 x 4 x 5140 C

Stock Code : 43175451403

Reference No : 01-001

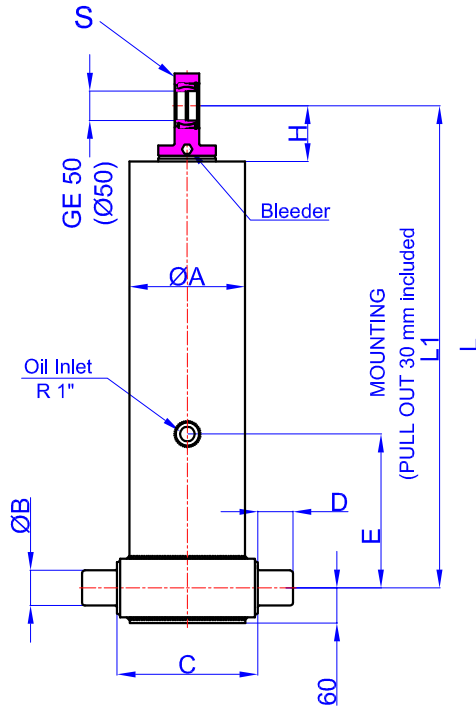


A	:	197	mm
B	:	60	mm
C	:	240	mm
D	:	60	mm
E	:	350	mm
H	:	95	mm
L	:	1597	mm
*L1	:	1627	mm
S	:	42	mm

* Inc 30 mm pull out :
tolerance +20 -0

Hard Chromed all stages

Working Pressure : 170 Bar
Max. Working Pressure : 190 Bar

All Cylinder Materials are St
52 Cold Drawn Tubes



STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø175	Ø154,5	Ø135	Ø116					
STROKE	1285	1285	1285	1285					5140
OIL DISPLACEMENT (L)	32,5	26	19,5	14,5					105
THRUST AT 170 BAR (TONS)	40	31	24	18					

BL (body length)

Ro (rear overhang)

Ycog (vert. pos. centre of gravity)

PI(Pivot length)

$\alpha^\circ = \text{st} \times 60$

PI

BL	6600			6400			6200		
Ro	200	500	800	200	500	800	200	500	800
α°	45	47	50	46	49	52	48	51	54
Ycog	600	49	54	61	50	56	64	55	63
	900	53	60	69	55	62	73	57	65
	1200	58	67	80	60	71	83	63	75
st	4950	4935	5000	4906	4981	5026	4960	5015	5040

Weight : 247 Kg


Drawing No : 43175451403-02-001

Bracket : 47000024-0001


R	:	60,8	mm
S	:	70	mm
T	:	219	mm
U	:	339	mm
V	:	80	mm
Y	:	152	mm
Z	:	368	mm

* Bracket are optional

Weight : 16,5 Kg

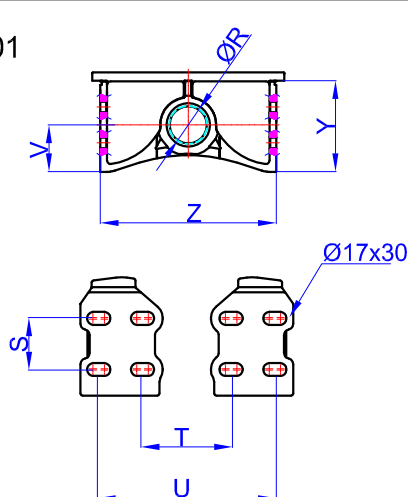

Top Clavis : 47000026-02-002

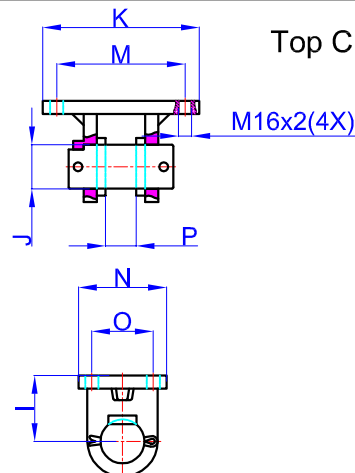

I	:	85	mm
J	:	50	mm
K	:	216	mm
M	:	184	mm
N	:	125	mm
O	:	95	mm
P	:	39	mm

* Bracket are optional