



ENERGY FOR LIFE



SB-350

DIESEL GENERATING SET 350 KVA

		Standby	Prime
Power	kVa	350	318.2
Power	kW	280	254.5
Rated speed	Rpm	1500	
Voltage	V	400/230	
Power factor	Cos Phi	0,8	

Continous power

Continuous working power under constant load. The average load value can be 100%. It cannot be overloaded.

Standby Power

Working power in limited time under variable load. With an average load of 70%, it can operate for a total of 200 hours a year. It is used as backup power in mains power outages. Cannot be overloaded.

Prime Power

Continuous working power under variable load. Average load value should be 70%. Every 12 hours

10% can be overloaded.



Engine

Brand	Baudouin	
Model	6M16G350/5	
Frequency	Hz	50
Standby Power	kW	320
Prime Power	kW	290
Displacement	lt.	9.72
Number of cylinders	6 In Line	
Rated Speed	rpm	1500
Aspiration	Turbocharged-Aftercooler	
Cooling Method	Water cooled	
Type	Direct injection	
Bore x Stroke	mmxmm	126 X 130
Governor type	Electronic	
Fuel Cons.	%100 lt.	70.5
Fuel Cons.	%50 lt.	35.3
Oil Capacity	lt.	26
Coolant Capacity	lt.	50
Voltage	V	12V/24V
Fuel Capacity	Lt.	585

Alternator

Voltage	V	230/400
Frequency	HZ	50
Automatic Voltage Regulation	±%	% 4, engine regulator 1,0 ±%
Standby	kVA	350
Prime	kVA	318.2
Power Factor	Cosφ	0,8
Insulation System	IP21 / H	
Warning system	Self excited	

DIMENSIONS

Silent type

W x L x H	mm	1400 x 3700 x 2650
Weight	kg	2700
Tank capacity	lt	585

Open type

W x L x H	mm	1400 x 3250 x 1750
Weight	kg	2290
Tank capacity	lt	585

Standard Features

Water cooled diesel engine
 Radiator and mechanical fan
 Protective cage that prevents touching rotating and hot parts
 Electric starter and charge alternator
 Battery, cables and stand
 Steel chassis and anti-vibration wedges

Electronic battery charger
 Operating and installation manual
 Alternator with single bearing and H insulation class
 Industrial capacity muffler and flexible steel compensator
 Flexible fuel connection hoses
 Engine water heater
 Fuel tank integrated into the chassis

CONTROL SYSTEM


DATAKOM D-300

The D-300 is a cost effective, modern technology genset controller ready for internet monitoring. Its main advantages are multifunctionality, support for multiple topologies, harmonic analysis and detailed power measurements.

Software features are complete with easy firmware upgrade through USB port.

The Windows based PC software allows monitoring and programming through USB, RS-232 and GPRS.

The Rainbow Scada web service allows monitoring and control of an unlimited number of gensets from a single central location.

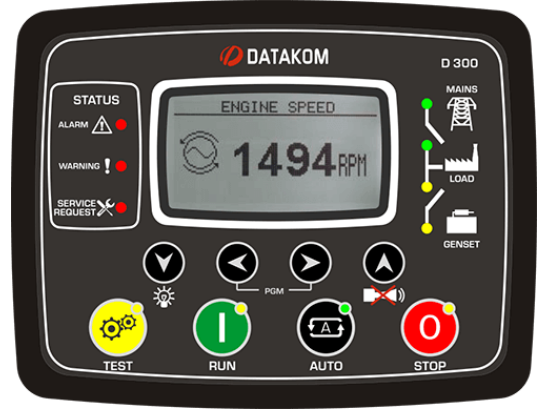

FUNCTIONS	COMMUNICATION	FEATURES	
AMF unit	4-band GPRS modem (optional)	Diesel and gas genset support	Dual mutual standby with equal aging of gensets
ATS unit	USB Device	400Hz operation support	Manual "speed fine adjust" on selected ECUs
Remote start controller	RS-232 (2400-57600baud)	400 event logs, full snapshot	Automatic fuel pump control
Manual start controller	J1939-CANBUS	All parameters front panel editable	Disable protections feature
Engine controller	Geo-locating through GSM	3 level configuration password	Excess power protection
Remote display panel	Internet Central Monitoring	128x64 graphical LCD display	Reverse power protection
	Free PC software: Rainbow Plus	Downloadable languages	Overload IDMT protection
	Modbus RTU	Waveform display of V & I	Load shedding, dummy load
	GPS support (RS-232)	Harmonic analysis of V & I	Multiple load management
		16Amp MCB & GCB outputs	Current unbalance protection
		8 configurable digital inputs	Voltage unbalance protection
		6 configurable digital outputs	Fuel filling & fuel theft alarms
		3 configurable analog inputs	Battery back-up real time clock
		Both CANBUS-J1939 & MPU	Idle speed control
		3 configurable service alarms	Battery charge run enabled
		Multiple automatic exerciser	Combat mode support
		Weekly operation schedule	