
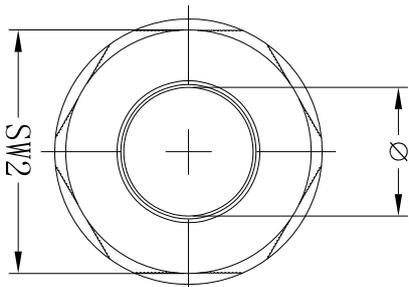
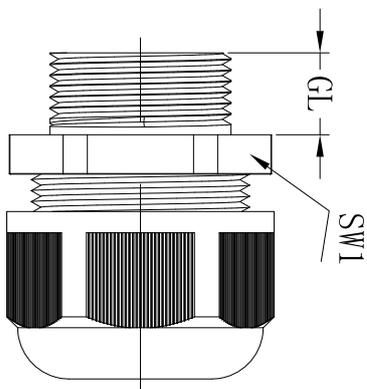


Metric	PG	Claping range(Ø)	SW1	GL	Type
	Pg7	3-6.5	15	8.2	DDL-PG7P
	Pg9	4-8	19	9	DDL-PG9P
	Pg11	5.5-10	22.5	9.7	DDL-PG11P
	Pg13.5	6-12.5	24	10	DDL-PG13.5P
	Pg16	8.5-14	27	11	DDL-PG16P
	Pg21	12.5-18	33	12	DDL-PG21P
	Pg29	17-25	42	12.5	DDL-PG29P
	Pg36	25-32.5	53	14.8	DDL-PG36P
	Pg42	31-41	61	16	DDL-PG42P
	M12x1.5	3-6.5	15	8	DDL-M12P
	M16x1.5	4-8	19	8.8	DDL-M16P
	M20x1.5	6-12	24	10	DDL-M20P
	M25x1.5	13-18	33	12	DDL-M25P
	M32x1.5	18-25	42	12	DDL-M32P
	M40x1.5	22-32	52.5	15	DDL-M40P
	M50x1.5	31-41	62.5	16	DDL-M50P
	M63x1.5	35-45	68	18	DDL-M63P

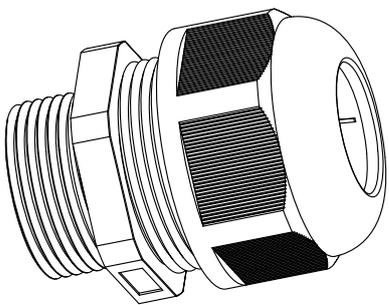

- Plastics Cable gland
1. Material: Nylon
 2. Seal Material: NBR
 3. Degree of protection: IP68
 4. Temperature range: -40~100°C

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL: /	SURFACE: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
MAT NO: /	STATUS: /	NAME: /	
APPD: Huang JS 2021.08.17	CHKD: Yang SH 2021.08.17	DRAWING NO.: /	
DRAFT: Zhou YZ 2021.08.17		TYPE: CUSTOMER DRAWING	
SIZE: A4	SCALE: /	REV: D0	
(mm) (inch)	SCALE: /	SHEET: 1/1	

D

C

B

A