WIFI module networking manual
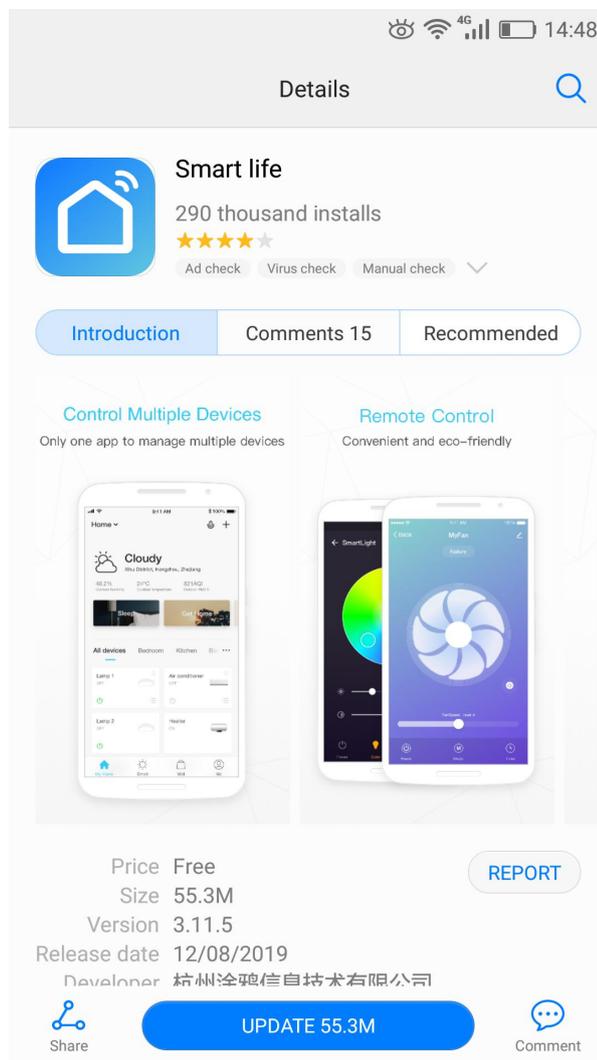
1. APP download and install:

- Scanning QC code with browser（for both Android and iOS）
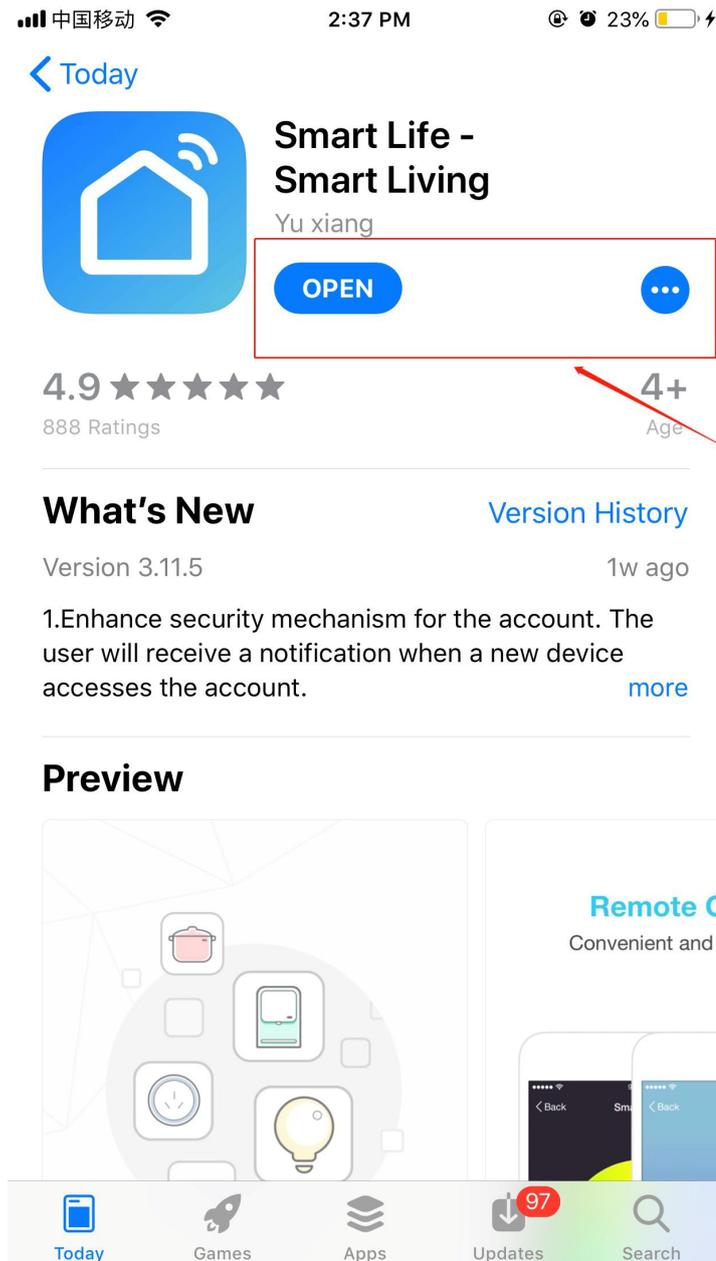

- Android System

● IOS System

2. Start the APP

● After the installation, click the "" icon on the desktop to start the software.

Smart Life

3. Register and setting

3.1、Register

● Users without account can apply by clicking the "Register" function on the login page: Register──→ Agree the privacy policy ──→Enter the mobile number──→Get the verification code──→ Enter the verification code──→Set the password ──→ Complete, as shown in the following figure:
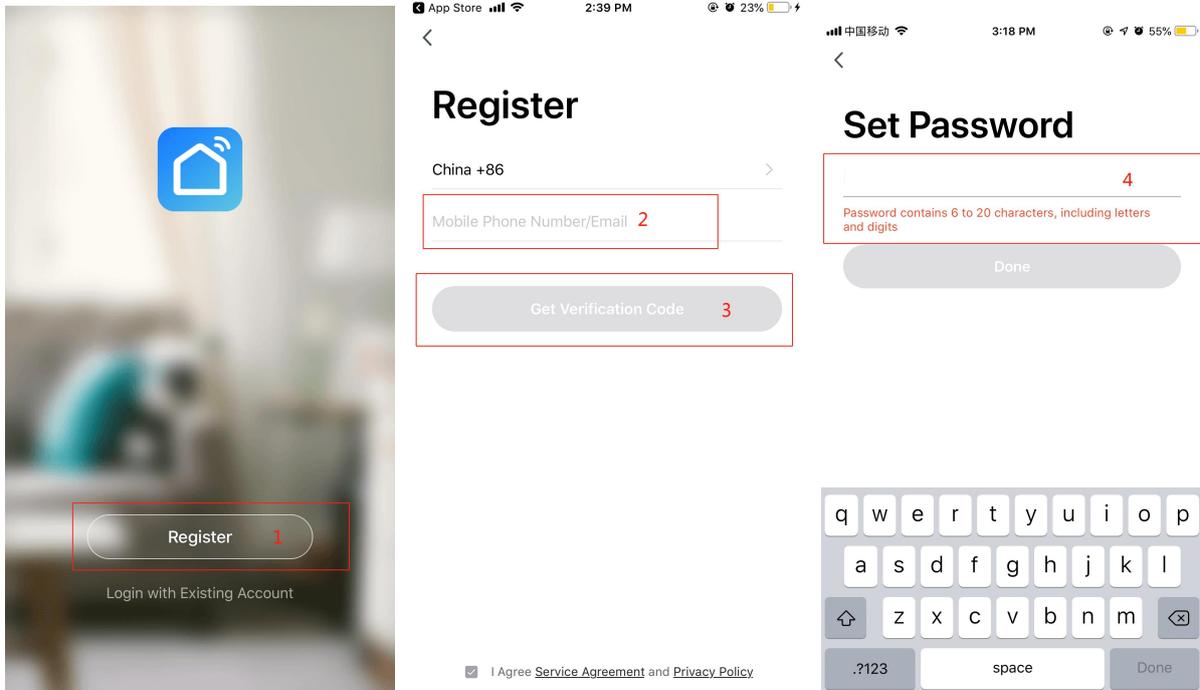
- After registration, you need to create a family: me → family management →family adding → family name setting → location setting → room adding → complete, the sequence as follows :
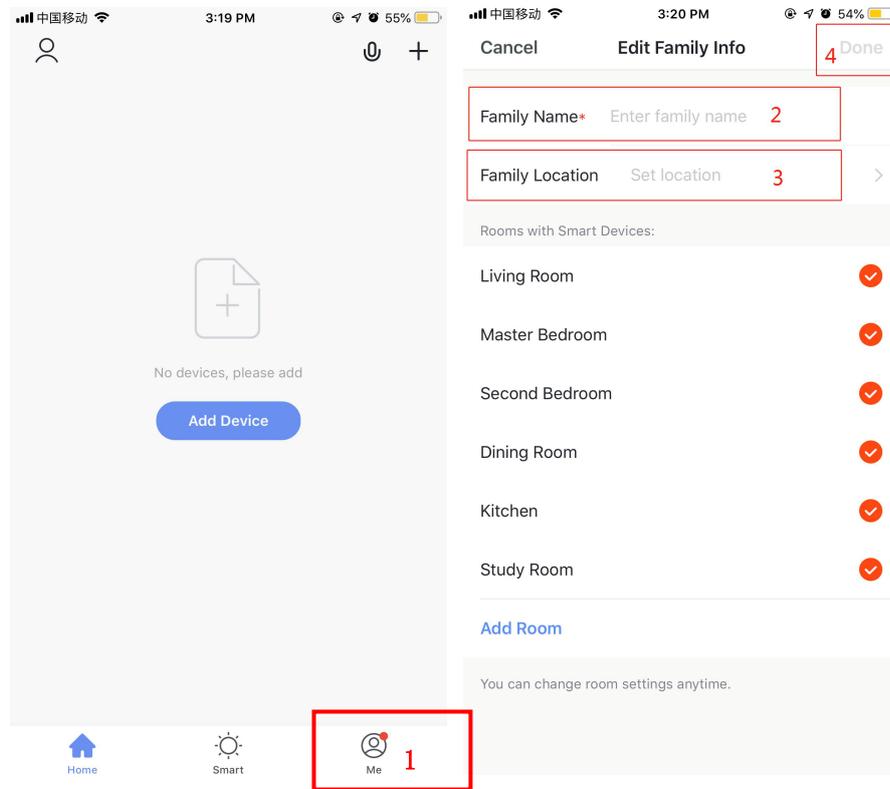
3.2、Login

- You can login directly if you have the account , the sequence as follows:
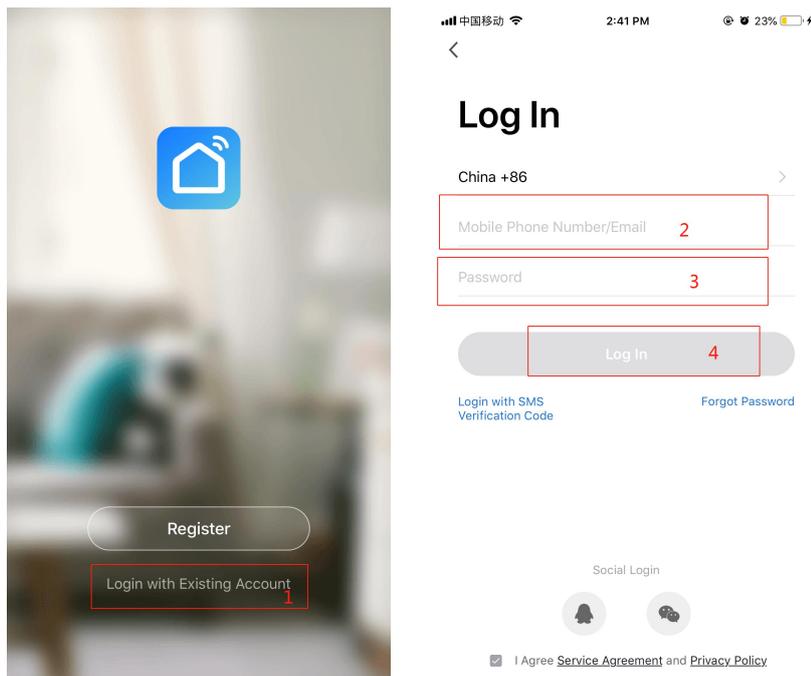
If you forget the passport ,you can choose the authentication number to login. Choose "authentication number logon" ⟶ "enter phone no" ⟶ "get the authentication number". As follow:

Log In

China +86

Mobile Phone Number/Email

Password

Log In

Login with SMS Verification Code   1   Forgot Password

Social Login

☑ I Agree Service Agreement and Privacy Policy

Login with SMS Verification Code

China +86

Mobile Phone Number/Email   2
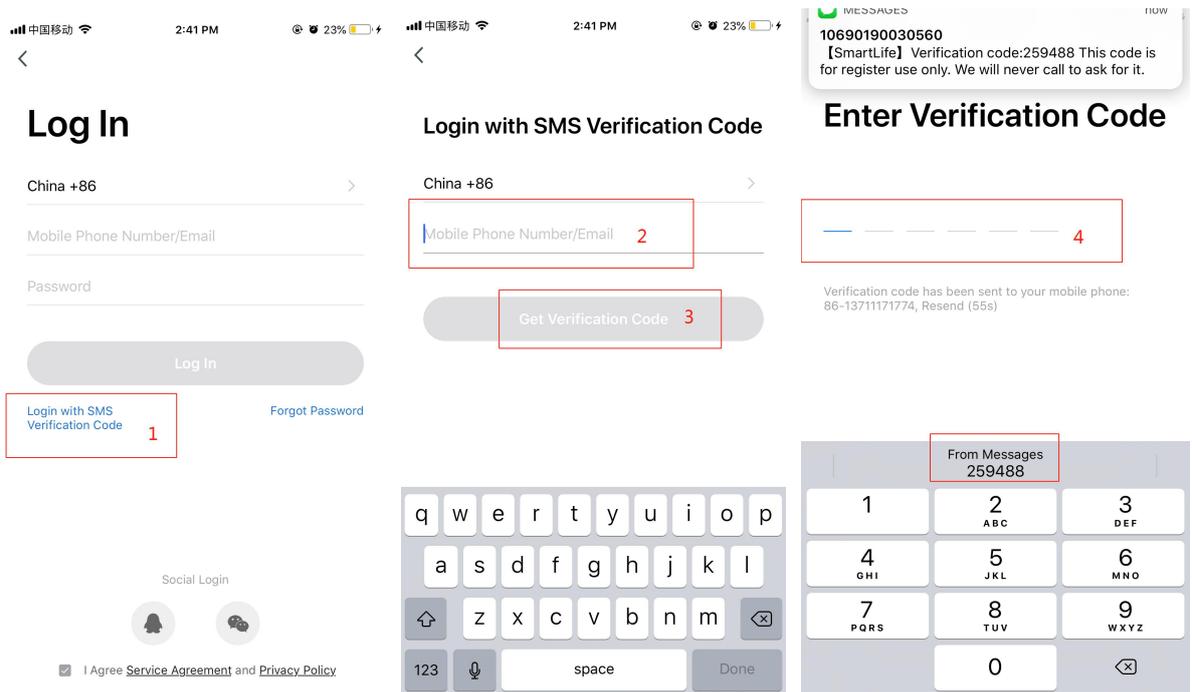
Get Verification Code   3

q w e r t y u i o p
a s d f g h j k l
⇧ z x c v b n m ⌫
123 🎤 space Done

MESSAGES   now
1069019003 0560
【SmartLife】 Verification code:259488 This code is for register use only. We will never call to ask for it.

Enter Verification Code

_____ ___ ___ ___ ___   4

Verification code has been sent to your mobile phone: 86-13711171774, Resend (55s)

From Messages
259488

1   2 ABC   3 DEF
4 GHI   5 JKL   6 MNO
7 PQRS   8 TUV   9 WXYZ
          0   ⌫

● After creating a family or login, enter the interface of App Intelligent Life.

4、WIFI module networking：

● **Step 1**

The heat pump manually enters the smart distribution grid mode: within 10S after power-on, press and hold the "switch", "✚", "timing" three buttons 5S at the same time to enter the smart distribution grid mode, the "WIFI" icon flashes, phone can start distribution grid.

Note: Withdrawal from distribution grid after 3 minutes. The "WIFI" icon will stop flashing. The WIFI module will no longer be equipped with the network. To re-distribute the network, you need to press "Switch" + "✚" + "Timed" 5S again.

● **Step 2**

Open the "Smart Life" app, log in to the main interface, click "✚" in the upper right corner or "Add Device" in the interface to enter the device type selection, select "Air Condition" in the "Household Power" device to enter the Add Device interface;
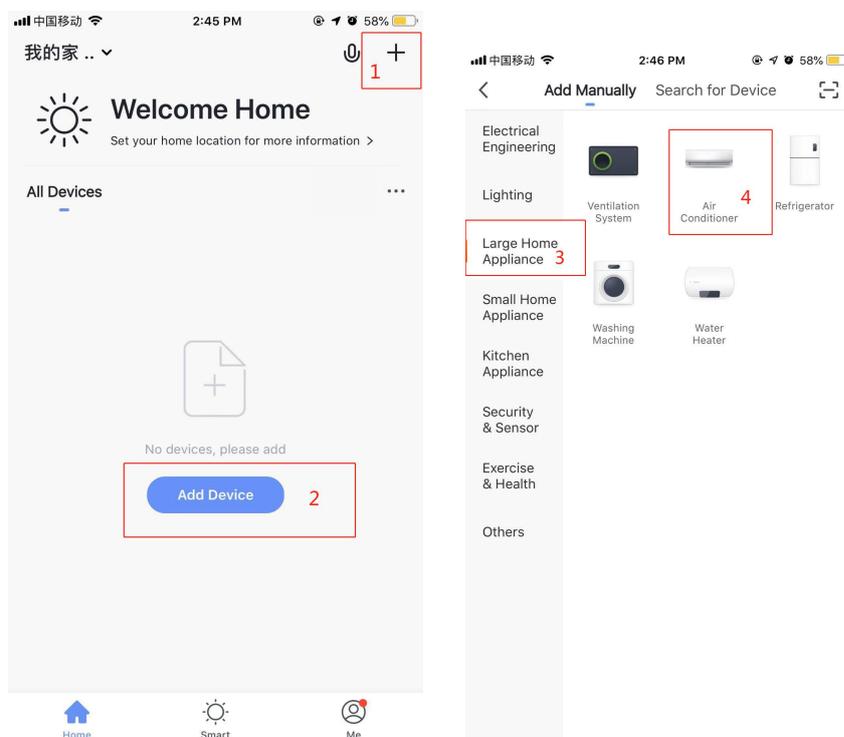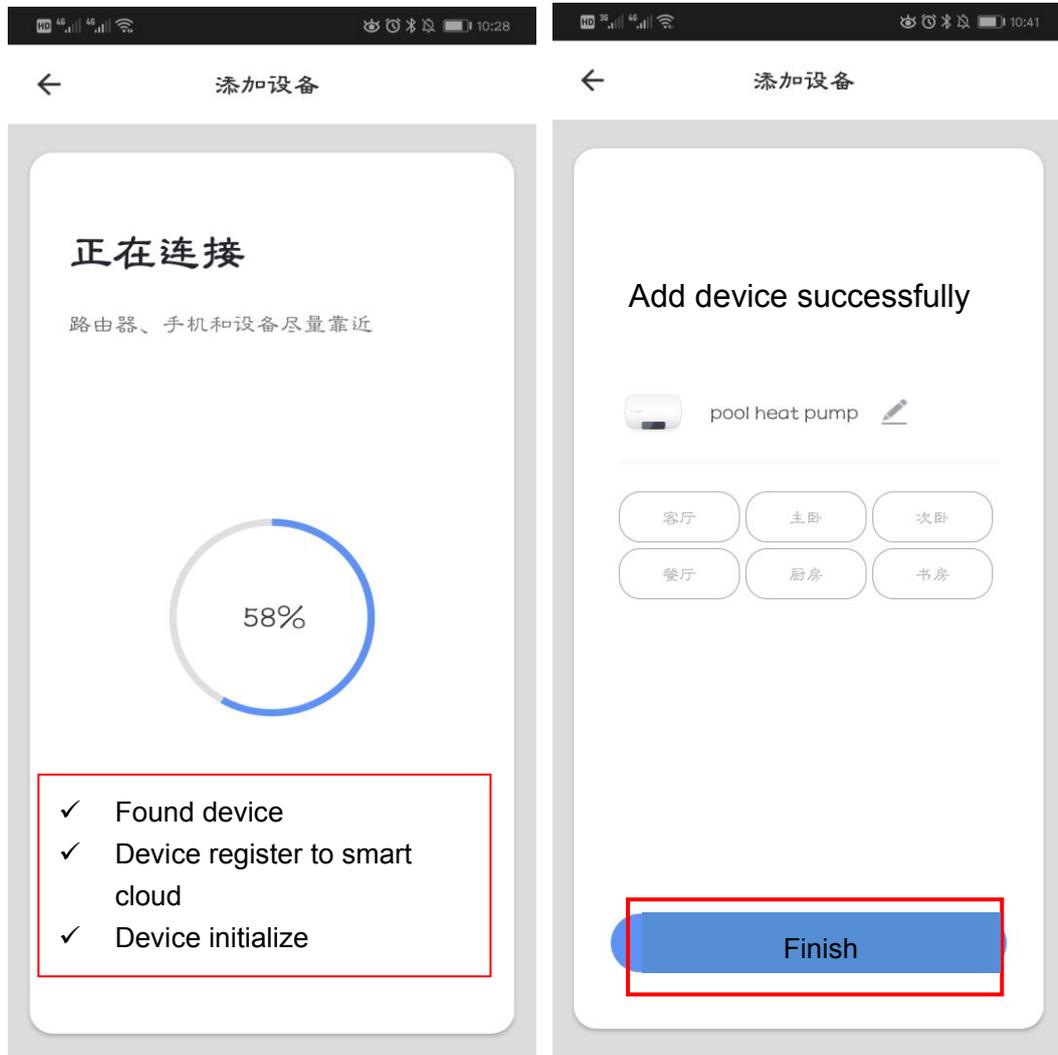
● Step 3

"Add Device" interface, confirm that the line controller has selected the smart distribution mode. After the "WIFI" icon is flashing, click "Confirm indicator is flashing";

Enter the WIFI connection interface, enter the WIFI password that the mobile phone has connected (must be consistent with the WIFI connected to the mobile phone and the WIFI must be 2.4G WIFI), click OK to enter the device connection status directly;
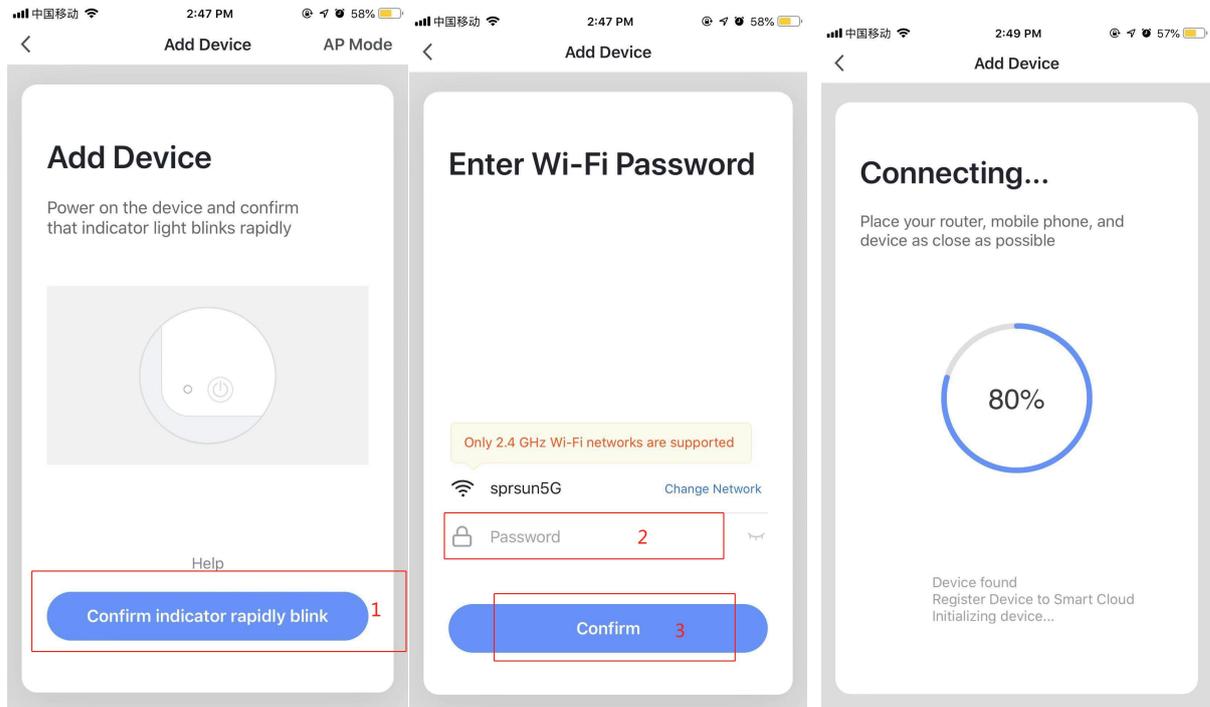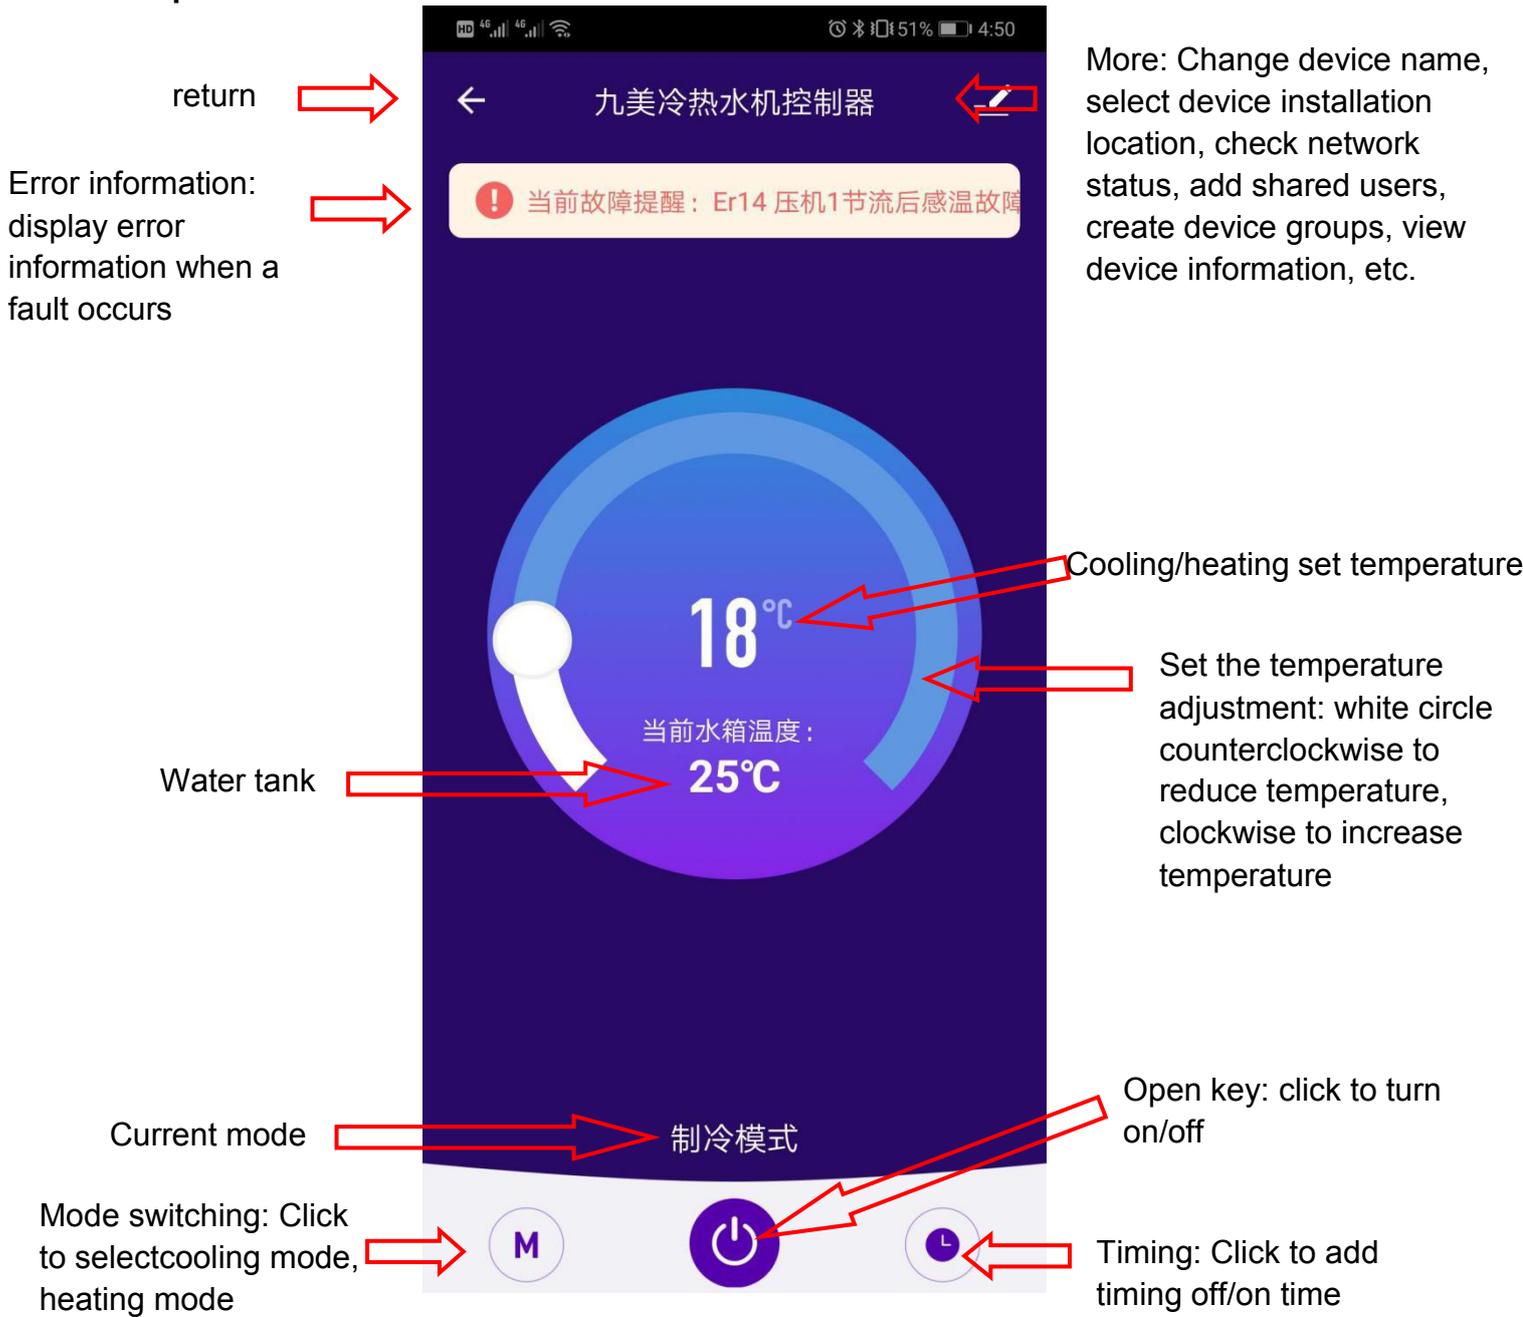
● Step 4

After automatic process of " found device", " Device register to smart cloud", "D evice initialize", the connection is done and distribution network is done after showing " Add device successfully". In this interface ✎ , you can change the name of the device an d chooce the installation location(hall, bedroom…)And click "finish" to enter to Operation Int erface of the device.

5、**APP Operation Instructions**

return →

Error information: display error information when a fault occurs →

Water tank →

Current mode →

Mode switching: Click to selectcooling mode, heating mode →

More: Change device name, select device installation location, check network status, add shared users, create device groups, view device information, etc.

Cooling/heating set temperature

Set the temperature adjustment: white circle counterclockwise to reduce temperature, clockwise to increase temperature

Open key: click to turn on/off

Timing: Click to add timing off/on time

九美冷热水机控制器

当前故障提醒：Er14 压机1节流后感温故障

18℃

当前水箱温度：
25℃

制冷模式

M

- Modify the device name
- Click "Device Details" in the following order and click "Device Name" to rename the device name.
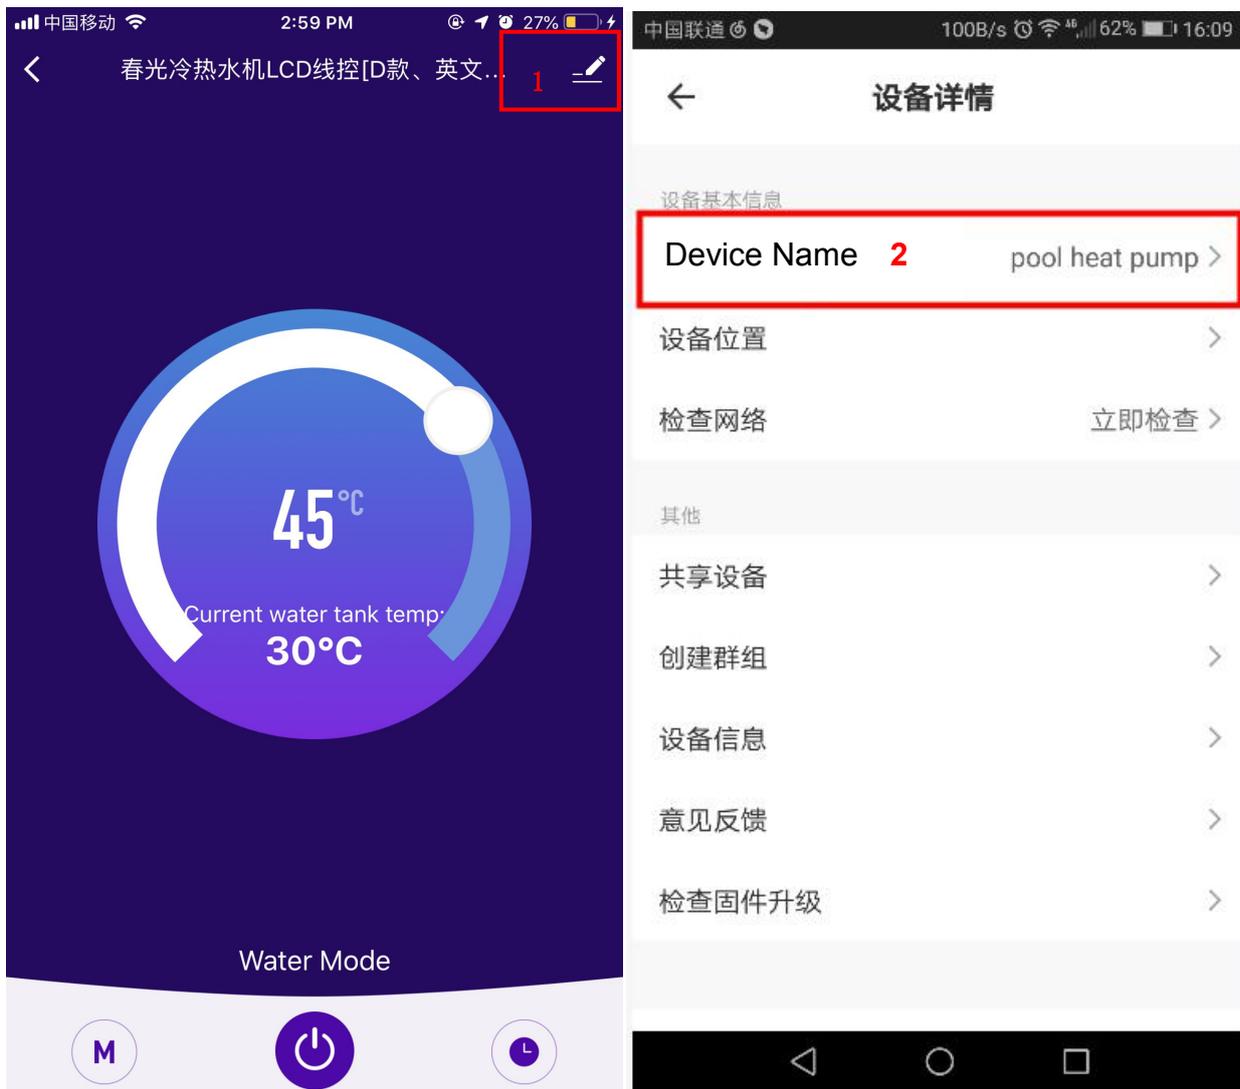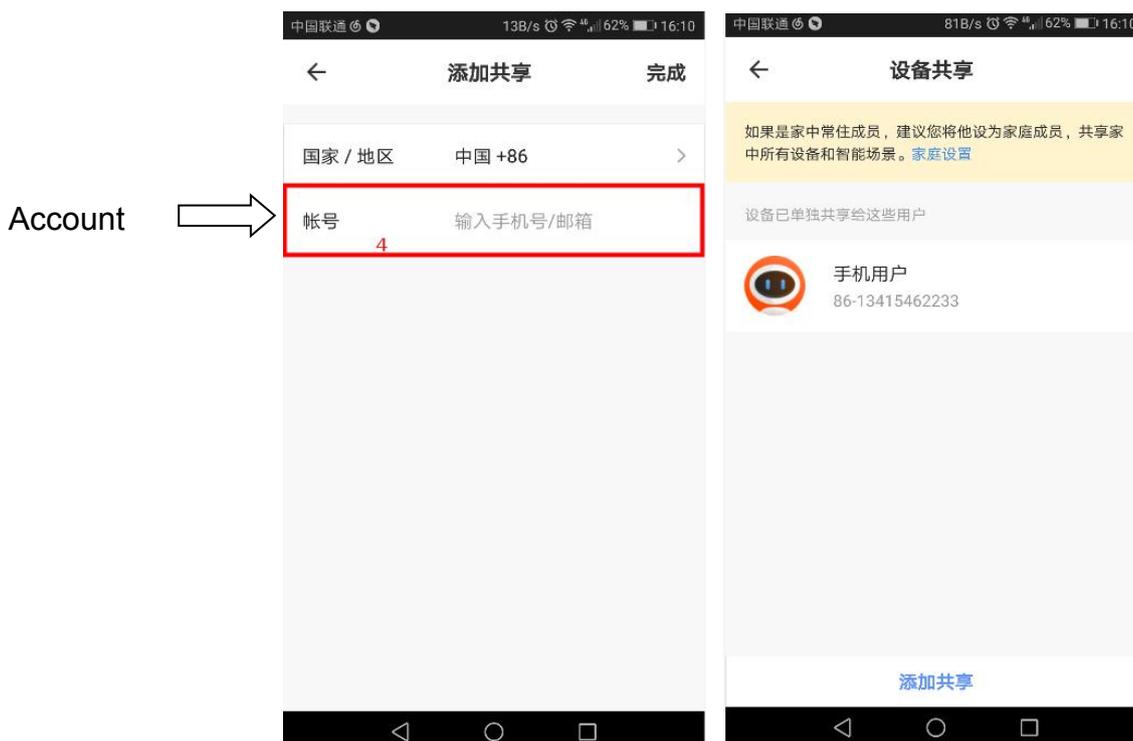
- **Device sharing**
  - Share the bound devices, and the sharers operate in the following order.
  - After the sharing is successful, the list increases to show the shared person.
  - Delete the shared person, press and hold the selected user, the pop-up interface will pop up, click "Delete"
  - The sharing interface is as follows:
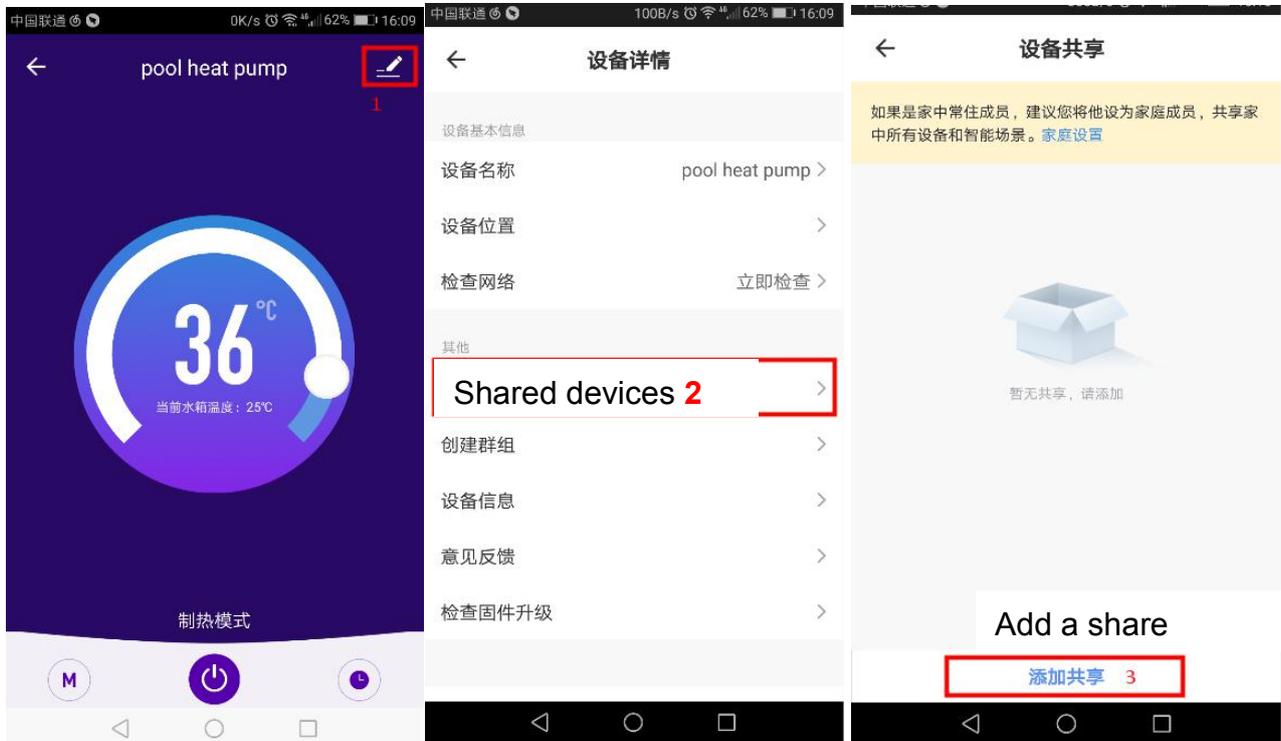
- Enter the shared account and click "Finish". The sharing success list shows the newly added account.

- The interface of the shared person as below, showing the shared deviced is received, then chick to enter can ooperate the control device.
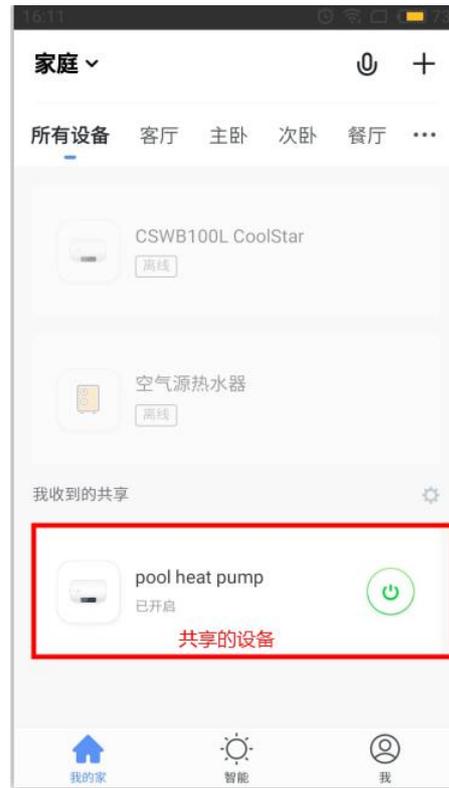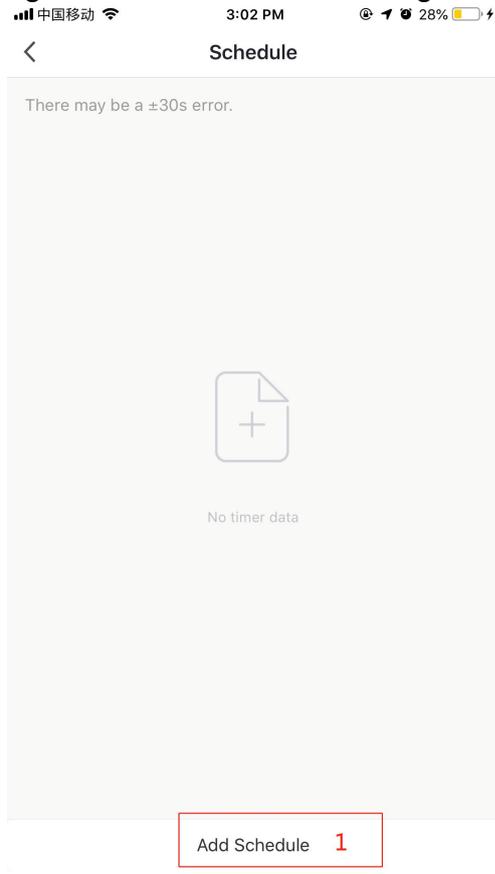
- **Mode setting**

  - Click " " mode switch on the main interface of the device operation, and the mode selection interface will pop up as shown below. Click the mode you want to select.
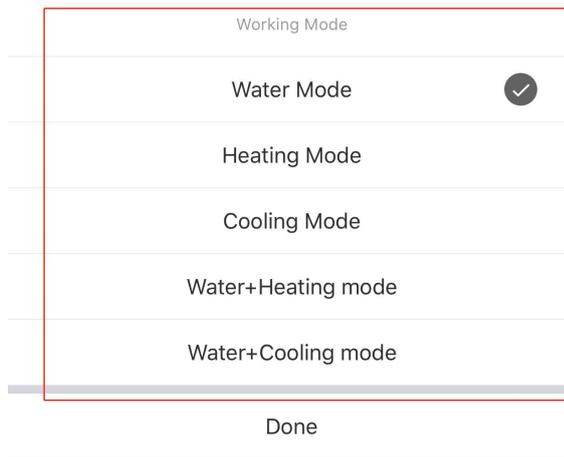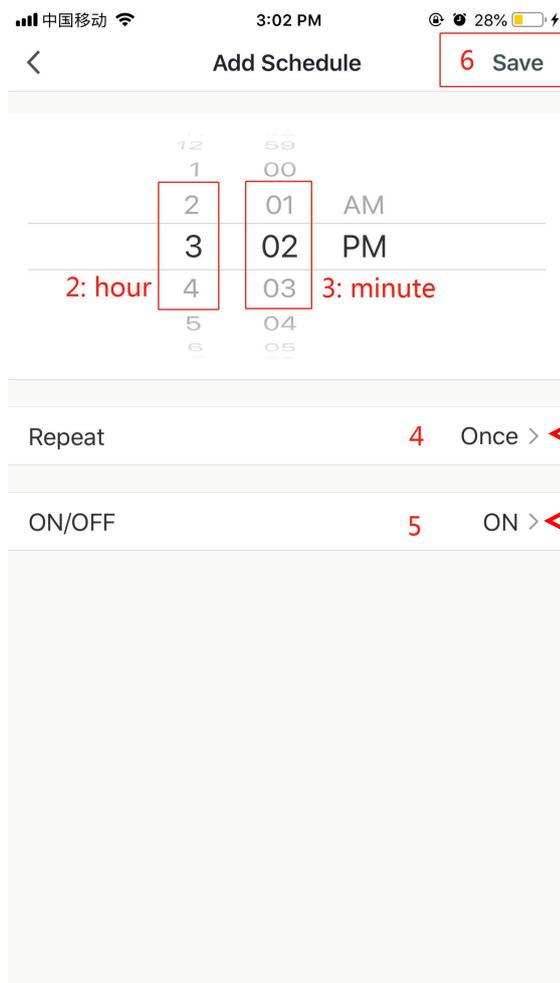
- **Timer setting**

  - Click " " on the main interface of the device operation, and enter the timing setting interface. As shown in the figure below, click Add Timing.

- Enter the timing settings, sliding up and down hours/minutes can set the timing time, and set the repetition week and turn/turn, according to the upper right corner can be saved, as shown in the following order;

- ## Remove device

  Remote control removal
  - When the device has been added,if you need to remove the device, long press "＋" plus "switch" plus "timing" 5S, the device is removed and re-entered into the smart distribution network mode.The "WIFI" icon flashes within 3 min to re-configured the network. If it exceeds 3 min, the network will be quit.
  - When the device has been added, if you need to remove the device. Press and hold "—" plus "Switch" plus "Timer" 5S. The device is removed and re-entered into the AP distribution mode.The "WIFI" icon flashes within 3 min to re-configured the network. If it exceeds 3 min, the network will be quit.

- **Remove APP**

  - Click on the top right corner of the device operation main interface "![pencil icon]" Enter the device details interface. Click "Remove Device" on the device details interface to enter the smart distribution network mode.The "WIFI" icon does not flashes , re-configured the network within 3 min. If it exceeds 3 min, the network will be quit. The specific operation is as follows.