




CONNECTO™ FITTINGS

The Connecto™ compression fittings line has been designed for the conveyance of high-pressure fluids and is particularly recommended for gardening and irrigation systems. Its fast and easy assembly marks it out.

Materials

| Parts | Material | Colour |
|--------------------|---|--------|
| Body (A) | High viscosity and mechanical resistance polypropylene | black |
| Blocking bush (D) | Polypropylene | black |
| Nut (B) | Polypropylene with dye master of high stability to UV rays and solidity to heat (8 grade according to standard DIN 54004) | green |
| Clinching ring (C) | Polyacetal resin (POM) with high mechanical resistance and hardness | white |
| O Ring gasket (E) | Special elastomeric acrylonitrile rubber (NBR) for alimentary use | black |
| Reinforcing ring | Stainless steel AISI 430 for female threads from 2" to 4" | - |

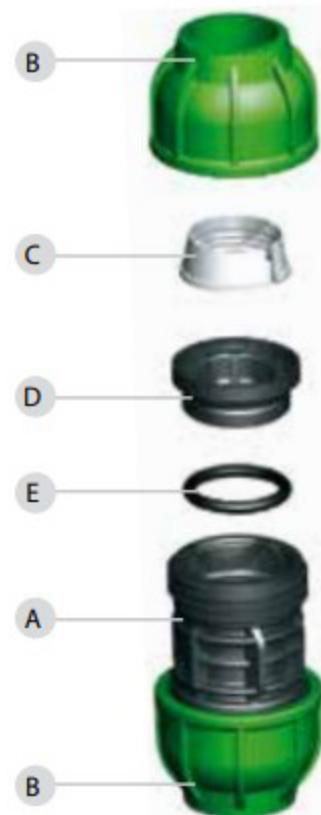

Reference Standards

- Operating pressures: UNI 9561:2006; DIN 8076:2007; ISO 14236:2000; GW 335-B3:2011; SANS 14236:2003; AS/NZS 4129:2008.
- Polyethylene (PE) pipes: UNI 7990:2004; UNI EN 12201-2:2004; DIN 8074:1999
- Fittings: DM 174 06/04/2004; BS 6920:2000; W270; KTW
- Threads: ISO 7-1:2007; UNI EN 10226-1:2006; UNI EN ISO 228-1:2003; ANSI ASME B1.20.1:1983
- Flanges: UNI EN 1092-1:2007; ISO 7005-1:2011

“Connecto™” are certified: