

* incl. 20 [-5; +30] mm pull out

3D model is available on request or www.hyva.com

Specifications		Max. pump flow		Tipping time	
Max. working pressure	250 bar	With KO ¹	151 L/min	With KO ¹	11 sec
Weight	183 kg	Without KO ¹	106 L/min	Without KO ¹	15 sec
Working volume	27 L	With KO ¹ below -20°C	106 L/min	With KO ¹ below -20°C	16 sec
Total volume	30 L	Without KO ¹ below -20°C	74 L/min	Without KO ¹ below -20°C	21 sec
Max. cyl. load (start tipping)	245 kN			Allowable lowering time	11 sec
Max. cyl. load (end of stroke) ²	205 kN				
Max. cyl. load (end of stroke) ³	239 kN				

Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted black (RAL9005) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- ¹ Hyva knock-off.
- ² Unsubstantial unloading (sticky load).
- ³ Substantial unloading.

Related documentation


Bracket options:	015BRA10 & 015BRA12
Mounting instructions:	CYL-0030
Oil specifications:	OIL-0011
Spec sheet explanation:	CYL-0041

Configuration

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	118	99	80					3490
Stroke* [mm]	1150	1170	1170					

Tipping weight

For detailed tipping calculations please refer to: <https://tipper.hyva.com>


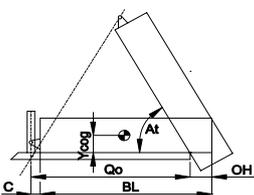


BL body length
OH rear overhang
Ycog vert. pos. centre of gravity
Qo pivot length
C bracket length
At tipping angle
stroke x 60 / Qo


BL [mm]	200	4700	600	200	4450	600	200	4200	600
OH [mm]	44	46	49	47	49	52	50	53	56
At [°]									
Ycog [mm]									
C [mm]	34	37	41	35	39	43	37	41	46
At [°]	37	41	47	39	44	51	41	48	57
At [°]	41	46	54	44	51	61	48	57	

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 178 mm

Pos.	Part no.	Description	Qty.
C01	71839040	DUST COVER FC LOW 15-244	1
C02	71706425	COVER 242-1165 PIN60 A340 FIX	1
C03	01702956K	WASHER M48 DIN 125B ZP	1
C04	01702907K	TOPNUT NYLOC M48x3 DIN 985 ZP	1
P01	70432373	PISTON MN3 S 080-1365-HC	1
P02	70209300K	SLIDER MN 080 (2 x 1/2) A22	1
P03	70216080K	OUTER STOPRING MN 080 A22	1
P04	70224080	BOTTOM PLATE PISTON MN 080	1
P05	01745035K	CIRCLIP 70 DIN 472 (74.5x2.5)	1
P06	70260210K	O-RING PISTON BOTTOM 080	1
P07	70232305	PISTON HEAD MN3 080	1
P08	70260110K	O-RING 63.09 X 3.53 MM	1

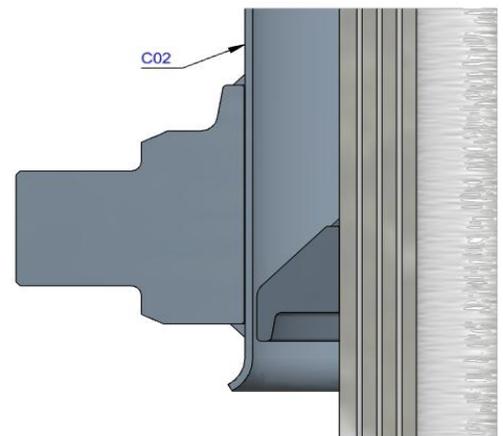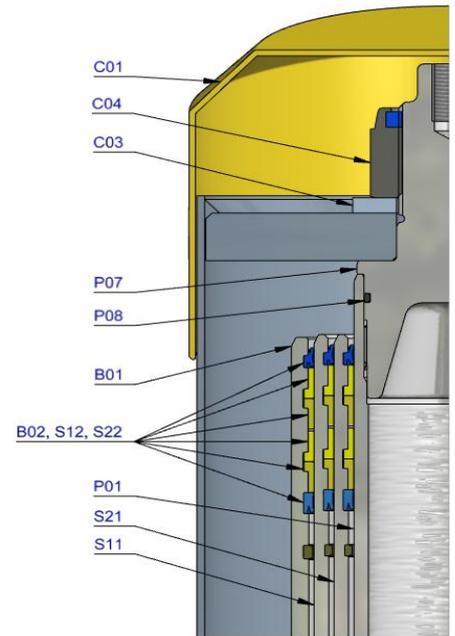

S21	70663371	STAGE MN2 099-1360-HC	1
S22	70203099K	PACKSET MN 099	1
S23	70209310K	SLIDER MN 099 (2 x 1/2) A22	1
S24	70216099K	OUTER STOPRING MN 099 A22	1
S25	70217099K	LIFTRING MN 099 A22	1
S11	70664371	STAGE MN2 118-1360-HC	1
S12	70203118K	PACKSET MN 118	1
S13	70209320K	SLIDER MN 118 (2 x 1/2) A22	1
S14	70216118K	OUTER STOPRING MN 118 A22	1
S15	70217118K	LIFTRING MN 118 A22	1
B01	70365370R1065	BASE MN2 137-1399-4/4BSAE-190-C242	1
B02	70203137K	PACKSET MN 137	1
B03	70225350	BOTTOM PLATE MN2 137	1
B04	70270137K	SEAL BOTTOM PLATE MN 137	1
B05	70220137	LOCKING PLATE MN 137	3
B06	01732055K	BOLT HEX M8X20X1.25 SET 6 PCS	1
B07	01732559K	WASHER SPRING M8 SET 6 PCS	1

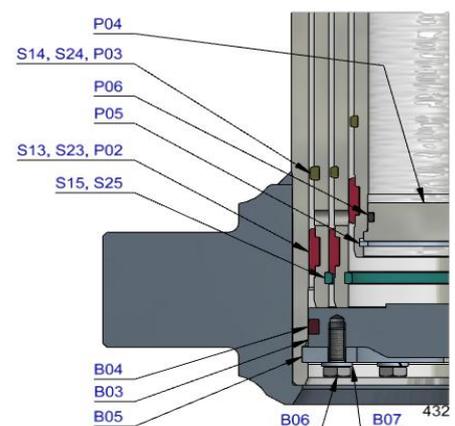

Seal kit complete

71907430K	Consists of all packsets with packset grease and O-rings
-----------	--

Notes

The inner stopring and piston bottom are pre-mounted on spare bases, stage and pistons. Therefore, when ordering new tubes, it is not required to order these parts separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.