



XT60/XT60H High Current Connectors



Electrical performance	
Model	XT60/XT60H
Pole	2P
Rated voltage	500V DC
Rated current	30A
Wiring size	12AWG/4mm ²
Transient current	60A
Contact resistance	0.55mΩ
Material	
Shell material	Nylon UL94 V-0
Contact material	Brass Gold Plated
Service life	>1000 Time
Temperature	-20℃~120℃

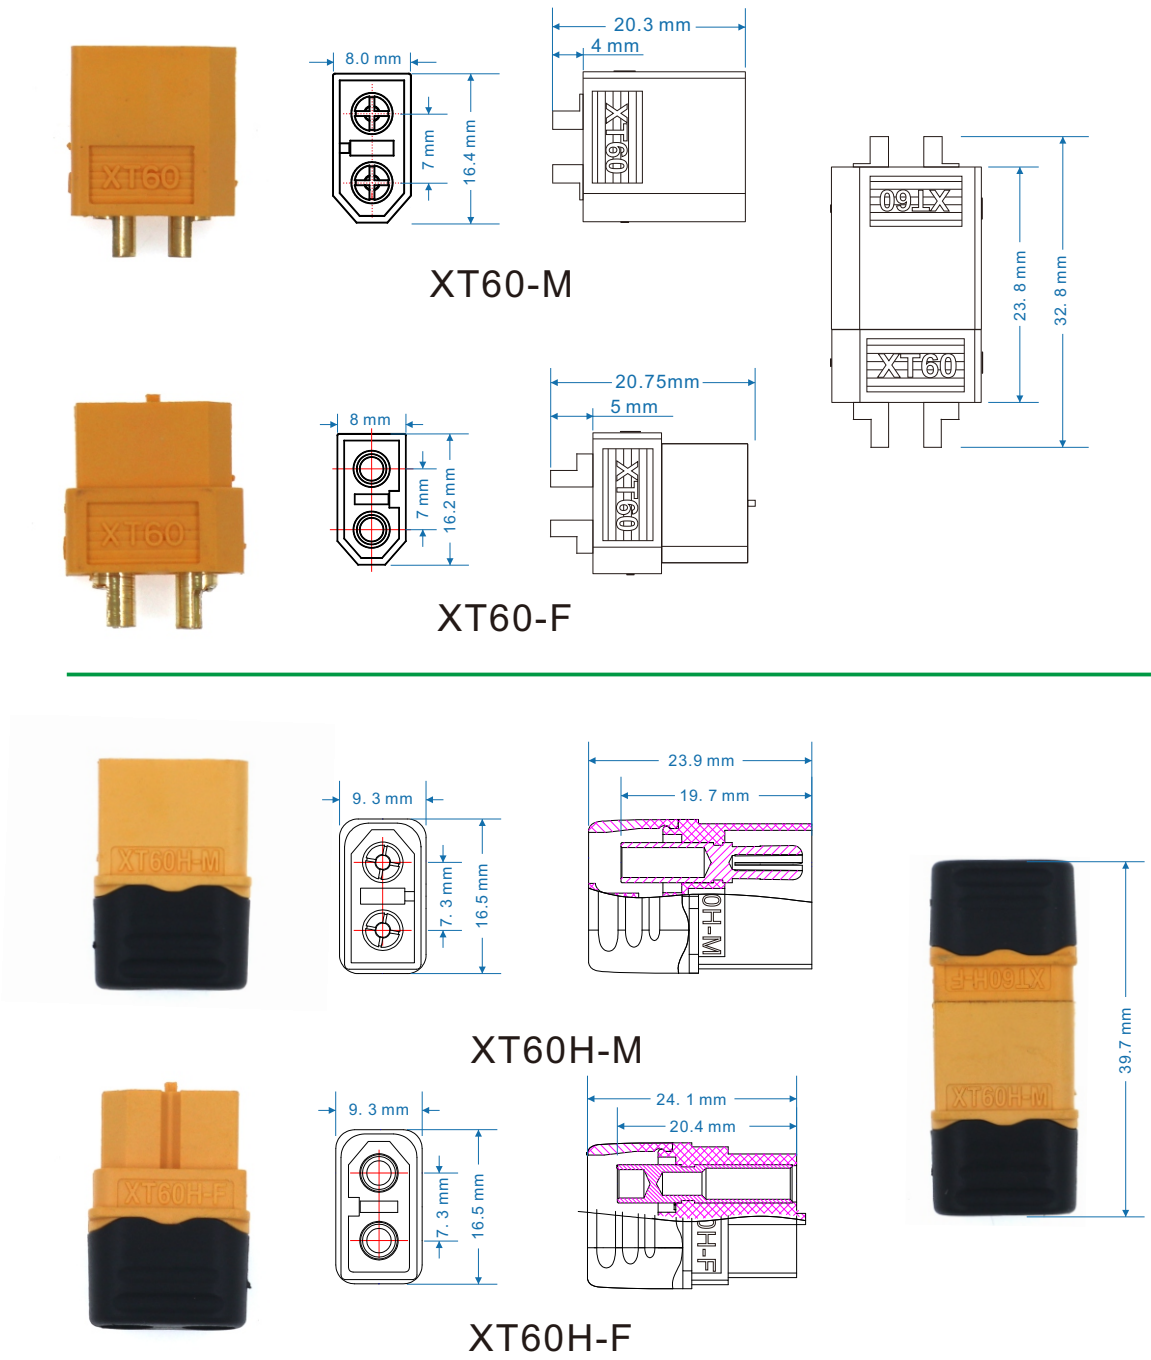

Application

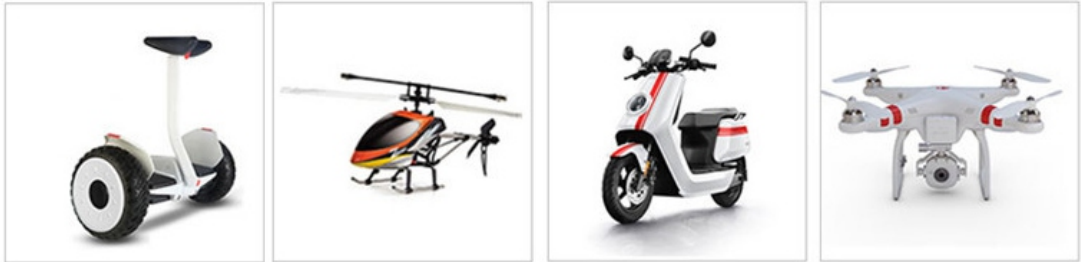

Balance car

Remote control toys

Electric bicycle

Drone