



# ALUMINIUM PUTTY

## POLYESTER PUTTY

### PRODUCT COMPONENTS

ALUMINIUM –filling polyester putty with aluminium. HARDENER for the polyester putty.

### PRODUCT DESCRIPTION

2-pack filling polyester putty with aluminum pigment. It is recommended to repair elements subject to frequent changes in temperatures.

### PROPERTIES

- Good thermal conductivity.
- Exhibits good adhesion to metal.
- Very easy to sand, the putty does not clog sanding paper during treatment.

### VOLATILE ORGANIC COMPOUNDS

VOC for the mixture = 115 [g/l]. The product fulfills the EU directive (2004/42/WE) that sets the VOC value for this product category (B/2) as 250 [g/l].

### SURFACE PREPARATION

The putty has good adhesion to various substrates, it can be applied over:

- Steel and aluminum after flatting and degreasing.
- Zinc-galvanized steel after flatting and degreasing.
- Sanded glass fibre (GFK/GRP), polyester putties, acrylic and epoxy primers.
- Existing coatings in good condition.
- We recommend sandpaper with gradations P80/P120.


---

**CAUTION! Do not apply the putty directly on the reactive primers, 1-pack acrylic and nitrocellulose products.**

---



## APPLYING PROCESS

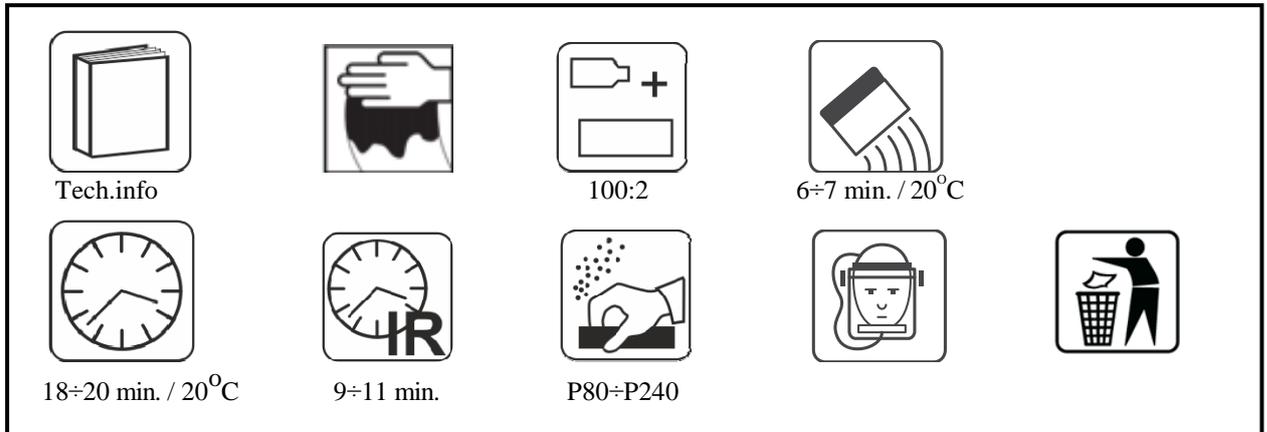

## FURTHER WORKS

The putty can be over coated with:

- 2-pack polyester putties
- 2-pack polyester spraying fillers
- 2-pack acrylic primers
- 2-pack epoxy primers

---

**CAUTION! To maintain safety, always follow the instructions given in the MSDS for the product. Close the containers immediately after application!  
Protect the hardener from overheating!**

---

## GENERAL NOTES

Excessive amounts of hardener can cause problems with bleaching of the topcoat.

- Use the efficient personal protection equipment during the 2K products application. Protect the eyes and air passages.
- The rooms should be well ventilated.
- Tools should be washed directly after application.

## STORAGE

Store the product in a sealed container, in dry and cool places, away from fire and heat sources, as well as direct sunlight.