



GALİPOĞLU®
HIDROMAS

Phone : 90.332 239 08 52 (pbx)

Fax : 90.332 239 08 51

Mail : hidromas@hidromas.com

Address : Büyükkayacık Mah. Konya O.S.B. 3 Nolu Sk No:1/A 42250

SELÇUKLU / KONYA

TÜRKİYE



GHS 135-3-3855 H TEL.SİL.

Product Code :

43135338556

Reference No :

01-001

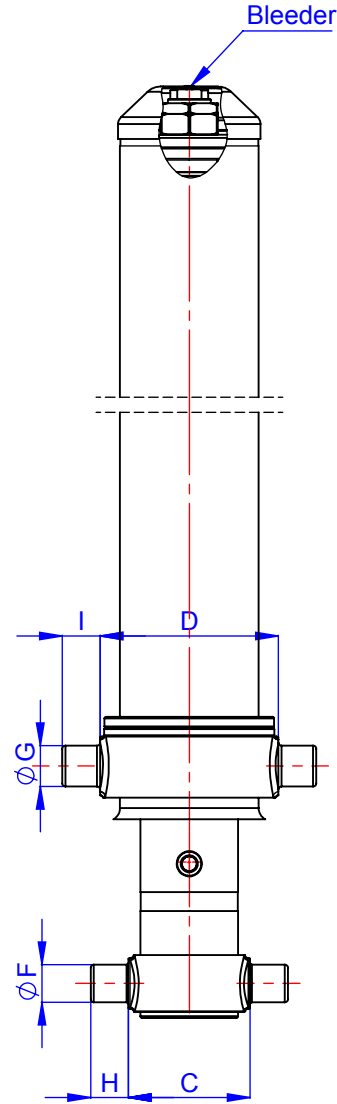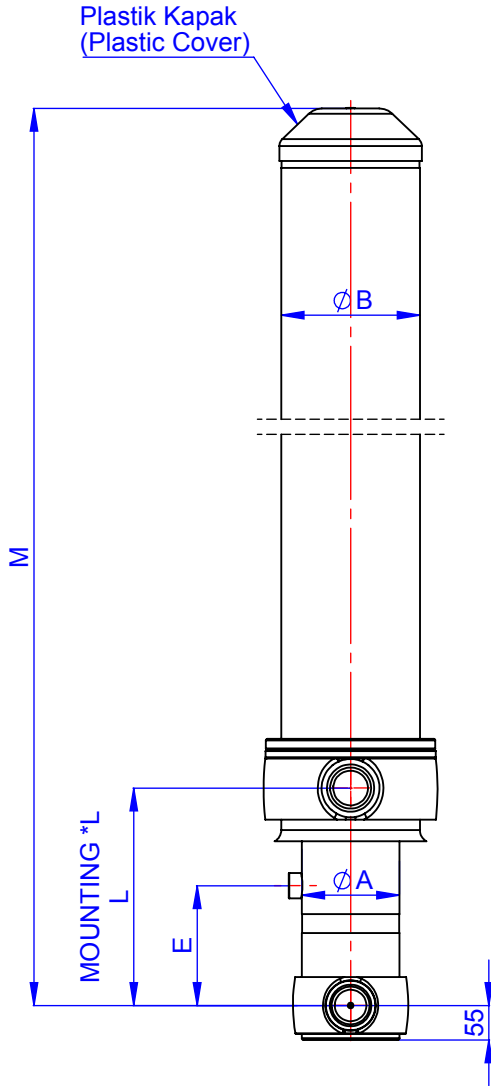

A :	155
B :	219
C :	193
D :	283
E :	190
F :	60
G :	65
H :	60
I :	60
J :	
K :	
L :	345
*L :	375
M :	1634
N :	
O :	
P :	
R :	
S :	
S1 :	
T :	
U :	
V :	
W :	
Y :	
Z :	

EFFECTIVE DIAMETER (mm)						135	116	98				
STROKE (mm)						1285	1285	1285				
THRUST AT 170 BAR (TONS)						24.1	17.8	12.7				

All sizes were given as mm

SPECIFICATIONS

- Stroke : 3855
- *Inc 30 mm pull out : Tolerance +20 ; 0
- Working pressure : 170 Bar
- Max. working pressure : 190 Bar
- Working Temperature : -23 °C / +80 °C
- Total Volume : 53.6 L
- Weight Cylinder : 214.33 kg
- Hard cromed all stages
- All cylinder materials are st 52 cold down tubes
- Standard cylinder is painted with RAL 1036

FORMULATION

- St : (Stroke)
- BL : (Body Length)
- Ro : (Rear Overhang)
- PI : (Pivot Length)
- C : (Bracket Length)

$$\alpha^\circ = \frac{St \times 60}{PI}$$

