

STEEL CAMEL M630-70 TELEHANDLER



Standard configuration

- Full wheel steering, 3 different driving mode as below selectable from inside cabin
 - Front wheel steering for normal road driving
 - 4 wheel steering, min. turning radius
 - Crab steering, handling from one side to the other without turning
- Advanced maintenance free multiple-disc brake with oil bath inside axles, no worn parts like brake disc brake shoes, etc.
- Torque converter transmission, both forward and reverse has 2 gears;
- Heated cabin with outlets for front window;
- Safety belt unfasten warning signal;
- Main power lock switch inside cabin, guarantee safety.
- Urgent boom down function when engine was suddenly off;
- Boom pipe burst protection valve, prevent boom drop when any tube bursts.
- Hydraulic quick coupling system for various attachments;


Options

Multifunction loading display

- Indicating real time loading capacity;
- Generate sound alarm when overloading
- Prohibit dangerous actions to the boom when overloading, only safe operation are allowed.

Performance	
Lifting capacity	3000kg
Max. height to pin	7250mm
Weight	6300kg
Engine	
Brand	Chinese Yunnei/Yanmar
Rated power	75~100hp, 2400rpm
Type	Direct injection, water cooled, 4 cly.
Dimension	
Max. length without fork	4250mm
Max. width	2200mm
Max. height to top of cabin	2490mm
Forks	
Length x Width x Thickness	1120X1270X45
Carriage rotation	143°
Performance time	
Boom raise	9.0s
Boom lower	7.0s
Boom extend	7.5s
Boom retract	6.2s
Crowed	4.1s
Dump	2.5s
Tyres	16/70-20
Braking	Multiple-disc brake with oil bath on front and rear axles
Transmission	Torque converter
Max. Speed	22 km/h
Number of gears (forward/reverse)	2 / 2
Gearshift	electrohydraulic control
Min. Turning radius (outer wheels)	
front wheel steering	6100mm
all wheel steering	4150mm
Driving	4 wheel driving
Turning angel	35 degree
Track	1785mm
Wheelbase	2500mm
Hydraulics	
System pressure	20Mpa
Hydraulic output	96L/min
Capacity	
Fuel tank	115L
Oil tank	92L

More information

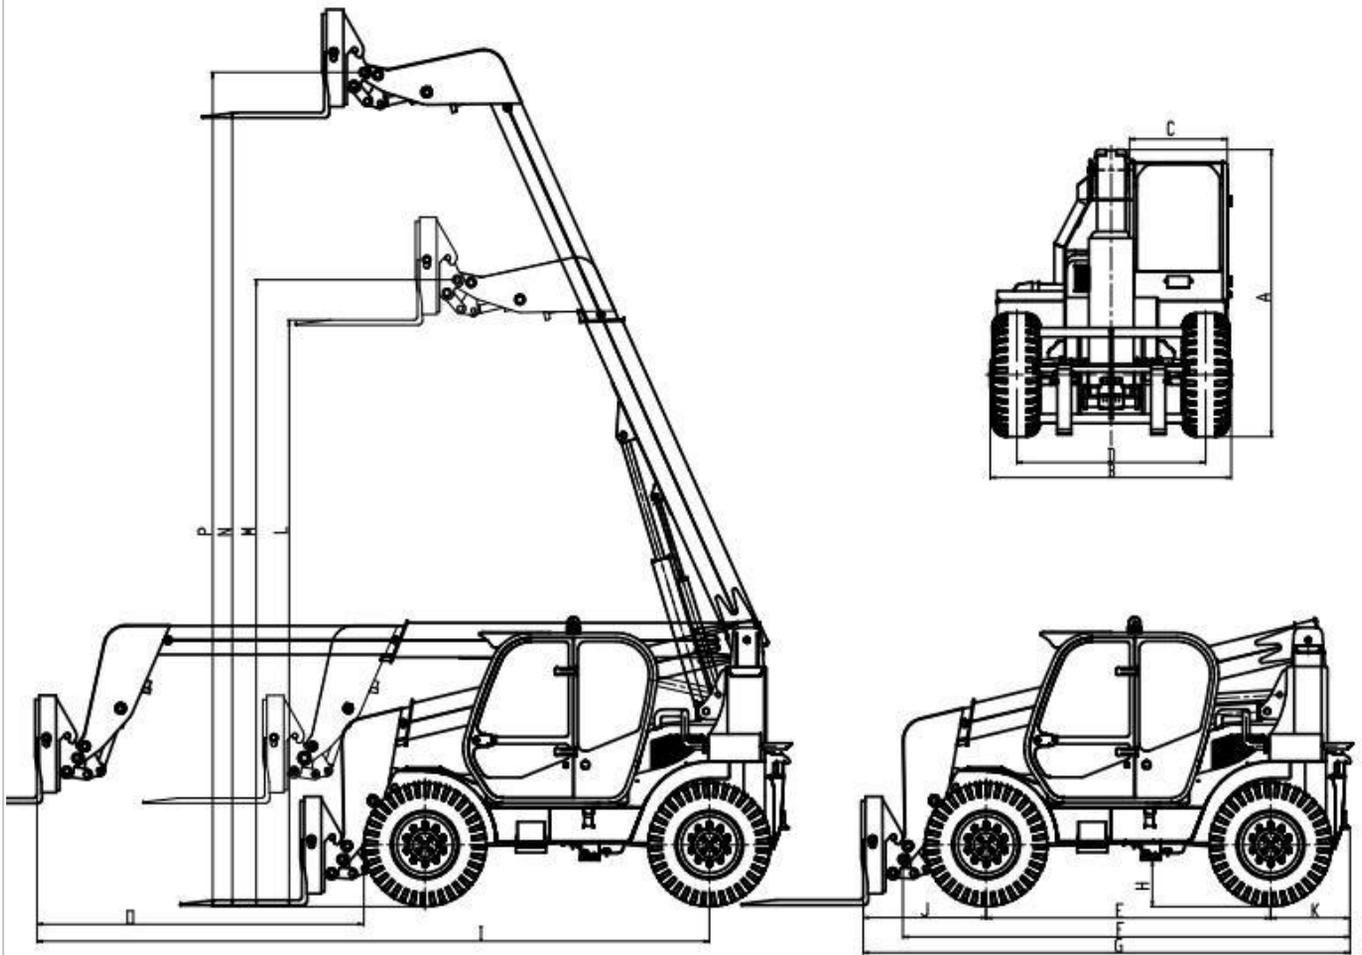

A: 2490mm

B: 2120mm

C: 860mm

D: 1663mm

E: 2500mm

F: 3930mm

G: 4278mm

H: 400mm

I: 5910mm

J: 1080mm

K: 700mm


L: 5100mm

M: 5450mm

N: 6910mm

O: 2870mm

P: 7260mm

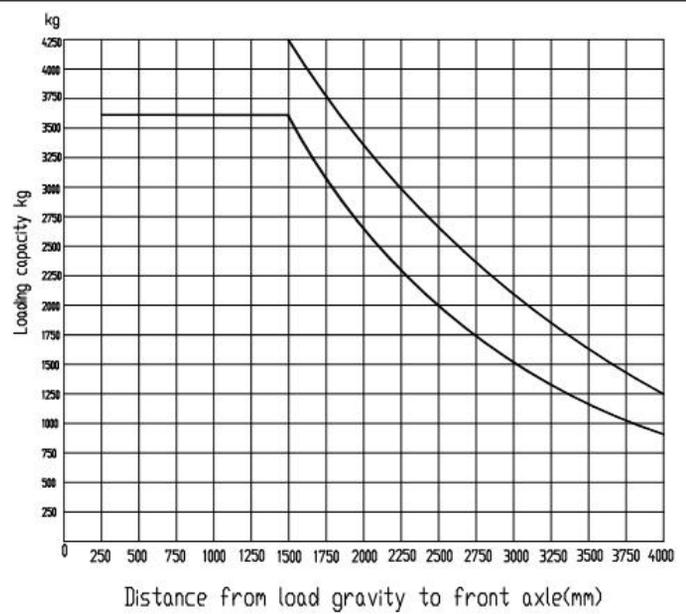

Load gravity to front axle(mm)	250	500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000
Rated loading capacity (kg)	3600	3600	3600	3600	3600	3600	3000	2700	2300	2000	1700	1600	1400	1200	1000	900

Prices FOB Qingdao (Date:Jan. 5th, 2021)

With chinese 100hp Yunnei engine, forklift	USD31,000, MOQ 2 sets
With Yanmar Euro III 87hp engine, forklift	USD34,125, MOQ 2 sets

Options

16/70-24 tyre	+USD400
Multifunction loading display	+USD1,200
Air conditioner	+USD860
LED lights	+USD100
Air suspension seat	+USD215

Business terms

- Price valid: Till Jan. 30th, 2021
- Loading condition: 2 sets/40ft high container
- Payment: 40% T/T in advance, the rest T/T before shipment.
- Delivery time:45 days after deposit depending on engine chosen

Attachments available

