

HYVA CYLINDER

714 34 281



type: UME 129-5-0980-K158-45-1/2"-HC

tipping weight: 7-15 ton

page # 1 / 1

Stage diameters 129 110 91 72 53	front view cylinder		<table border="1"> <tr><td>A</td><td>175</td></tr> <tr><td>ØC</td><td>150</td></tr> <tr><td>G¹</td><td>401</td></tr> <tr><td>I</td><td>216</td></tr> <tr><td>K¹</td><td>158</td></tr> <tr><td>H¹</td><td>52</td></tr> <tr><td>N</td><td>27</td></tr> <tr><td>ØP</td><td>50</td></tr> <tr><td>ØY</td><td>30.5</td></tr> <tr><td>S</td><td>229</td></tr> <tr><td>ØW</td><td>45</td></tr> <tr><td>X</td><td>45</td></tr> </table>	A	175	ØC	150	G¹	401	I	216	K¹	158	H¹	52	N	27	ØP	50	ØY	30.5	S	229	ØW	45	X	45
A	175																										
ØC	150																										
G¹	401																										
I	216																										
K¹	158																										
H¹	52																										
N	27																										
ØP	50																										
ØY	30.5																										
S	229																										
ØW	45																										
X	45																										

¹including 20 mm pull-out [tol. -5; +30 mm]

²cylinder is delivered including oil inlet swivel adapter

specifications

total stroke ¹	980 mm
dry weight cylinder only	45 kg
total volume	7.7 L
working volume	6.9 L
maximum pressure	220 bar
maximum pump flow	33 l/min
maximum allowable thrust first stage ³	13.0 ton
oil inlet	1/2" BSP

technical notes

This cylinder is a lifting device only and may not be used as a structural member or be subjected to side load. Sideload and/or poor alignment might result in cylinder leakage.


Hyva therefore strongly recommends the use of a cradle, even in instances where the cylinder only tips to the rear or to the side. The cylinder is painted black RAL9005.

For suitable hydraulic oils, please refer to data sheet OIL-0011. For details of available brackets and cradles, please refer data sheet 015BRA06.

Detailed calculations can be made using the HYVA Tipper Program, freely available from tipper.hyva.com.

³The cylinder thrust on the first stage (from the HYVA Tipper Program) must not exceed the maximum allowable (see specifications above).

tipping view

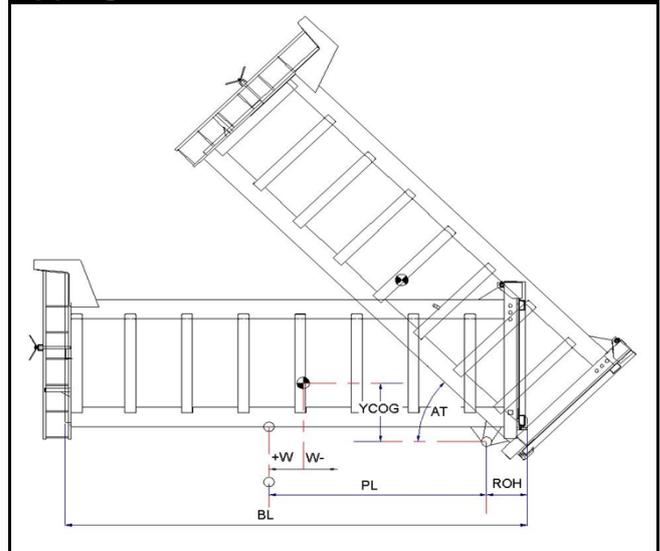

tipping weight

AT	46	deg	52				
PL	1280	mm	1130				
YCOG	500	mm	500				
ROH	500	mm	500				
BL	3960	3560	3240	mm	3620	3260	2960
CYL w.r.t. COG (W)	-200	0	160	mm	-180	0	150
Tipping weight for full stroke of 46°				Tipping weight for full stroke of 52°			
Tipping weight	7	8	10	ton	7	9	12
Tipping weight for second last stage, up to 37°				Tipping weight for 2nd last stage, up to 42°			
Tipping weight	10	13	15	ton	11	13	15


HYVA CYLINDER

714 34 281

type

UME 129-5-0980-K158-45-1/2"-HC

page # 2 / 2

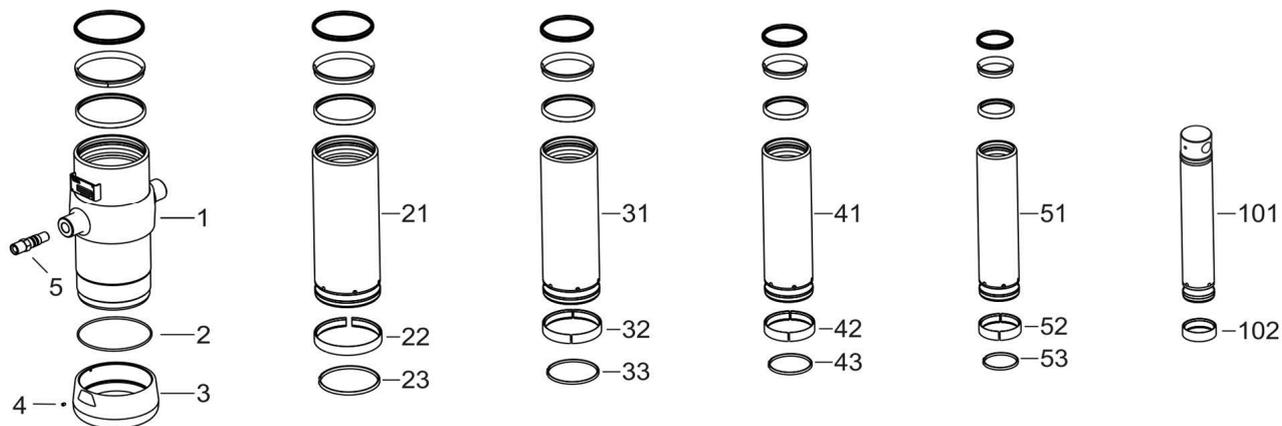

Spare part list

Pos	Part no.	Description	Qty.
1	73505100	BASE 149-0298-N0106	1
2	01226680	O-RING 145 X 4 70 SHORE	1
3	73101030	THREADED BOTTOM UM 149	1
4	01792571	LOCKING SCREW M6X12 INT. HEX. DIN 916	1
5	73103000	OIL INLET ADAPTOR UM 1/2"OT+O-RING	1
21	73604101	STAGE 129-0298-HC	1
22	71807129 K	SLIDER FL 129/GF 129 (2 X 1/2)	1
23	71812129 K	LIFTRING FL 129/HP 129	1
31	73603101	STAGE 110-0298-HC	1
32	71807110 K	SLIDER FL 110/GF 110 (2 X 1/2)	1
33	71812110 K	LIFTRING FL 110	1
41	73602101	STAGE 091-0298-HC	1
42	71807091 K	SLIDER FL 091 (2 X 1/2)	1
43	71812091 K	LIFTRING FL 091	1
51	73601101	STAGE 072-0298-HC	1
52	71807072 K	SLIDER FL 072 (2 X 1/2)	1
53	71810072 K	INNER STOPRING/LIFTRING FL 072	1

Spare part list

Pos	Part no.	Description	Qty.
101	73430101	PISTON E 053-0330-HC	1
102	71807053 K	SLIDER FL 053 (2 X 1/2)	1

Seal kit complete

Part no.	Description
719 04 450K	Complete packset: Consists of all packsets with packset grease and o-ring.