

GRABO

Fortis Silver Knight

HIGH PERFORMANCE, NON-DIRECTIONAL HOMOGENEOUS FLOOR COVERING WITH SILVER KNIGHT SURFACE

PERFORMANCE, FEATURES & BENEFITS

Good abrasion resistance | Exceptional dimensional stability | Low residual indentation | Eliminates harmful bacteria and viruses without the use of chemicals | Antistatic

SPECIFICATIONS

DESCRIPTION


Construction	homogeneous	
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m²

CLASSIFICATION

European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE


Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
	EN ISO 23999	average 0.1 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment	Silver Knight iGUARD	
Bacteriostatic activity	ISO 22196	>99%
Seaming method	hot or cold welding	
Warranty	10 year	

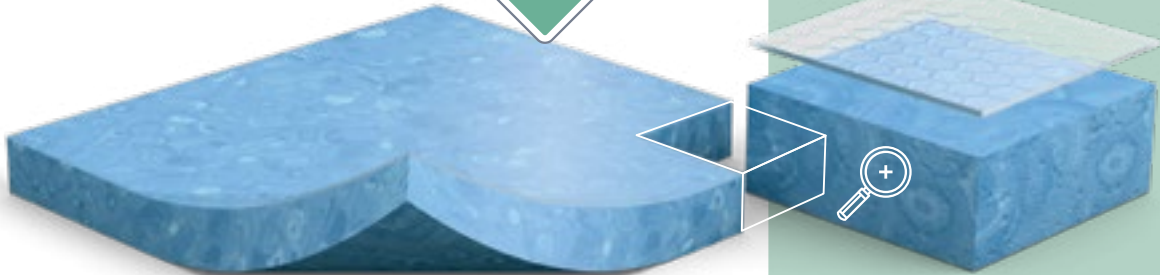

FORTIS SILVER KNIGHT


RECOMMENDED USAGE

Healthcare | Education | Offices | Other public areas

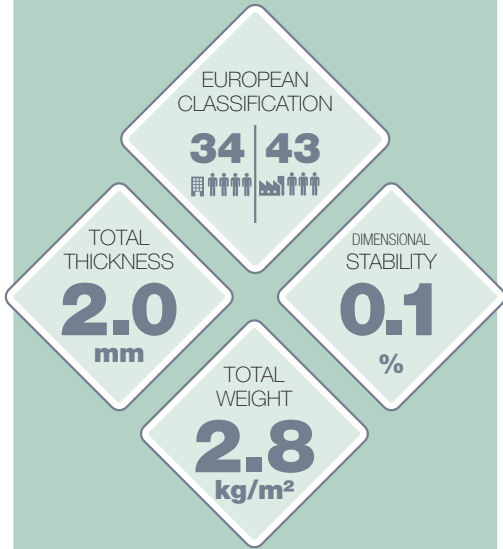


CONSTRUCTION

- Silver Knight iGuard Surface
- Non-directional homogeneous layer

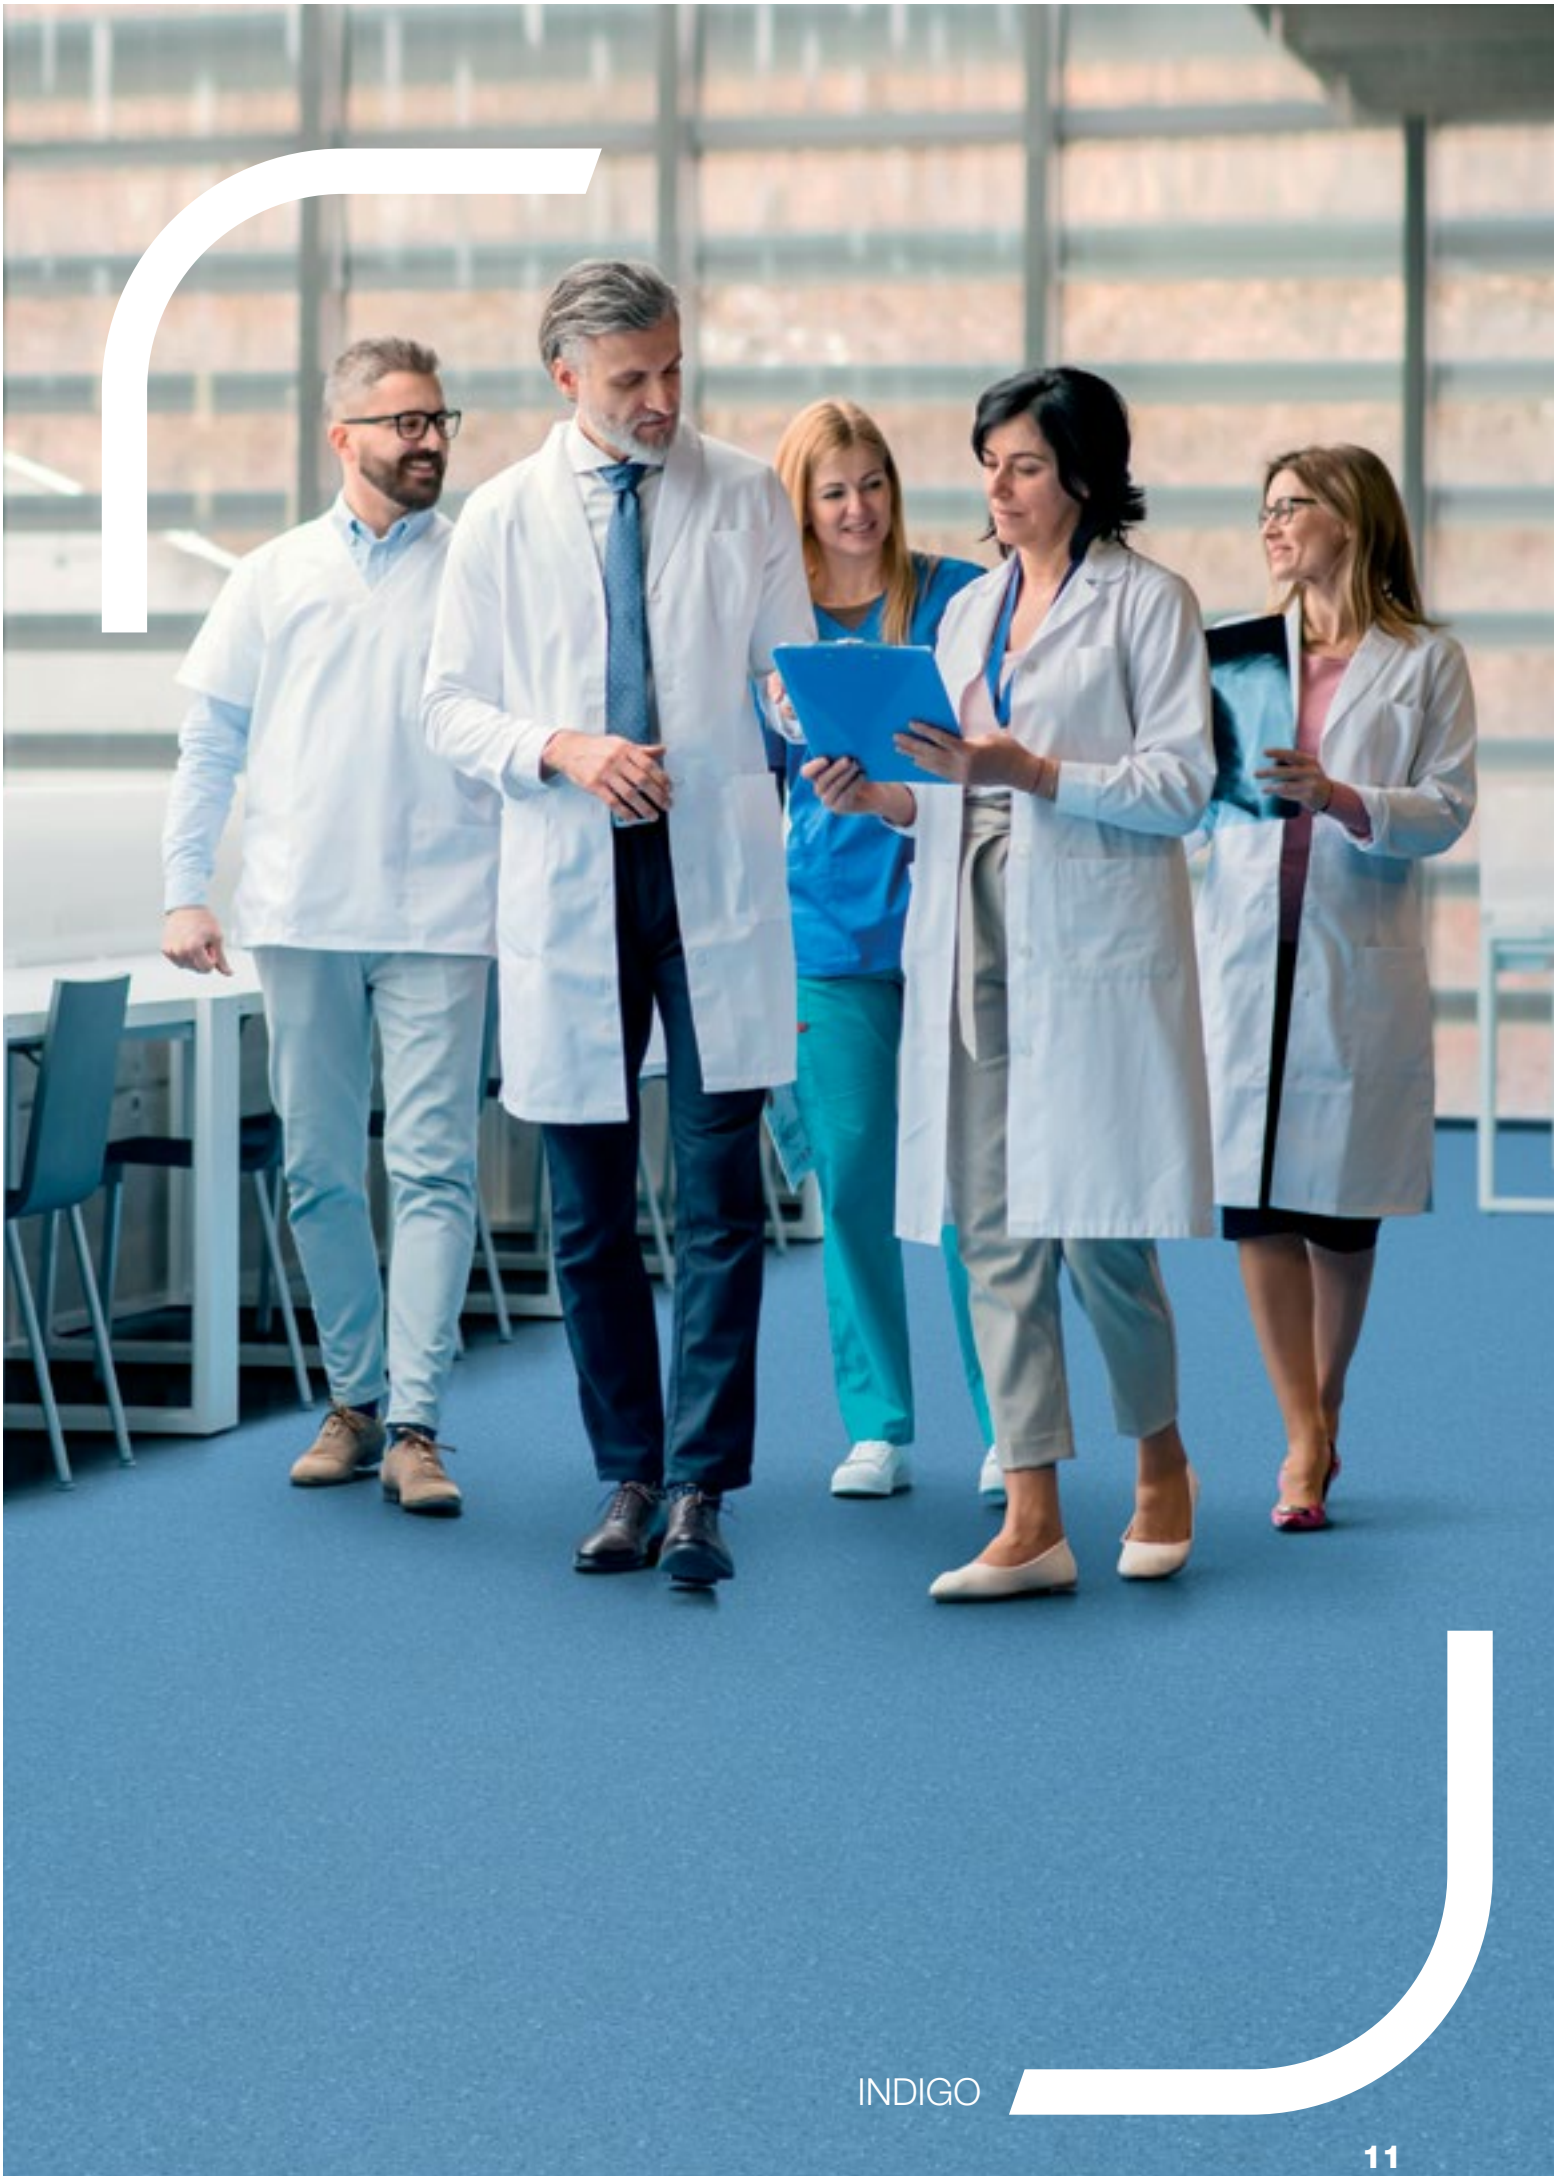

INDIGO

Fortis Silver Knight

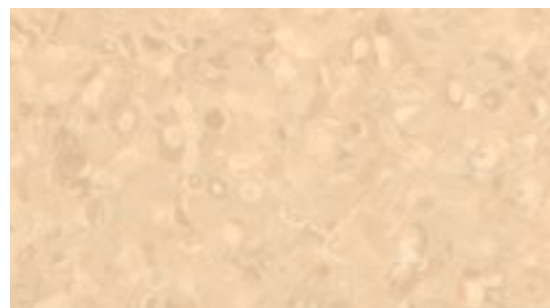


SAND



TOBACCO




CARAMEL

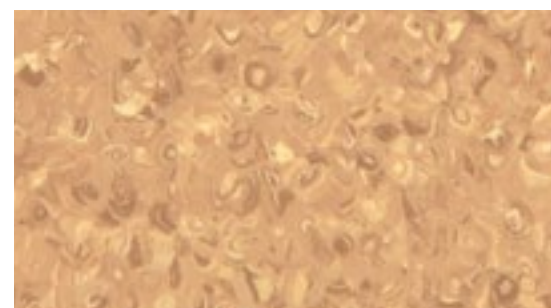

KORK




SILVER

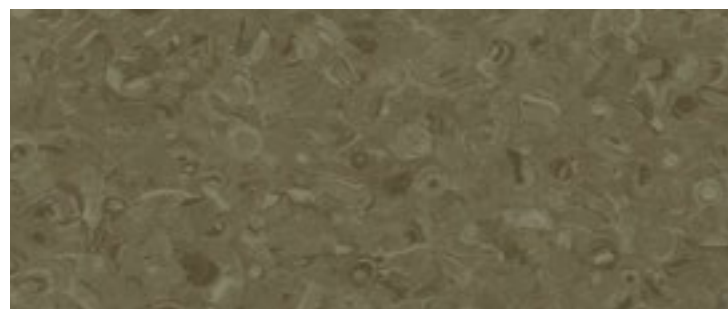


MOCCA




CANARI

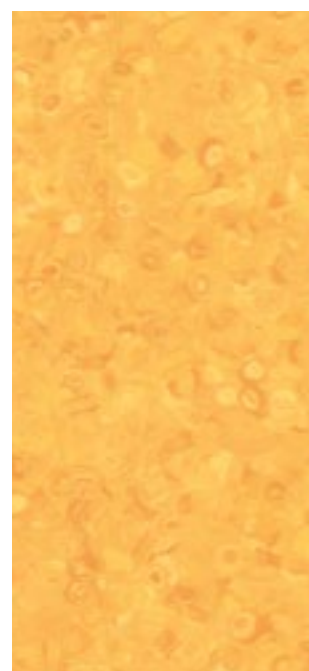


GOLD

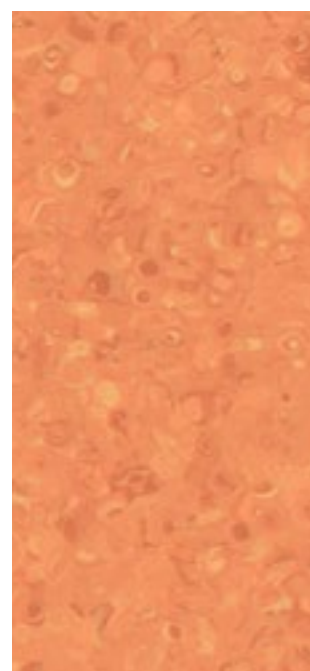

ORANGE

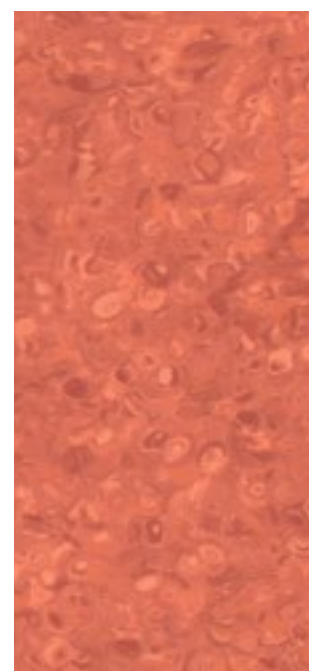


CORAL

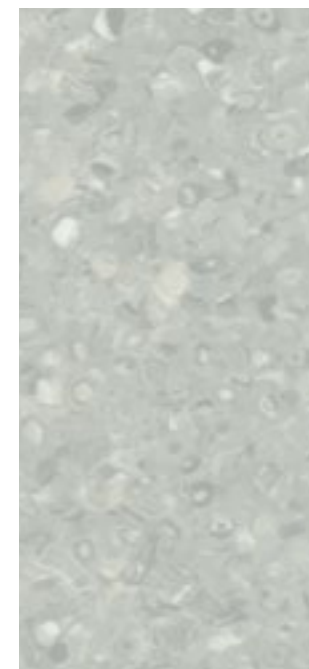


BONE




FOG

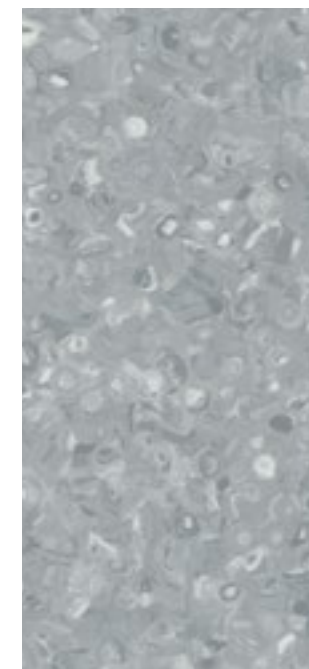


STEEL

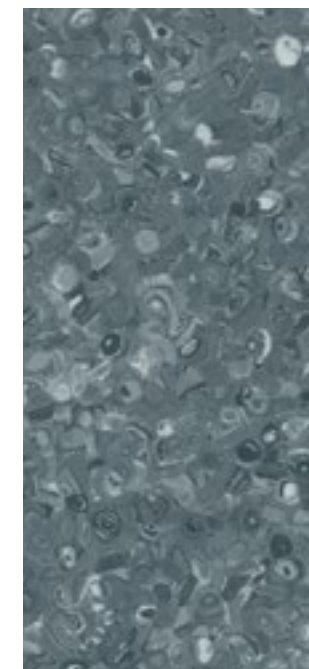


ANTHRACITE

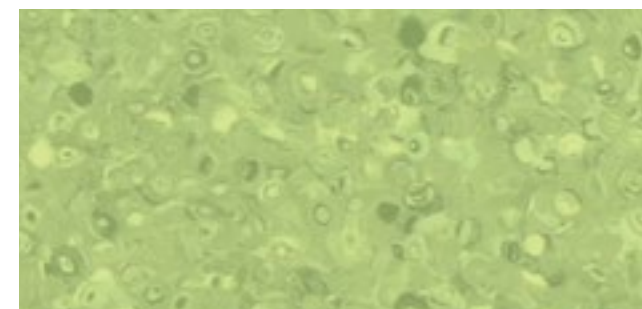


KIWI

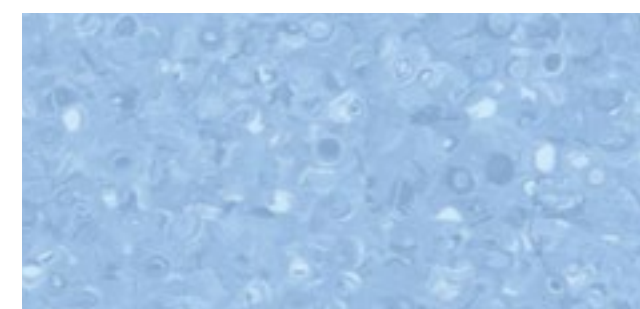


AQUA

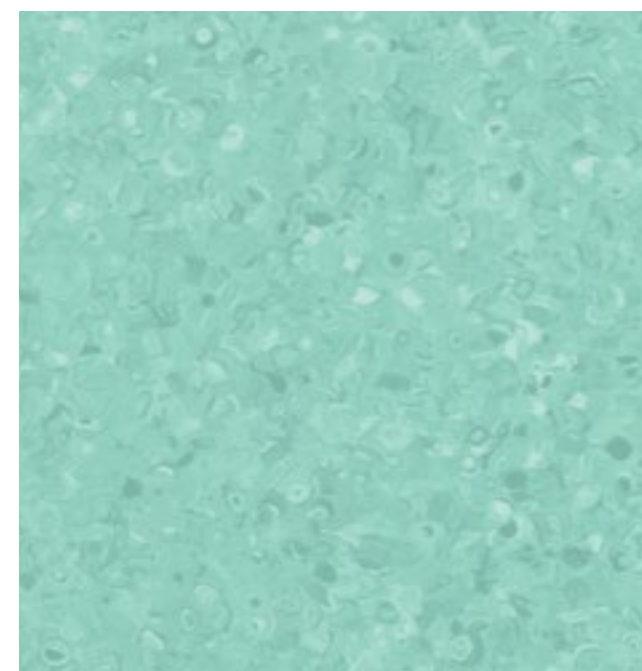

CACTUS

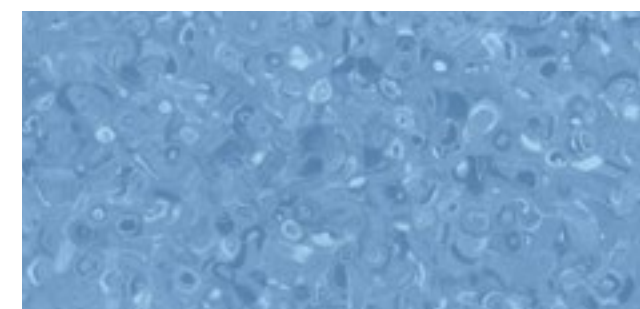

COBALT

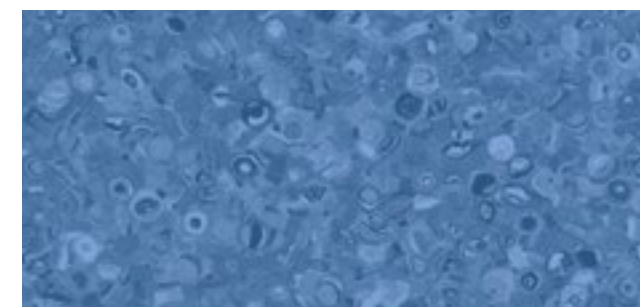

INDIGO

Fortis Wild Silver Knight

HIGH PERFORMANCE, NON-DIRECTIONAL HOMOGENEOUS FLOOR COVERING WITH SILVER KNIGHT SURFACE

HOMOGENEOUS

PERFORMANCE, FEATURES & BENEFITS

Good abrasion resistance | Exceptional dimensional stability | Exciting vivid colors | Eliminates harmful bacteria and viruses without the use of chemicals

SPECIFICATIONS

DESCRIPTION

Construction	homogeneous	
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m²

CLASSIFICATION


European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
	EN ISO 23999	average 0.1 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment	Silver Knight iGUARD	
Bacteriostatic activity	ISO 22196	>99%
Seaming method	hot or cold welding	
Warranty	10 year	

RECOMMENDED USAGE

Healthcare | Education | Offices | Other public areas

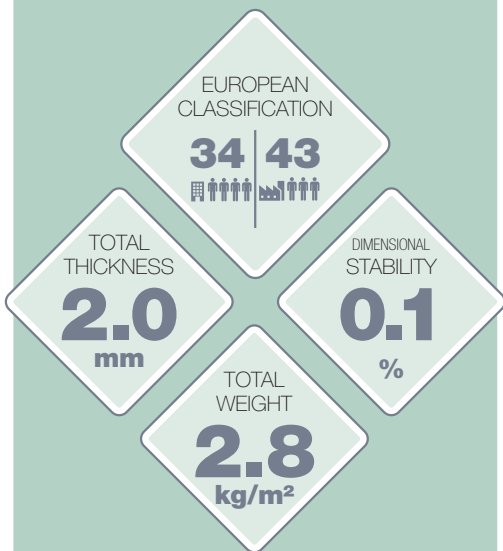

CONSTRUCTION

- Silver Knight iGuard Surface
- Non-directional homogeneous layer




FORTIS WILD SILVER KNIGHT




LION




LIZARD

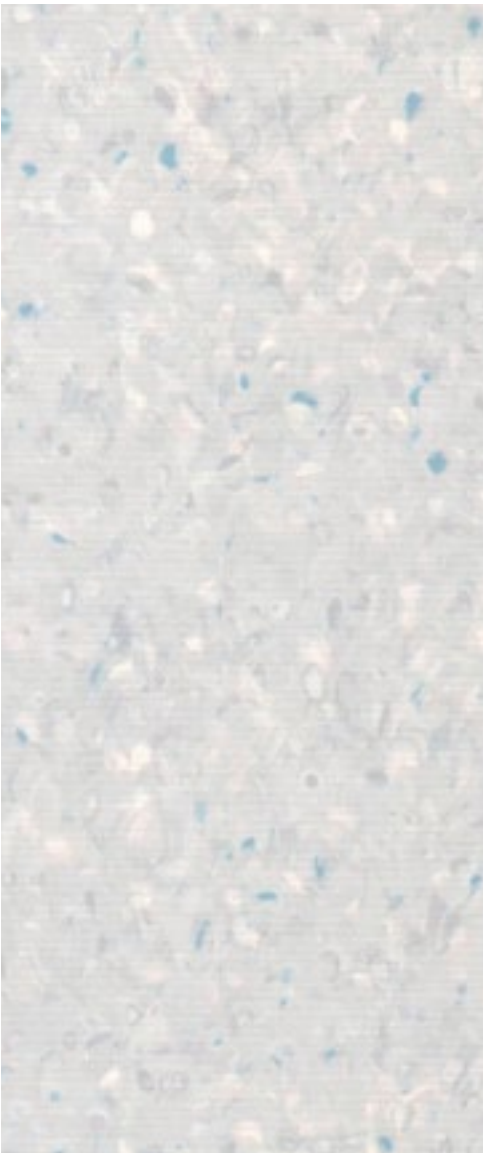


DOVE

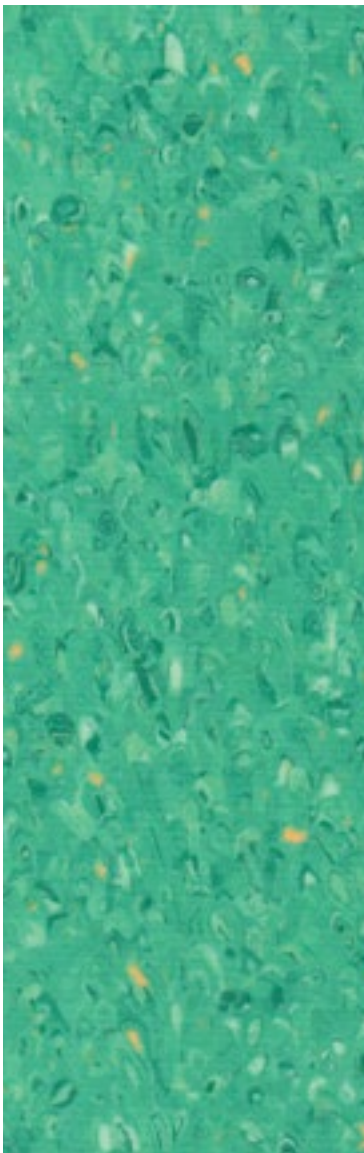

IGUANA

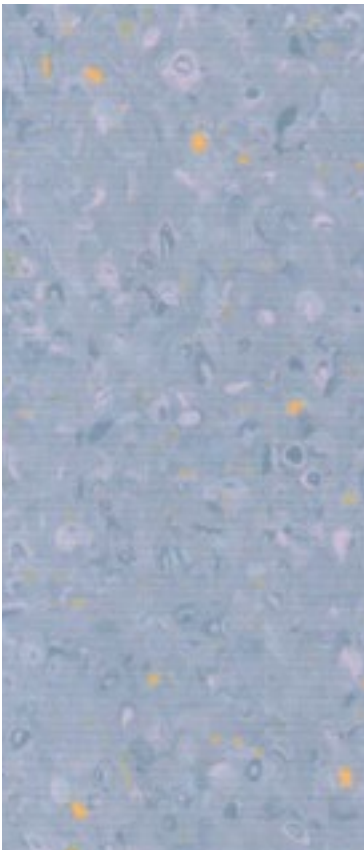

PARROT

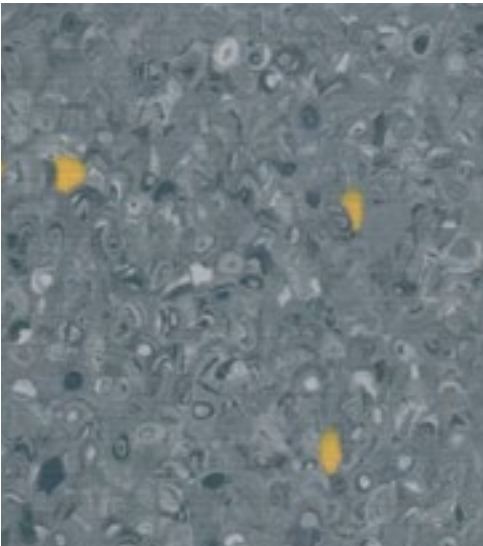

SHARK

HOMOGENEOUS