


3768 SIP Column Speaker

Audio Parameters

- Output:
 - 10W PoE
 - 10W 12V/2A
 - 20W 18V/2A
 - 30W 24V/2A
- Impedance: 4 Ω
- Frequency range: 160Hz~15kHz
- Signal-to-noise ratio: 90dB
- Speakers: 4*4" +1*2"
- Audio codes:
 - Narrowband coding: G.711a/u, G.723.1, G.726-32K, G.729AB
 - Wideband coding: G.722,OPUS
 - MP3. WAV

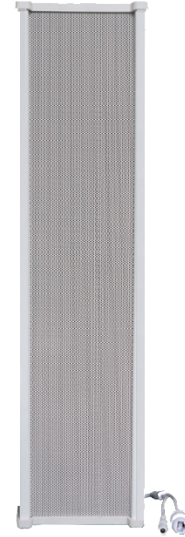

SIP

- SIP 2.0 (RFC3261)
- 2 SIP lines

Network

- IPv4
- LAN connection: RJ45 10BASE-T/100BASE-TX PoE
- Protocol: HTTP, TCP/IP, SSL, DNS, SNTP, NTP, RTSP, TCP, UDP, DHCP

Mechanical properties

- Dimensions (h/w/d): 490*150*100mm
- Weight: 2.2kg
- Color: White
- Grille: Surface-treated metal mesh plate
- Speaker shell: Aluminum alloy material
- Mounting method: Wall mounted
- Protection: IP65

Power supply

- External power supply 12V/18V/24V DC / 2A
- PoE IEEE 802.3af

Configuration and Management

- Via FTP/TFTP DHCP OPT66 / SIP/HTTP/HTTPS/PNP/TR069 automatically
- web management interface
- Web Packet capture (Web -based Packet - dump)
- Configuration export/import
- Software upgrade
- System logs (Syslog)