



Version 5.3

15.02.2024 /

:

2CC-4.2Y

R404A

T " SST -10°C " "

SCT 45°C

OK


20°C

400V-3-50Hz

100%

100%

(R404A/R507A)

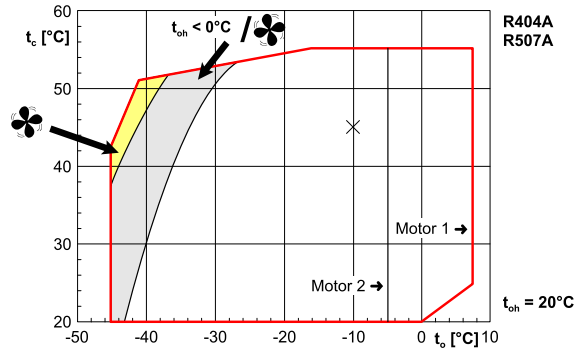

2CC-4.2Y-40S

-	7.86 kW
- *	7.86 kW
-	7.86 kW
.	3.82 kW
(400V)	7.10 A
-	380-420V
.(R)	11.49 kW
/	2.06
/ *	2.06
.	236 kg/h
	Standard
	96.3 °C



ASERCOM

* EN12900 (. 20° , 0)