



6H-25.Y

Version 5.3

16.02.2024 /


6H-25.2Y

Auto
400V-3-50Hz
100%
100%

R404A

0K
20°C

tc [°C]	to [°C]	10	5	0	-5	-10	-15	-20
30	Qo[W]	--	--	--	87943	72553	59256	47812
	Qo*[W]				87943	72553	59256	47812
	P [kW]				23.5	22.1	20.6	18.83
	I [A]				38.1	36.1	33.9	31.4
	Qc[W]				110268	93595	78807	65701
	COP				3.74	3.28	2.88	2.54
	COP*				3.74	3.28	2.88	2.54
	m [kg/h]				2209	1805	1462	1171
				Standard	Standard	Standard	Standard	
40	Qo[W]	--	--	--	74665	61562	50196	40375
	Qo*[W]				74665	61562	50196	40375
	P [kW]				27.2	25.2	23.0	20.7
	I [A]				43.6	40.6	37.4	34.0
	Qc[W]				100512	85490	72046	60026
	COP				2.74	2.44	2.18	1.95
	COP*				2.74	2.44	2.18	1.95
	m [kg/h]				2114	1723	1392	1111
				Standard	Standard	Standard	Standard	
50	Qo[W]	--	--	--	--	50514	41135	32992
	Qo*[W]					50514	41135	32992
	P [kW]					27.8	25.0	22.2
	I [A]					44.5	40.3	36.2
	Qc[W]					76911	64908	54069
	COP					1.82	1.64	1.49
	COP*					1.82	1.64	1.49
	m [kg/h]					1635	1317	1047
					Standard	Standard	Standard	

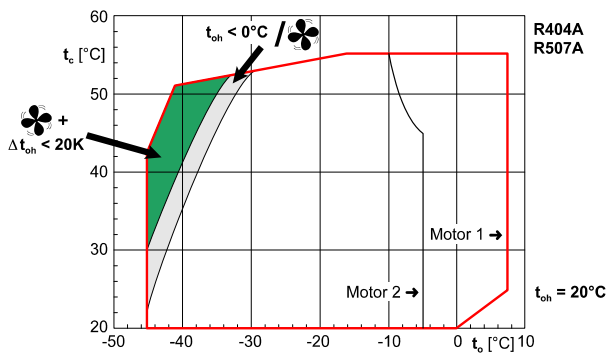

to [°C]	T	SST
tc [°C]		SCT
Qo[W]		-
Qo*[W]		- *
P [kW]		.
I [A]		.
Qc[W]	-	.(R)
COP	/	.
COP*	/	*.
m [kg/h]		.

-- (. ")
* EN12900 (. 20° , 0)