

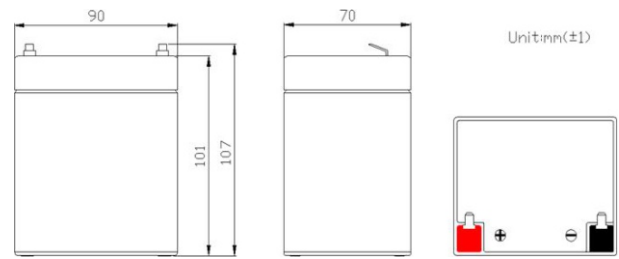
# Lithium Iron Phosphate (LiFePO4) Battery

## Features

- ◆ Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions
- ◆ Built-in automatic protection for over-charge, over-discharge, over current and over temperature
- ◆ Maintenance free
- ◆ Internal cell balancing
- ◆ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- ◆ Can be charged using most standard lead-acid chargers (set)
- ◆ Wide temperature range: -20°C ~60°C

## Application

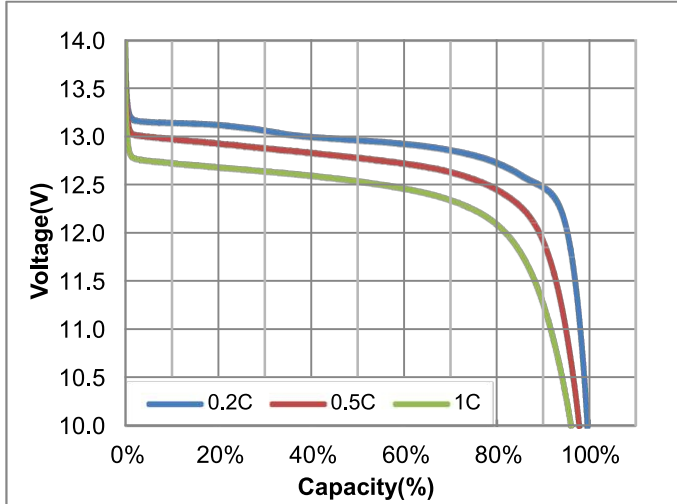
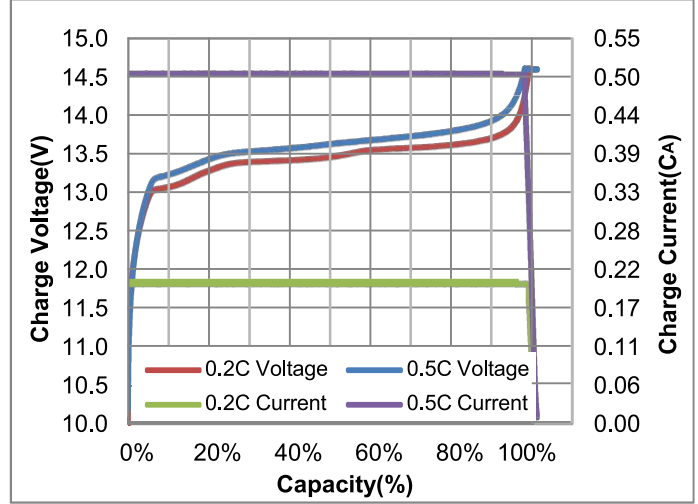
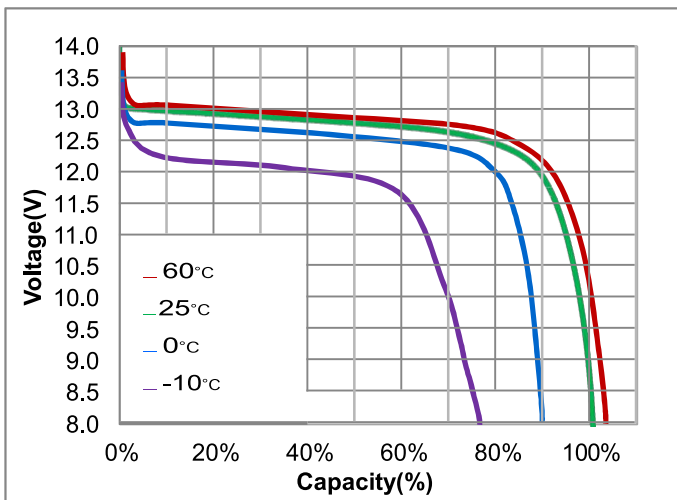
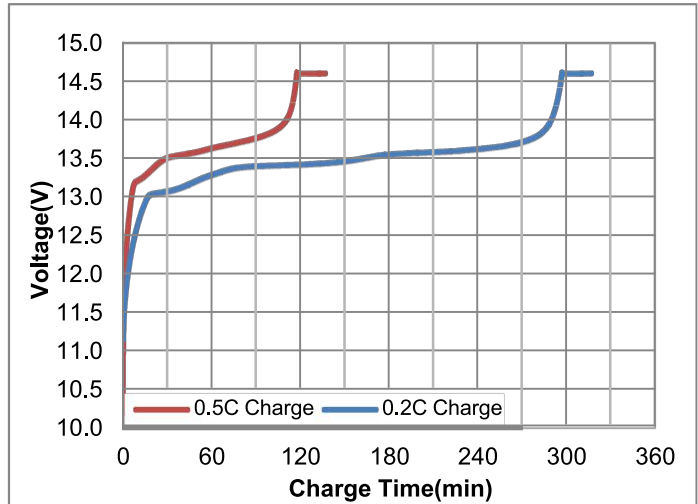
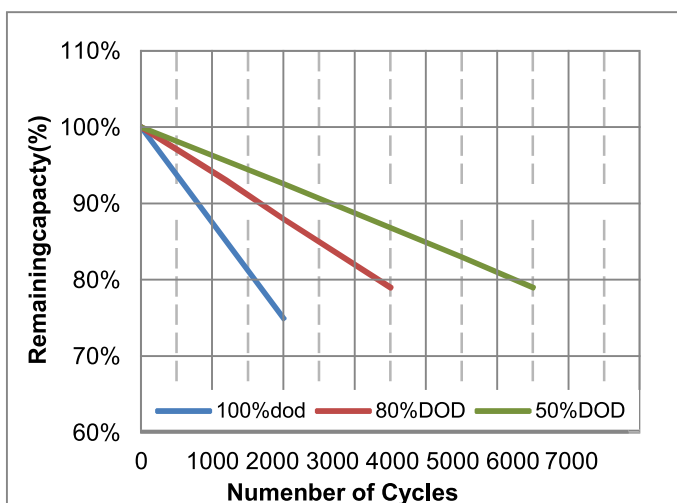
- ◆ UPS
- ◆ Solar & Wind power system
- ◆ Golf Cart
- ◆ Electric vehicle, E-bike, E-rickshaw, e.g.
- ◆ Lighting



## General Specifications

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	6Ah@0.2C
	Energy	76.8Wh
	Internal Resistance	70≤mΩ
	Cycle Life	>3000 Cycles @ 0.2C Charge/Discharge at 80%DOD, End of Life 60% Capacity.
	Months Self Discharge	≤3.5% per month at 25
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode (CC/CV)	At 0°C~45°C temperature, charged to 14.6V at a constant current of 0.2C5A, and then, changed continuously with constant voltage of 14.6V until the current was not more than 0.02C5A.
	Charger Current	1.2A
	Max.Charge Current	3A
Standard Discharge	Discharge Current	1.2A
	Max. Continuous Current	12A
	Max.Pulse Current	30A(<3S)
	Discharge Cut-off Voltage	10.0V
Environmental	Charge Temperature	0°C to 45°C (32°F to 113°F) @ 60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F) @ 60±25% Relative Humidity
	Storage Temperature	0°C to 45°C (32°F to 113°F) @ 60±25% Relative Humidity
	Water Dust Resistance	IP55
Mechanical	Cell & Method	IFR32700 N60,4S1P
	Plastic Case	ABS
	Dimension(L*W*H*TH)	90*70*101*107mm
	Weight	Approx. 0.75Kg
	Terminal	F2

# Lithium Iron Phosphate (LiFePO4) Battery

**DifferentRateDischargeCurve@25°C**

**Charge Characteristics@0.2C&0.5C,25°C**

**Different Temperature Discharge Curve @0.5C, 25°C**

**Charge Characteristics @0.2C&0.5C, 25°C**

**Different DOD Discharge Cycle Life Curve@0.5C, 25**

**Open circuit voltage VS SOC%**
