



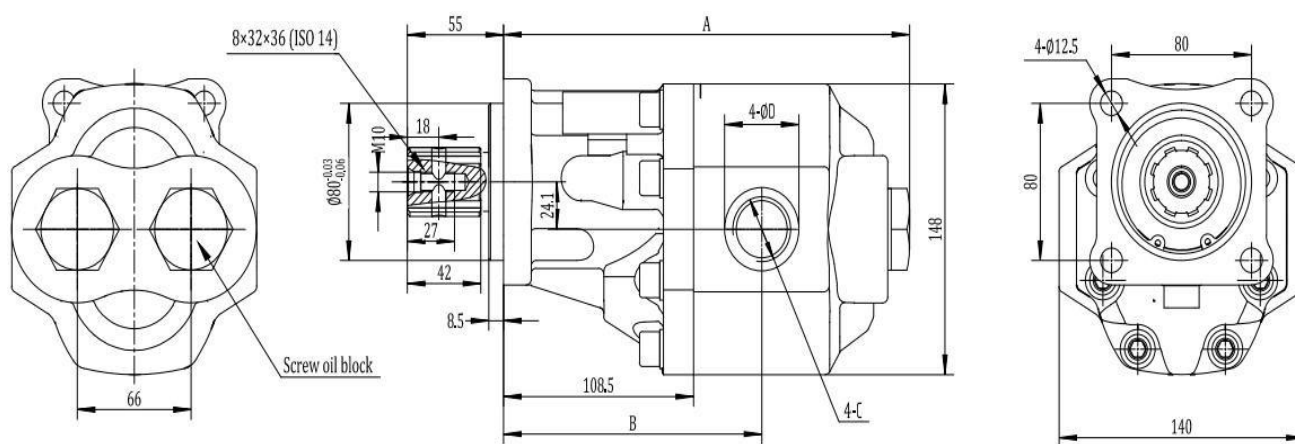

DANE TECHNICZNE

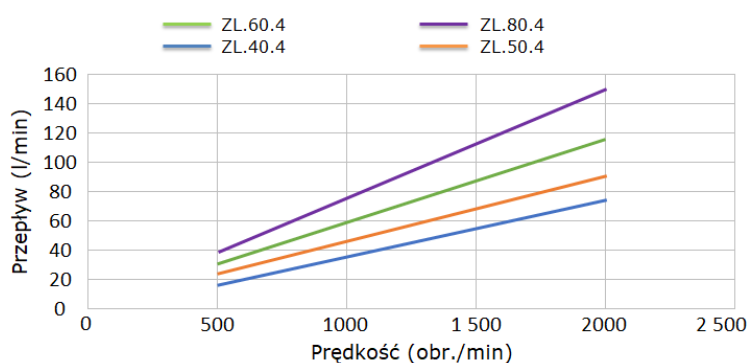

Typ	Geometryczna objętość robocza	Maksymalne ciśnienie			Maks. prędkość (ciągła)	Maks. prędkość chwilowa	Minimalna prędkość	A	B	D	C
	(ml/r)	P1(bar)	P2(bar)	P3(bar)	(obr./min)	(obr./min)	(obr./min)	(mm)	(mm)	(mm)	Inlet (Outlet)
ZL.40.4	40	250	280	315	2000	2500	500	210	142,5	36	G ¾"
ZL.50.4	50	250	280	315	2000	2500	500	214	142,5	42,5	G 1"
ZL.60.4	63	230	250	280	2000	2500	500	221,5	143,5	42,5	G 1"
ZL.80.4	80	230	250	280	2000	2500	500	228,5	147,5	42,5	G 1"