

# S 200A



## Super-automatic “Lever-Less” tyre changer



- New LL tool head
- New turntable
- Bead pressing tool
- Dynamic bead breaking
- Lift (on request)
- Control console
- Footprint


S 200A with wheel lift (option)

For up to 30” rims with new Lever-Less system

## ACCESSORIES SUPPLIED AS STANDARD



## RECOMMENDED ACCESSORIES

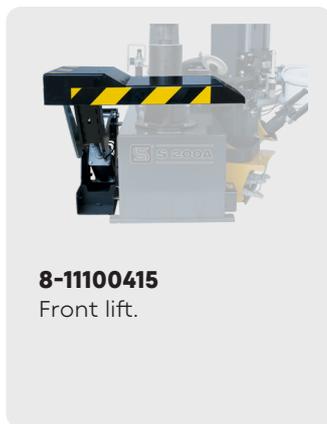


**8-11100415**  
Front lift.



**8-11100460**  
Van rim kit.



**8-11100416**  
Compressed air tubeless inflation device for wheel bead insertion.

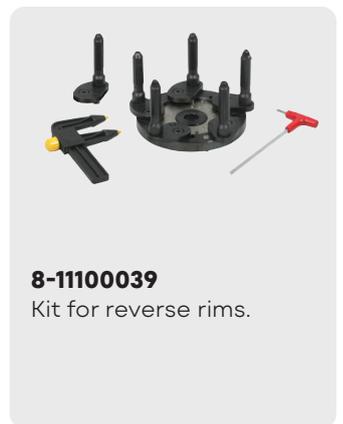


**8-11100039**  
Kit for reverse rims.

For other accessories, please refer to the relevant catalogue

## TECHNICAL DATA

Power supply	<b>230V - 1Ph - 50/60Hz Motoinverter</b>
Clamping capacity	<b>12" ÷ 30"</b>
Maximum wheel diameter	<b>1143 mm (45")</b>
Maximum wheel width	<b>381 mm (15")</b>
Machine weight	<b>490 kg</b>
Machine height	<b>2135 mm (84")</b>
Machine width	<b>1650 mm (65")</b>
Depth	<b>1620 mm (66") with lift 1400 mm (55") without lift</b>

## DIMENSIONS

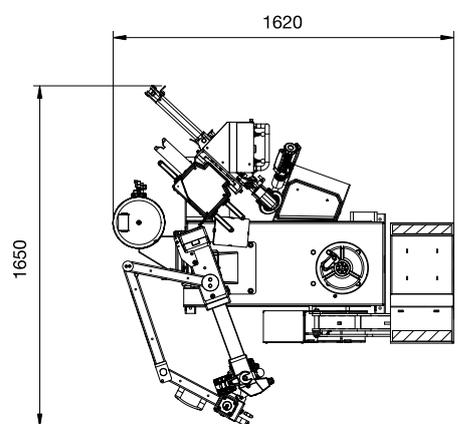

The manufacturer reserves the right to modify the features of its products at any time.