

# FRAME 9 UP TWIN


PELLET AIR - Pellet stoves

# CADEL

Certificate model name : FRAME3 UP 9 kW




Nominal power	kW	9,3
Reduced power	kW	2,7
Introduced thermal power (max)	kW	10,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	84
Nominal efficiency	%	89
Reduced efficiency	%	93,9
Heating volume (min-max)	m³	77 - 265
Nominal CO at 13% O <sub>2</sub>	%	0,009
Reduced CO at 13% O <sub>2</sub>	%	0,021
Emissions CO (13% O <sub>2</sub> ) (min-max)	mg/Nm³	265 - 107
Emissions OGC (13% O <sub>2</sub> ) (min-max)	mg/Nm³	3,2 - 2,1
Emissions NOX (13% O <sub>2</sub> ) (min-max)	mg/Nm³	108 - 119
Dust content at 13% O <sub>2</sub> (min- max)	mg/Nm³	18 - 19
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,18
Autonomy (min-max)	h	25 - 6,9
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	113,7
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,8
Mass of smoke (min-max)	g/sec	2,8 - 5,7
Exhaust fumes temperature (max)	°C	190
Net weight	kg	106
Gross weight	kg	118
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

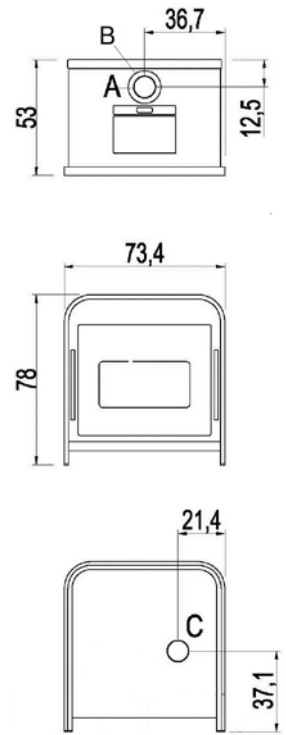


## MATCH

7020006		Black steel	EAN 8053859012726
7020004		Light bronze steel	EAN 8053859012740
OPTIONAL :			
5018009		Ducting Kit	EAN 8053859010333
5018013		Pellet loading chute kit	EAN 8053859010494

## PLUS

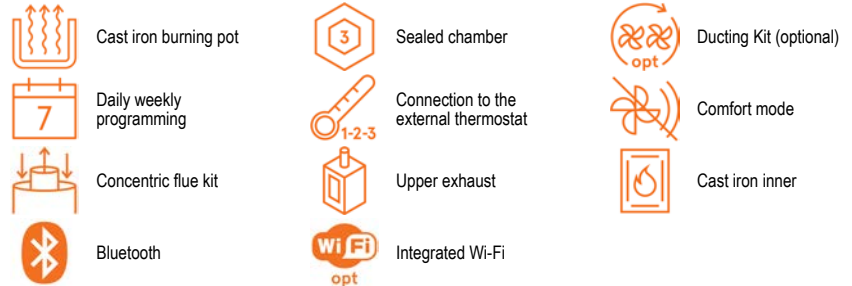


## STOVE PACKING



L (cm)	H (cm)	P (cm)
79	93.9	70


VOLUME (m³)
0,52

## LINING PACKING



L (cm)	H (cm)	P (cm)
-	-	-

## STOCKING



## TRANSPORT

