


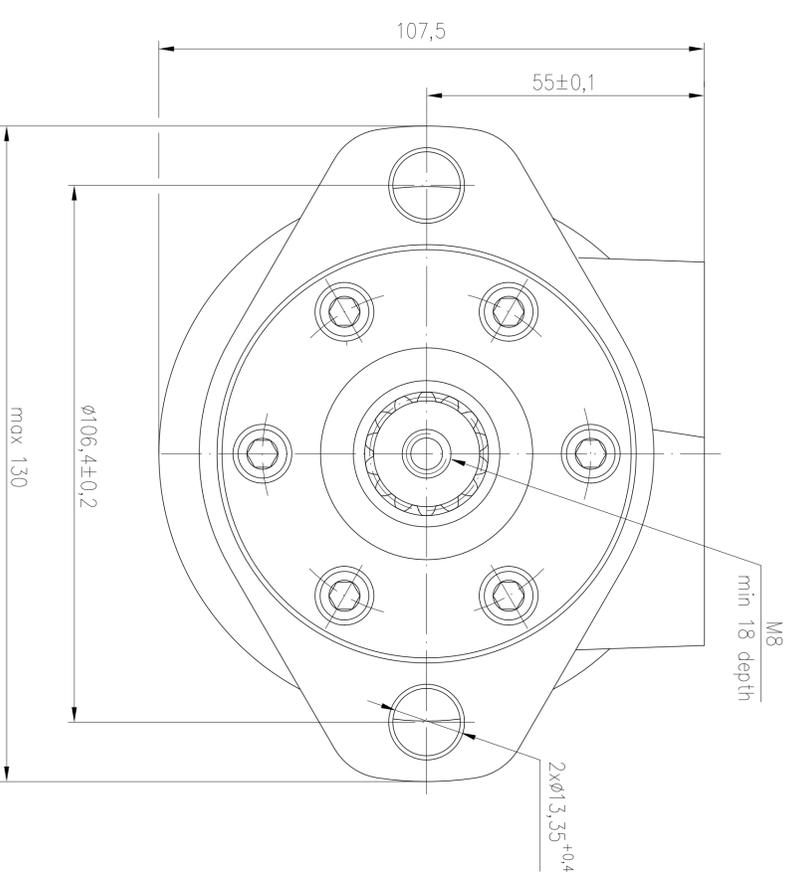


Shaft "SA"
 Splined, B25x22h9 DIN 5482
 Max. Torque 40 daNm

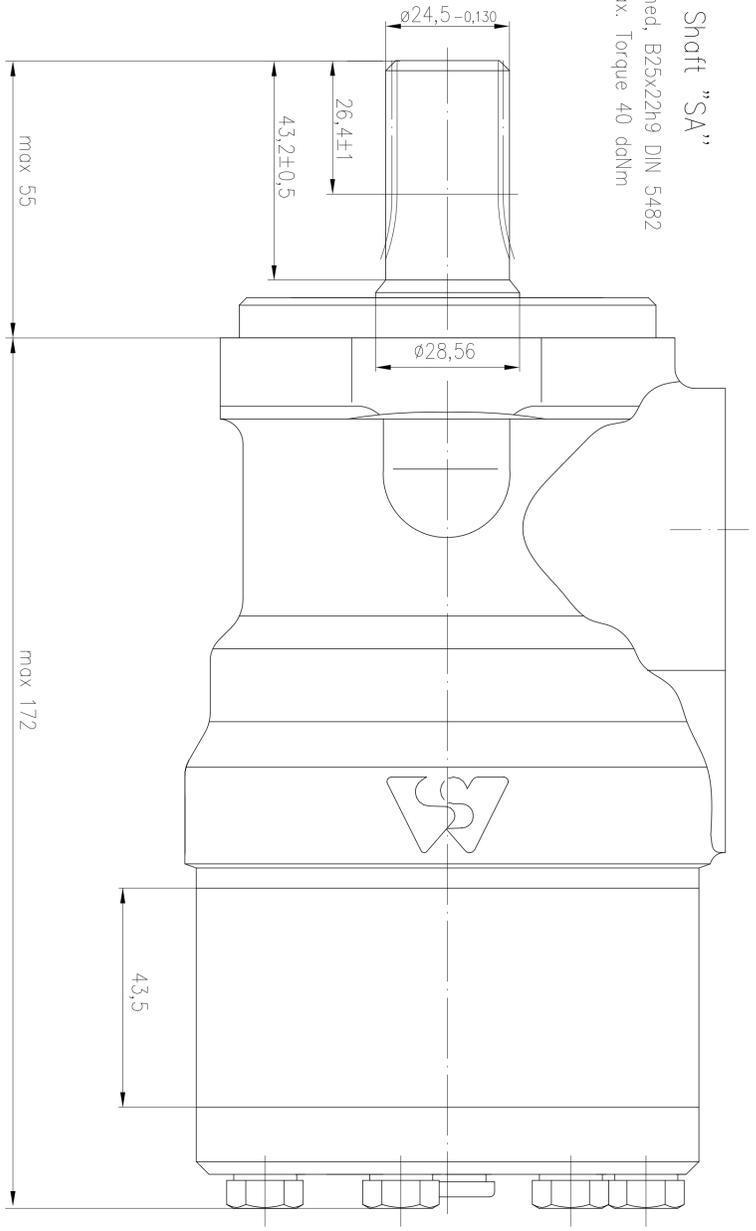

Max. return pressure or
 max. pressure in the drain line

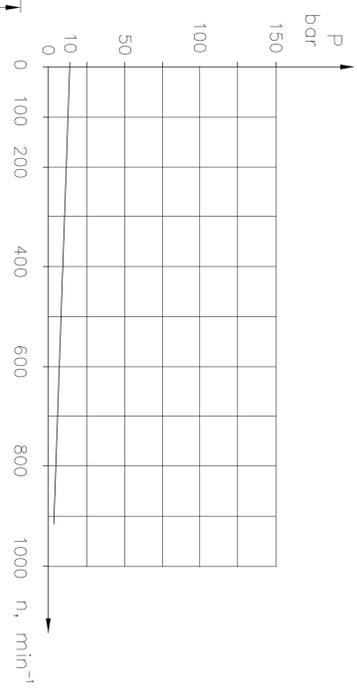


1. Technical DATA

- 1.1 Displacement of the Motor, cm^3/rev 250,1
- 1.2 Max. Speed, RPM
 cont. 240
 int. 300
- 1.3 Max. Pressure Drop, bar
 cont. 175
 int. 200
- 1.4 Max. Torque, daNm
 cont. 39
 int. 47
- 1.5 Max. Oil Flow, lpm
 cont. 60
 int. 75
- 1.6 Max. Inlet Pressure, bar
 cont. 175
 int. 200

FOR APPROVAL

APPROVED BY

DATE

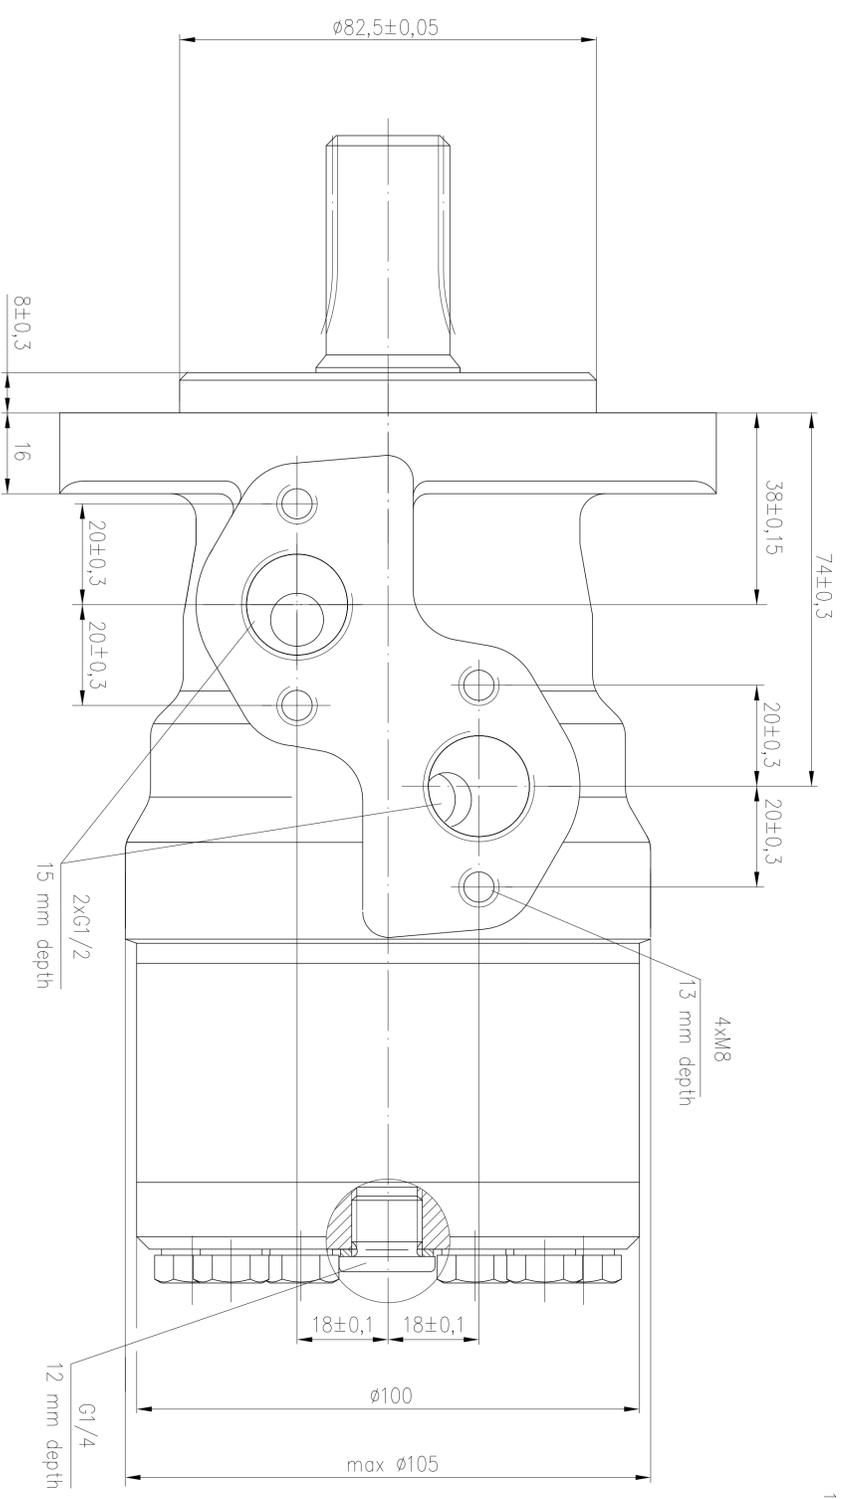

Item ref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Material	Weight	Designed by	Date
	8,4 kg	Cod/gonovo	15.09.2021
			Scale
Hydraulic Motor MR250SA/4			1:1
Rev.	0	Sheet	1