




| | | |
|----------------------|--|---------------|
| Tipping Valve | | Ref. DTCA130H |
| DT | Open Circuit 130 l/min ; progressive descent, type H | |

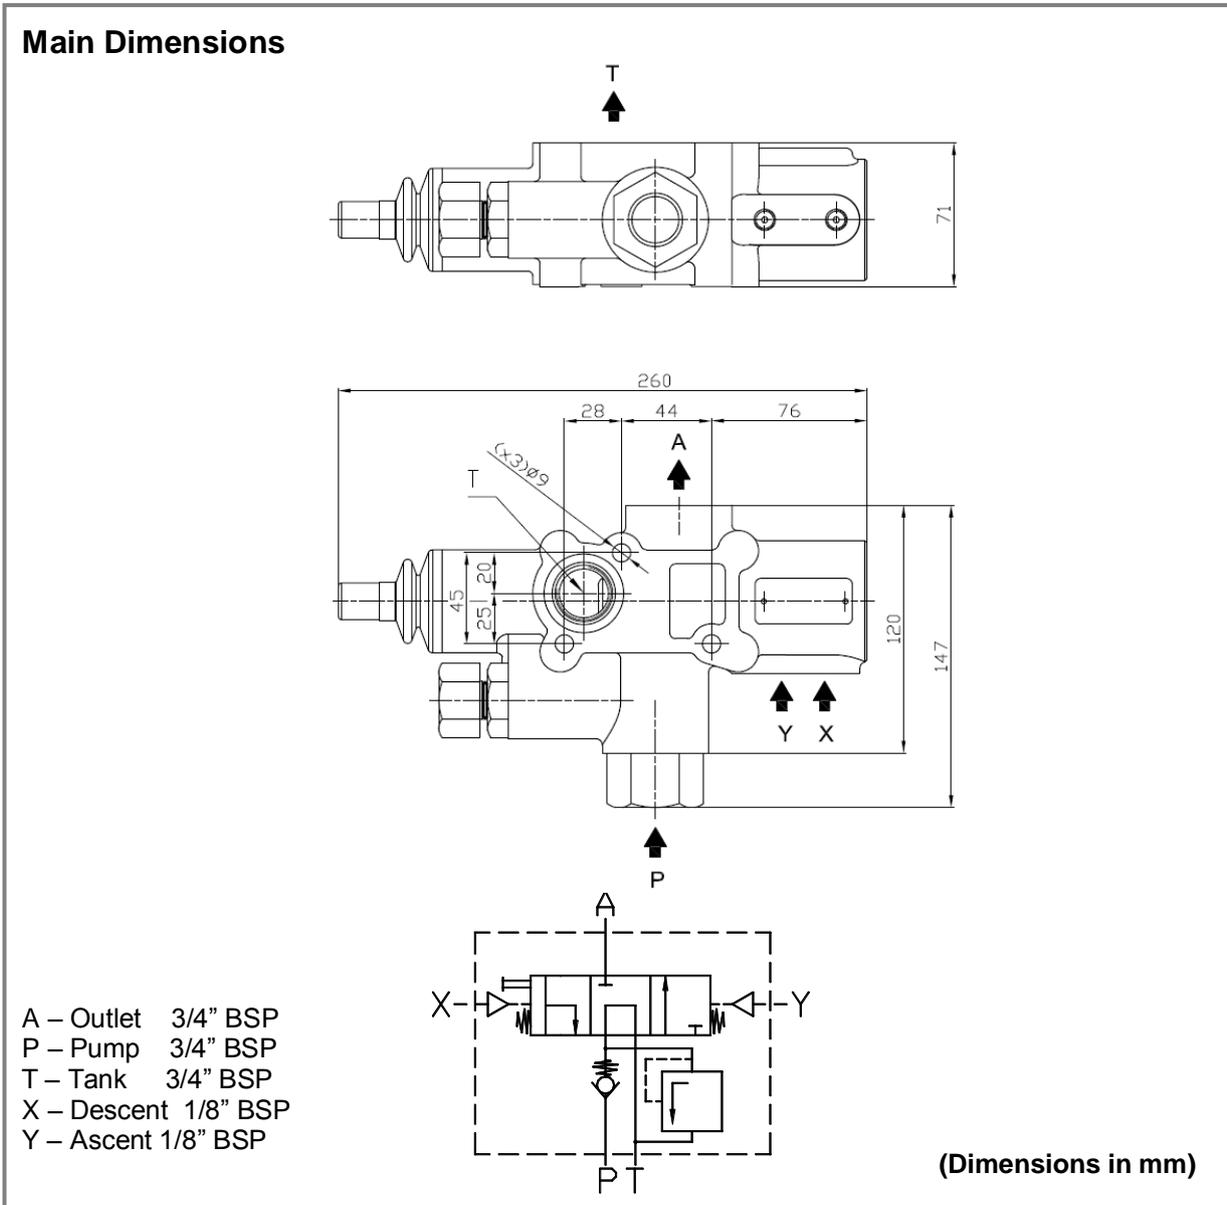

| Main Data | |
|---------------------------------|------------------|
| Maximum pressure (Bar) | 350 |
| Operating pressure (Bar) | up to 300 |
| Flow rate (l/min) | 130 |
| Approx. weight (kg) | 5.2 |

- Notes:**
- ✓ This tipping valve can be used in progressive descent with our air commands ABCD.
 - ✓ Screw the three bolts with a max. tightening torque of 20 N.m (soft tightening).

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown



ABER - Embraagens e Comandos Hidráulicos - A. B. LDA
 Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal
 Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>