

# DATA SHEET

## AMP-A460H

### 4-CHANNEL, 60W AMPLIFIER



The AMP-A460H is a four-channel amplifier delivering 60 watts per channel in a sleek, compact design. The AMP-A460H is a half-rack, D-class amplifier that operates in near silence. Because there is no need for internal cooling fans, the AMP-A460H can be placed in a conference room with virtually no audible noise. The ability to bridge channels gives even more power and flexibility to the AMP-A460H. This amplifier can be used in 70V/100V constant voltage applications when the channels are bridged, making it extremely flexible for many applications. Every AMP-A460H ships with a mounting kit for rack mounting a single unit or two units side-by-side. The AMP-A460H is a perfect pairing for TesiraFORTÉ™-equipped conference rooms or applications where office or classroom sound reinforcement is needed.

#### BENEFITS

- Compact design for versatile placement
- Quick and easy installation
- Quiet operation
- Perfectly matched for TesiraFORTÉ applications

#### FEATURES

- Four channels; 60W per channel
- Bridgeable channels
- Supports both 70V and 100V constant voltage; channels must be bridged for 70V/100V operation
- D-class amplifier topology
- LED indicators for each output channel
- Includes manual switches for constant voltage operation, bridging channels, and a high-pass filter option
- Rack mountable; includes mounting kit
- No software needed
- CE marked, UL listed, and RoHS compliant
- Covered by Biamp Systems' five-year warranty


## ARCHITECTS & ENGINEERS SPECIFICATION

The amplifier shall provide 4 output channels rated for 60W each of maximum power into an 8-ohm load and a 4-ohm load. The amplifier shall also support a bridged mode in which each bridged pair is rated for 120W into an 8-ohm load and a 4-ohm load. In bridged mode, each bridged pair shall be capable of supporting 70V/100V distributed loudspeaker lines with direct-drive constant voltage operation at a total of 120W. The amplifier shall feature a high pass filter at 80Hz that can be manually switched on and off per channel pair. The amplifier shall support 4 analog, line level, balanced inputs for the reception of signal. The amplifier shall provide multicolor LED identification of signal, limiting, and clipping for each channel. The amplifier shall be equipped with screw-down terminal blocks for connecting input and output wiring. The amplifier shall be mountable under a table or in a podium or credenza with customer supplied hardware. The amplifier shall also be a half-rack width, a single rack unit tall 1(RU), and be mountable as a single unit or in pairs with included hardware. The amplifier shall feature a standby operation that is enabled when no signal is present and shall leave the standby state when signal is present again. The amplifier shall be CE marked, UL listed, and shall be compliant with the RoHS directive. Warranty shall be 5 years. The amplifier shall be AMP-A460H.


## AMP-A460H SPECIFICATIONS

<b>Number of Channels:</b>	4	<b>Power:</b>	100-240VAC, 50/60Hz
<b>Maximum Rated Output:</b>		<b>Cooling:</b>	Convection
<b>Single Channel Driven, 4Ω, 8Ω:</b>	60W	<b>Rear Panel Indicators:</b>	80Hz HPF (on/off)
<b>Bridged, 4Ω, 8Ω:</b>	120W		Mode selection (standard/bridged)
<b>Bridged, 70V/100V:</b>	120W		Constant Voltage selection (bridged mode only)
<b>THD+N (20Hz - 20kHz, at rated power):</b>	<0.3%	<b>Environmental:</b>	
<b>Frequency Response (20Hz - 20kHz):</b>	± 1 dB	<b>Operating Temperature:</b>	32-104° F (0-40° C)
<b>Dynamic Range (20Hz - 20kHz, 8Ω, unweighted):</b>	100 dB	<b>Relative Humidity:</b>	0-95%, non-condensing
<b>Input Sensitivity (at rated power):</b>		<b>Compliance:</b>	
<b>8Ω, 70V:</b>	0 dBu		UL and C-UL listed (USA and Canada)
<b>100V:</b>	+1.6 dBu		FCC Part 15B (USA)
<b>Amplifier Topology:</b>	Class D		CE Marked (Europe)
<b>Accessories included:</b>	Rack mount kit		RCM (Australia)
<b>Overall Dimensions:</b>			EAC (Eurasian Customs Union)
<b>Height:</b>	1.7 inches (44 mm)		RoHS Directive (Europe)
<b>Width:</b>	8.7 inches (221 mm)		CCC (China)
<b>Depth:</b>	10.5 inches (266 mm)		KCC (Korea)
<b>Weight:</b>	4.2 lbs (1.91 kg)		

## AMP-A460H BACK PANEL

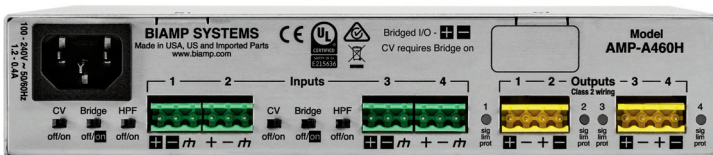

## AMP-A460H RACK MOUNT BRACKET

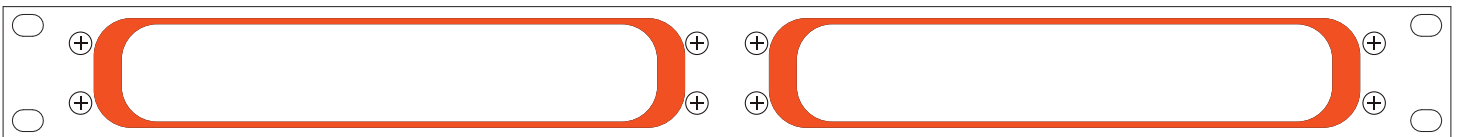

Biamp and TesiraFORTÉ are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.



A. 9300 S.W. Gemini Drive Beaverton, OR 97008 USA

T. +1 503.641.7287

W. www.biamp.com

TESDS-352-2209-EN-R1