

ONEBOND INSTANT ADHESIVE 932

Description

ONEBOND INSTANT ADHESIVE 932 is a low blooming and low odor cyanoacrylate adhesive, and it is formulated for the assembly of a variety of plastic, metal and rubbers. It is specially formulated for the assembly of difficult-to-bond materials and it is particularly suited for bonding porous or absorbent materials such as wood, paper, leather and fabric. It will highly polymerize with moisture in the air for a fast cure and meet the highest industrial standards. ONEBOND 932 product does not contain solvent, and it is used in demanding applications where very good performance characteristics are required. They include resistance to most types of environmental exposures, moderate heat, aging and many different chemicals, as well as high strength and fatigue resistance. ONEBOND 932 is a single component system and does not require heat, mixing, clamps and the use of a catalyst. When a thin layer of ONEBOND 932 applied between two surfaces meets atmospheric moisture, a rapid polymerization occurs producing the ultimate bond strength.

Typical physical properties

Composition	2-Methoxyethyl- 2-Cyanoacrylate
Appearance:	Transparent, colorless to pale yellow liquid
Components:	Single part- requires no mixing or heating
Specific gravity @25°C (g/ml):	1.1
Cure:	Moisture
Viscosity, Brookfield @25°C mPa·s (cP):	150 -250
Full cure (hours):	24
Shelf life:	12 months unopened when stored at 2 - 10 °C

Typical Curing Performance

Under normal conditions, atmospheric humidity initiates the curing process. Although full functional strength develops in a relatively short time, curing continues for at least 24 hours before full chemical/solvent resistance is developed. The rate of cure can be also affected by temperature, the smoothness of the surface, the closeness of the surface and specific surfaces being bonded.

Cure speed (FIXTURE TIME) vs Substrate

The rate of cure will depend on the substrate used. Acidic surfaces such as paper and leather may have longer cure times than most plastics and rubbers. Some plastic with very low surface free energies, such as polyethylene, polypropylene, PTFE and silicone rubber may require the use of a prime. Materials are tested at 25 °C/50% RH and fixture time is defined as the time to develop shear strength of 0,12 N/mm² and the strength keeps at least 10 seconds.

ONEBOND INSTANT ADHESIVE 932

Substrate	Fixture Time (s)
Pine wood	20 - 30
Beech wood	15 - 20
ABS	5 - 10
Polycarbonate	10 - 15
Aluminum A5754	10 - 20
Mild Steel	15 - 30

Cure Speed vs. Bond Gap

The rate of cure will depend on the bond line gap. A thinner bond line will give faster polymerization and a strong bond. Large bond gaps will result in a slower cure and lower bond strength.

Typical Performance of Cured Material**Adhesive properties**

Cured for 72 hours @ 22 °C

Lap Shear Strength

According to ISO 4587 / ASTM D1002

Substrate	Fixture Time (s)
ABS	8 - 9*
Polycarbonate	5 - 8*
Aluminum	7 - 15
PVC(Polyvinyl chloride)	3 - 8
GBMS (Grit Blasted Mild Steel)	20 - 25
NBR (Nitrile-Butadiene Rubber)	0,7*

(*) Substrate failure

ONEBOND INSTANT ADHESIVE 932

Typical Environmental Resistance

Heat Aging


Cured for 1 week @ 25 °C

Lap Shear Strength

According to ISO 4587 / ASTM D1002

GBMS (Grit Blasted Mild Steel)

Aged at temperature indicated and tested at 22 °C

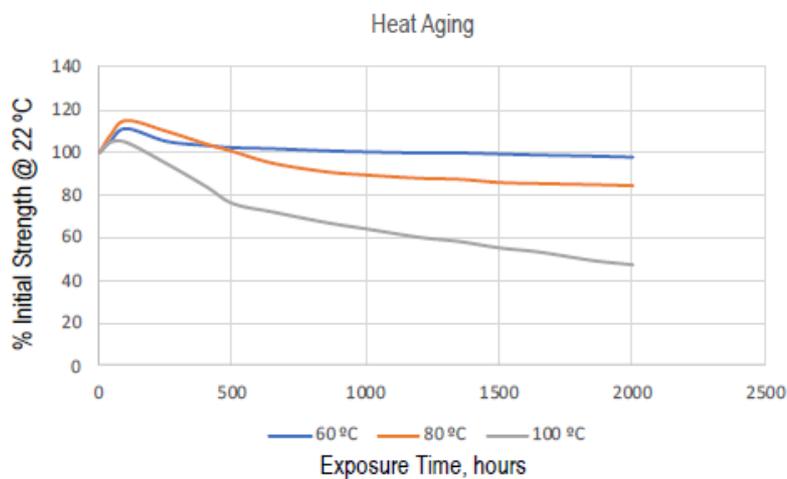

Chemical / Solvent Resistance

Aged under indicated conditions and tested @ 25 °C

Environment	°C	% of initial strength		
		100 h	500 h	1000 h
Water	22	85	65	60
Ethanol	22	100	96	93
Isopropanol	22	108	104	120
Water/glycol	22	104	92	97
Unleaded Gasoline	22	105	95	92
98% Relative humidity	40	86	77	65

ONEBOND INSTANT ADHESIVE 932

Lap Shear Strength

According to ISO 4587 / ASTM D1002

PC (Polycarbonate)

Environment	°C	% of initial strength		
		100 h	500 h	1000 h
Air	22	110*	115*	105*
98% Relative humidity	40	80	65	65

(*) Substrate failure

General Informartion

This product is not recommended for use in contact with strong oxidizing materials and polar solvents although will withstand a solvent wash without any bond strength deterioration. Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene. Full information can be obtained from the Safety Data Sheet (SDS).

Directions for use

1. Make sure the surfaces to be bonded are clean, dry and grease-free before applying the adhesive.
2. Dispense a drop or drops to one surface only.
3. Bring the components to together quickly and correctly aligned.
4. Apply sufficient pressure to ensure the adhesive spreads into a thin film.
5. Do not disturb or re-align until sufficient strength is achieved, normally in a few seconds.
6. Any surplus adhesive can be removed with solvent, such as nitromethane or acetone
7. If small quantities of ONEBOND 932 polymerized material, are deposited in the surface of the container or the bonded material, they can be eliminated wiping these surfaces well with acetone or nitromethane.
8. Product should be allowed to develop full strength before subjecting to any service loads (typically 24 to 72 hours after assembly, depending on bond gap, materials and ambient conditions).

Storage

Keep in a cool area out of direct sunlight. Refrigeration to 5°C gives optimum storage stability. When stored in a refrigerator, allow the adhesive to gradually warm to room temperature prior to use. It will prevent condensation inside the bottle which can reduce shelf life. Containers should be tightly sealed when not in use. Product removed from containers may be contaminated during use. Do not pour back any product to the original container. Misuse of product will void all warranties. The shelf-life is 12 months from date of manufacture.

Precautions

1. Use with proper ventilation. Avoid contact with skin and eyes.
2. If contact with skin occurs, rinse with warm water or dissolve gradually with solvent such as acetone or nitromethane. Do not try to remove forcibly.
3. If adhesive gets into eye, keep eye open and rinse thoroughly. Seek medical attention immediately.
4. Keep well out of reach of children.

ONEBOND INSTANT ADHESIVE 932

5. Keep adhesive in a cool, dry location and out of direct sunlight. For long term storage, refrigeration to 5 °C is recommended.
6. When take out the product from refrigerator, please allow adhesive to reach room temperature before opening bottle to prevent condensation inside the bottle which can reduce shelf life.

Important Notice

The information provided in this Technical Data Sheet (TDS), including the recommendations for use and application of the product, is based on our knowledge and experience with the product as of the date of preparation of this TDS. The product can have a great variety of applications and different working and application conditions according to the environment in which it is found, which are beyond our control. Therefore, Onebond will not be responsible for the suitability of our product in the processes and production conditions for which it is used, nor for the applications or results that are expected from it. We recommend that you carry out your own tests to confirm the operation of our product. Onebond further disclaims any liability for consequential or incremental damages of any kind including lost profits. No agency or representative or employee of this company is authorized to change this provision.