



# TWMNH

N-type Half-cell  
Bifacial Module (48)

## 48HD435-455W




[www.tw-solar.com](http://www.tw-solar.com)



Learn More

**DRAWINGS (Unit: mm)**

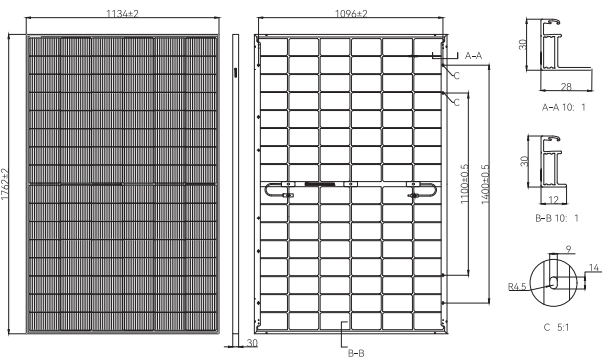

**MECHANICAL PARAMETERS**

Cells	TNC (N Type Monocrystalline Cell)
Cell Orientation	96[6X16]
Dimension	1762±2X1134±2X30mm
Weight	20.9kg
Front Glass	1.6mm high transmittance, AR tempered glass
Rear Glass	1.6mm semi-tempered glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Output Cable	4.0mm <sup>2</sup>
Cable Length	±1200mm, length can be customized
Wind/Snow Load	2400Pa/5400Pa
Packaging	36pcs per pallet, 936pcs per 40'HC

**ELECTRICAL CHARACTERISTICS (STC)**

Module Type: TWMNH-48HDXXX					
Maximum Power: Pmax [W]	435	440	445	450	455
Open Circuit Voltage: Voc [V]	34.49	34.67	34.85	35.03	35.21
Short Circuit Current: Isc [A]	15.90	15.95	16.00	16.05	16.10
Voltage at Maximum Power: Vmp [V]	29.54	29.72	29.90	30.08	30.26
Current at Maximum Power: Imp [A]	14.73	14.81	14.89	14.97	15.04
Module Efficiency: η [%]	21.8	22.0	22.3	22.5	22.8

**ELECTRICAL CHARACTERISTICS (NMOT)**

Maximum Power: Pmax [W]	327	331	335	338	342
Open Circuit Voltage: Voc [V]	32.77	32.94	33.11	33.28	33.45
Short Circuit Current: Isc [A]	12.84	12.88	12.92	12.96	13.00
Voltage at Maximum Power: Vmp [V]	27.51	27.68	27.88	27.96	28.18
Current at Maximum Power: Imp [A]	11.89	11.96	12.02	12.09	12.14

\* STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass1.5, Measuring Tolerance: ±3%  
 \* NMOT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

**ELECTRICAL CHARACTERISTICS (Rear Power Gain)**

5%	Maximum Power: Pmax[W]	456	462	467	472	477
	Module Efficiency: η [%]	22.8	23.1	23.4	23.6	23.9
15%	Maximum Power: Pmax[W]	500	506	511	517	523
	Module Efficiency: η [%]	25.0	25.3	25.6	25.9	26.2
25%	Maximum Power: Pmax[W]	543	550	556	562	568
	Module Efficiency: η [%]	27.2	27.5	27.8	28.1	28.4


**TEMPERATURE PARAMETERS**

Temperature Coefficient (Pmax)	-0.30%/°C
Temperature Coefficient (Voc)	-0.25%/°C
Temperature Coefficient (Isc)	+0.046%/°C
NMOT	45±2°C


**MAXIMUM RATINGS**

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Output Tolerance	0~+5W
Maximum Bifaciality	80±5%

**WARRANTY**

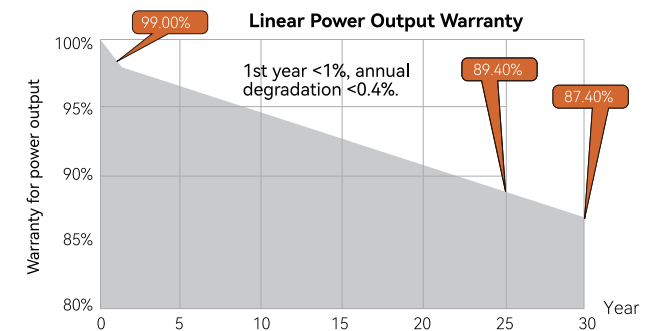

**I-V CURVE**

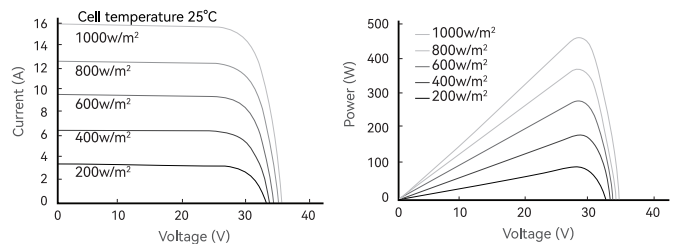

**CERTIFICATIONS**

**Quality Management System and Product Certification**

- ISO 9001:2015 / quality management system
- ISO 14001:2015 / environmental management system
- ISO 45001:2018 / occupation health safety management system
- ISO 50001:2011 / energy management system
- IEC TS 62941—2016 / PV industry quality management system
- IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt), IEC 62716 (Ammonia), IEC 60068-2-68(Sand)



Email: sales@tongwei.com Website: www.tongwei.com.cn Add: No.588, Middle Section Tianfu Avenue, High-Tech Zone, Chengdu, China (Sichuan) Pilot Free Trade Zone

Declaration: With the technical progress and product updates, there exists a deviation between the technical parameter of the Tongwei Solar's future products and the technical parameter in this specification. The Tongwei Solar reserves the right to adjust the technical parameter at any time without notifying the customers. Tongwei Solar reserves the final right of interpretation.(20231227)