


ARK LV Battery System

- Flexible capacity options, 2.56kWh to 25.6kWh
- Excellent safety of cobalt free LiFePO4 battery
- Easy installation with modular and stacked design
- Remote firmware upgrade

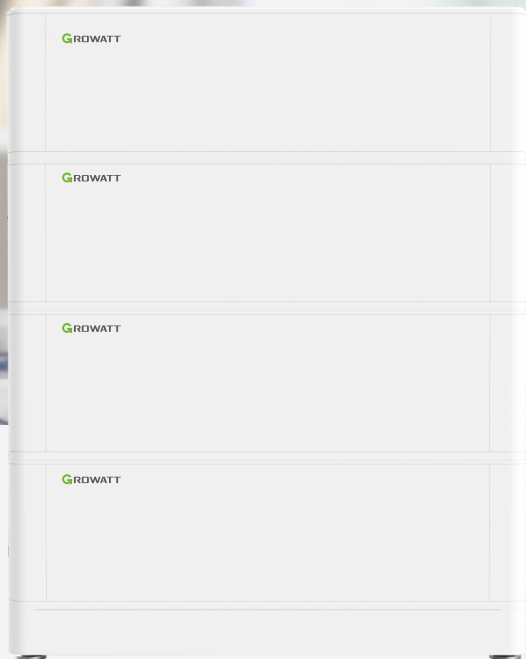

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

www.ginverter.com

Datasheet	ARK 2.5L	ARK 5.1L	ARK 7.6L	ARK 10.2L	ARK 12.8L	ARK 15.3L	ARK 17.9L	ARK 20.4L	ARK 23.0L	ARK 25.6L
System Demo										
Battery Module	ARK 2.5L-A1 (2.56kWh, 51.2V, 28kg)									
Number of Modules	1	2	3	4	5	6	7	8	9	10
Energy Capacity	2.56kWh	5.12kWh	7.68kWh	10.24kWh	12.8kWh	15.35kWh	17.92kWh	20.48kWh	23.04kWh	25.64kWh
Nominal Power*1	1.25kW	2.5kW	3.75kW	5kW	5kW	5kW	5kW	5kW	5kW	5kW
Nominal Charge/Discharge Current	25A	50A	75A	100A	100A	100A	100A	100A	100A	100A
Dimension (W/D/H)	650/260/185mm	650/260/365mm	650/260/545mm	650/260/725mm	650/260/905mm	650/260/1085mm	650/260/1265mm	650/260/1445mm	650/260/1625mm	650/260/1805mm
Weight	28kg	56kg	84kg	112kg	140kg	168kg	196kg	224kg	252kg	280kg
General										
Battery Type	Cobalt Free Lithium Iron Phosphate (LFP)									
Nominal Voltage	51.2V									
Operating voltage Range	47.2 - 56.8V									
IP Protection	IP65									
Installation	Wall-mounted or Floor installation*									
Operation Temperature	-10~50°C*3									
Features										
DoD	90%									
Communication Port	CAN									
Warranty: 5 /10 years	Yes/optional									
BMS Monitoring Parameters	SOC, System voltage, current, cell voltage, cell temperature, PCBA temperature measurement									
Certification										
IEC62619 (Cell&Pack), CE, CEC, RCM, UN38.3										

*1 Depend on the max. battery charge/discharge power of the inverter.

*2 Floor installation requires extra base (W/D/H=650/260/80mm)

*3 Battery discharge: -10°C ~ 50°C, battery charge: 0°C ~ 50°C

* ARK series battery has an EU model and a General model, the storage inverters sold in European countries only work with EU model ARK battery.

*2023 SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.