


CONNESSIONI IDRAULICHE

RACCORDI IN PLASTICA PER INSTALLAZIONI PLASTIC CONNECTIONS FOR QUICK INSTALLATION

More than you
can see

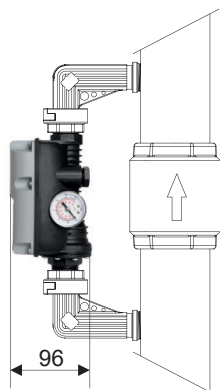

Installazione con by-pass per alte portate
Installation with bypass for high flow rates

>150 l/min



Raccordo 1" 1/4
1" 1/4 connection



Raccordo 1"
1" connection



Raccordo con curva a 90°
90° degree elbow connection

Caratteristiche

- Connessioni idrauliche in plastica con tenuta garantita fino a 10 bar.
- Raccordo dritto da un 1" o 1" 1/4.
- Disponibile attacco in uscita maschio o femmina girevole.
- Disponibile raccordo con curva a 90°.
- Rapida installazione grazie all'attacco girevole.
- Facile rimozione del dispositivo dall'impianto per brevi manutenzioni.
- Guarnizione in gomma interna che, in sostituzione di canapa o teflon, garantisce velocità di montaggio e previene malfunzionamenti alla valvola di non ritorno.
- Compatibili con qualsiasi dispositivo di controllo disponibile sul mercato.
- Costo ridotto rispetto ad una connessione in ottone.

Features

- Plastic plumbing connections with up to 10 bar guaranteed tightness.
- 1" or 1" 1/4 straight fitting.
- Male or revolving female outlet connection available.
- Fitting with 90° elbow available.
- Quick installation thanks to the revolving connection.
- Easy removal of the device from the system for short maintenance.
- Internal rubber gasket replacing hemp or teflon, which guarantees quick assembly and prevents check valve malfunctions.
- Compatible with any control device available on the market.
- Lower cost than brass connection.

Optional - esecuzioni speciali

- Raccordo dritto con ingresso 1" maschio e uscita 1" femmina girevole.
- Raccordo curva a 90° ingresso 1" maschio (lato lungo) e uscita 1" femmina girevole (lato corto).
- Raccordo dritto ingresso 1" maschio e uscita 1" 1/4 femmina girevole.
- Raccordo dritto ingresso 1" 1/4 maschio e uscita 1" 1/4 femmina girevole.

Optional - special arrangements

- Straight fitting with 1" male inlet and 1" female revolving outlet.
- 90° elbow fitting with 1" male (long side) inlet and 1" female revolving (short side) outlet.
- Straight fitting with 1" male inlet and 1" 1/4 female revolving outlet.
- Straight fitting with 1" 1/4 male inlet and 1" 1/4 female revolving outlet.



Facile rimozione del dispositivo
dall'impianto per brevi manutenzioni

Easy removal of the device
from the system for short maintenance

