



CO-EM SERIES

Off Grid Solar Inverter


CO-EM8.5 / 11KW PV 60-500Vdc




Pure sine wave




PV 60-500Vdc




WIFI Optional




Dual MPPT




PF=1.0




Anti-shock design terminal





BMS



RS232 RS485



Lithium Battery Activation

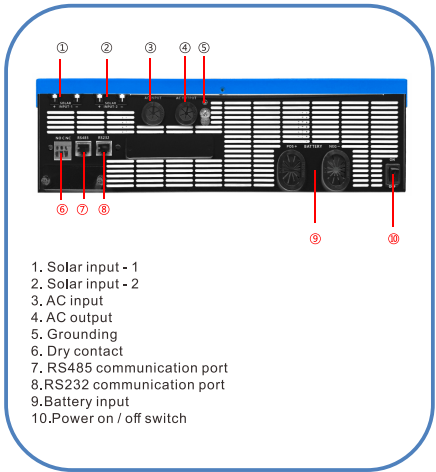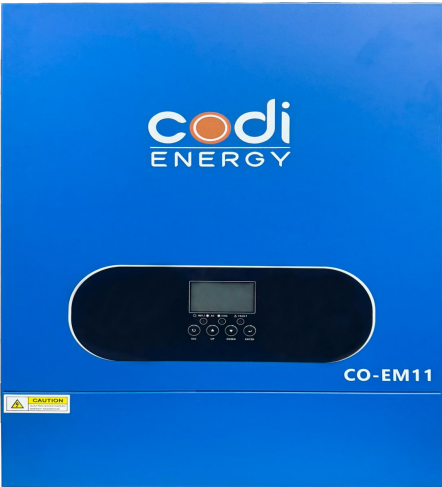

Features

- Built-in 2 MPPT
- Lithium battery activation function by PV or Utility
- Compatible work with LiFePO4 battery via RS485
- Pure Sine Wave
- Power factor 1.0
- PV Input 500Vdc Max
- Built-in MPPT 140A/160A
- Capable to work without battery
- Detachable dust cover for harsh environment
- Wifi remote monitoring optional
- Support multiple output priority: UTL,SOL,SBU,SUB
- EQ function to optimize battery performance and extend lifecycle

Technical Data

MODEL	CO-EM8500-48L	CO-EM11000-48L
Capacity	8.5KVA/8.5KW	11KVA/11KW
Maximum PV Input Power	10KW	11KW
Parallel Capability	NO	NO
Lithium Battery Activation	YES (By PV or Utility)	
Lithium Battery Communication	YES(RS485)	
INPUT		
Nominal Voltage	230VAC	
Acceptable Voltage Range	170-280VAC(For personal Computer);90-280VAC(For Home Appliances)	
Frequency	50/60 Hz (Auto sensing)	
OUTPUT		
Nominal Voltage	220/230/240VAC	
Surge Power	17000VA	22000VA
Frequency	50/60 Hz	
Waveform	Pure Sine wave	
Transfer Time	10ms(For personal Computer);20ms(For Home Appliances)	
Peak Efficiency	94%	
Overload Protection	5s@ > =140% load; 10s@101%~140% load	
Admissible Power Factor	0.6~1 (inductive or capacitive)	
Grid-tie Operation	NO	
BATTERY		
Battery Voltage	48VDC	48VDC
Maximum Discharge Current	180A	220A
Floating Charge Voltage	54VDC	54VDC
OverCharge Protection	63VDC	63VDC
Charging Method	CC/CV	
SOLAR CHARGER & AC CHARGER		
Solar Charger TYPE	MPPT	MPPT
Max.PV Array Power	5000W*2	5500W*2
Max. PV Array Open Circuit Voltage	500VDC	500VDC
PV Array MPPT Voltage Range	60VDC~500VDC	60VDC~500VDC
Max. Solar Input Current	18A*2	18A*2
Max. Solar Charge Current	140A	160A
Max. AC Charge Current	120A	120A
Max. Charge Current	140A	160A
PHYSICAL		
Dimensions, D x W x H(mm)	540*415*122	540*415*122
Net Weight (Kgs)	14	15
Communication Interface	RS232/RS485/DRY CONTACT	
LCD	YES	
ENVIRONMENT		
Operating Temperature Range	-10°C to 50°C	
Storage temperature	-15°C~ 60°C	
Humidity	5% to 95% Relative Humidity (Non-condensing)	

*Product specifications are subject to change without further notice.