


Quick connect terminal #250 (2-6.30*0.8mm)

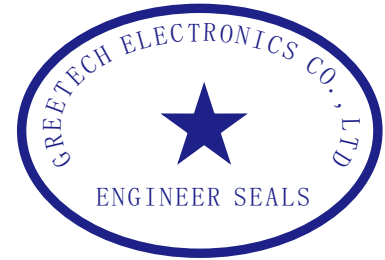

Specification:

1.ON=250±20Pa
OFF=200±20Pa

2.Rating:
0.1A 125/250VAC
3A 125/250VAC

3.Temperature:-25°C~85°C

REV	REF	DESCRIPTION			DWN. BY	DATE
TITLE	GPS100 SERIES OUTLINE DRAWING	PAGE	1/1	VERSION	REV	AO
MODEL	GPS100	DRAWING	CHK. BY	APP. BY		
PART NO.	GPS100-200-250CC-2CZGL	Jiahui Xu	Shuheng Li	Luke Lu		
TOLERANCES UNLESS OTHERWISE STATED		DATE	DATE	DATE		
		2019-07-10	2019-07-10	2019-07-10		
	DIMENSION	ANGLE	SCALE	1:1		
	±0.40	±2°	UNIT	mm		
HUIZHOU GREENTECH ELECTRONICS CO., LTD.						