

Adjustable Drip Emitter (Registered Design)

FEATURES and BENEFITS


- Rotation of the key in the body adjusts the flow rate from 0 to 6 l/h at 100 kPa. Flow rate may be increased or decreased until final shut off.
- Turbulent flow path.
- Two key types available:
 1. End-Line Adjustable 0-6 l/h key. **(Black)**
 2. In-Line Adjustable 0-6 l/h key. **(Brown)**
- Two body types to choose from depending on application:
 1. Standard body with 4.5 mm inlet barb.
 2. Spike with 4.5 mm inlet barb.
- May be turned "OFF" when not in use.

APPLICATIONS

- May be used for vegetable patches, home gardens, nurseries, pots and shrubs.



PERFORMANCE DATA			
DRIPPERS		PRESSURE (bar)	FLOW (l/h)
	Adjustable to 6 l/h at 1.0 bar	0.5	0 - 4.1
		0.75	0 - 5.1
		1.0	0 - 6.0
		1.25	0 - 6.8
		1.5	0 - 7.5
	Recommended operating pressure 1.0 bar		

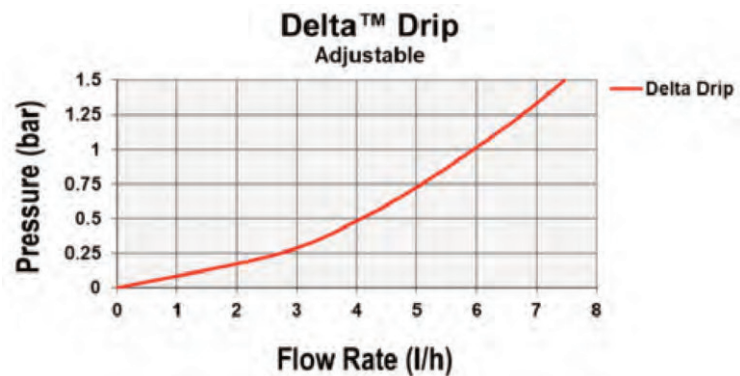

Delta™ Drip 4.5 mm Barb End-Line



Delta™ Drip 4.5 mm Barb In-Line

FILTRATION REQUIREMENTS

- Drip Emitters: 100 microns (150 mesh)

Delta™ Drip Emitters					
PACKAGING					
		Barb End-Line	Spike End-Line	Barb In-Line	Spike In-Line
Order Codes	Packs	200916	200904	203936	203944
	Bulk	020091	020090	020393	020394
Quantity per Bag	Packs	100	25	100	25
	Bulk	1000	1500	1000	1250
Bags per Carton	Packs	70	50	70	50
	Bulk	7	1	7	1
Weight per Carton (kg)	Packs	13.4	7.0	13.4	7.0
	Bulk	13.1	7.7	13.1	7.7
Base Inlet Connection		4.5 mm Barb	4.5 mm Barb	4.5 mm Barb	4.5 mm Barb
Dimensions Assembled (mm)	Height	17	127	17	127 mm
	Width	51	51	61	61
	Depth	9	10	9	10
	Weight (g)	1.72	4.63	1.8	4.7
Material		U.V. Stabilized			



Delta™ Drip Spike End-Line



Delta™ Drip Spike In-Line