



## Ø 450 AC AXIAL FAN 外转子轴流风机




## Ø 450 AC AXIAL FAN 外转子轴流风机

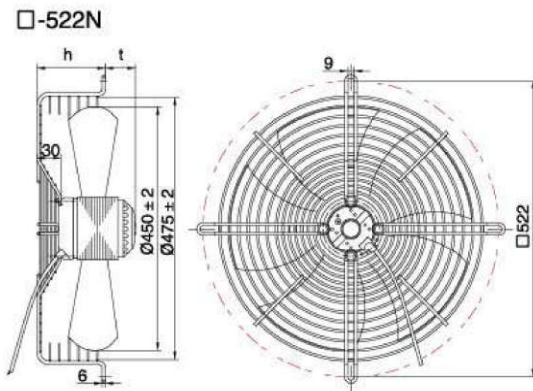

| 常规凹网罩 Concave grid 522N |    |    |  | 低凹网罩 Low concave grid 522N50 |    |     |  |
|-------------------------|----|----|--|------------------------------|----|-----|--|
| 型号 MODEL                | h  | t  |  | 型号 MODEL                     | h  | t   |  |
| YD(S)WF74L60P4-522N-450 | 90 | 70 |  | YD(S)WF74L60P4-522N50-450    | 50 | 110 |  |
| YD(S)WF74L60P6-522N-450 | 90 | 70 |  | YD(S)WF74L60P6-522N50-450    | 50 | 110 |  |

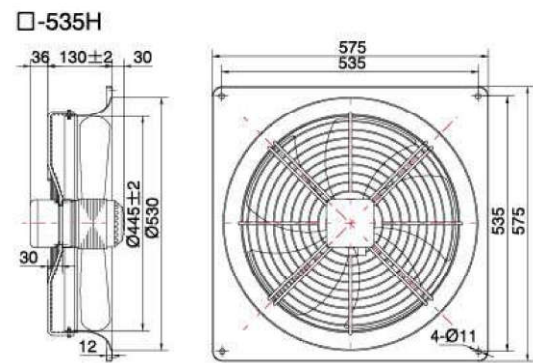

| 带导风圈 Wall plate 535H    |  |
|-------------------------|--|
| 型号 MODEL                |  |
| YD(S)WF74L60P4-535H-450 |  |
| YD(S)WF74L60P6-535H-450 |  |

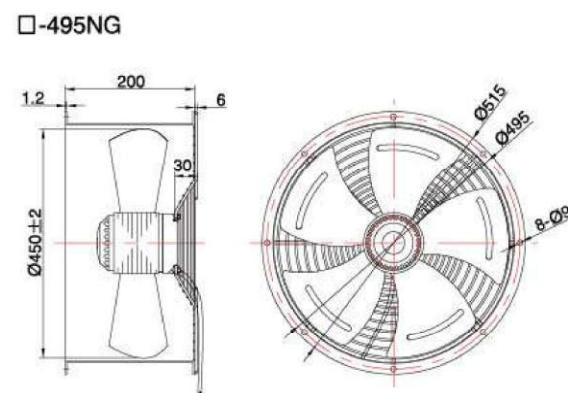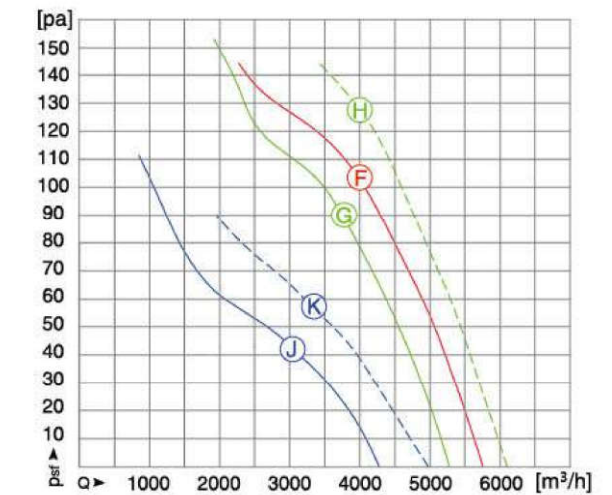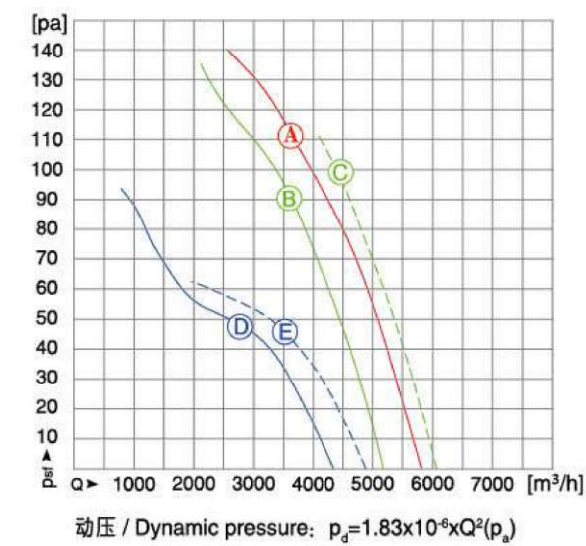

| 带风筒 Air duct 495NG       |  |
|--------------------------|--|
| 型号 MODEL                 |  |
| YD(S)WF74L60P4-495NG-450 |  |
| YD(S)WF74L60P6-495NG-450 |  |

### □-其他安装附件 Others

| 平网罩 Flat screen grid 522P |    |    | 平板网罩 Flat net grid 522B |   |     | 凹板网罩 Concave flat grid 522NB |   |     |
|---------------------------|----|----|-------------------------|---|-----|------------------------------|---|-----|
| 型号 MODEL                  | h  | t  | 型号 MODEL                | h | t   | 型号 MODEL                     | h | t   |
| YD(S)WF74L60P4-522P-450   | 90 | 40 | YD(S)WF74L60P4-522B-450 | — | 130 | YD(S)WF74L60P4-522NB-450     | — | 160 |
| YD(S)WF74L60P6-522P-450   | 90 | 40 | YD(S)WF74L60P6-522B-450 | — | 130 | YD(S)WF74L60P6-522NB-450     | — | 160 |

| 型号 Model           | 电压 Voltage V | 频率 Frequency Hz | 电容器 Capacitor $\mu F/450V$ | 曲线 Curve NO. | 输入功率 Power W | 转速 RPM r/min | 电流 Current A | 静压 Psf Pa | 环境温度 Temp. °C | 静压效率 $\eta_{sf}$ % | 能效值 EFF.Grade N | 噪声 Noise dB(A) | 备注 Note |
|--------------------|--------------|-----------------|----------------------------|--------------|--------------|--------------|--------------|-----------|---------------|--------------------|-----------------|----------------|---------|
| YDWF102L35P4-□-450 | 1~220        | 50              | 10                         | A            | 415          | 1354         | 1.81         | 113       | -40~+80       | 27.19              | 36              | 71             |         |
| YDWF102L35P4-□-450 | 1~220        | 50              | 10                         | B            | 316          | 1386         | 1.44         | 91        | -40~+85       | 29.18              | 38.5            | 69             |         |
| YDWF102L35P4-□-450 | 1~220        | 60              | 10                         | C            | 482          | 1537         | 2.19         | 101       | -40~+85       | 25.53              | 33.7            | 72             |         |
| YDWF102L35P6-□-450 | 1~220        | 50              | 8                          | D            | 188          | 903          | 0.86         | 49        | -40~+85       | 19.19              | 30.1            | 64             |         |
| YDWF102L35P6-□-450 | 1~220        | 60              | 8                          | E            | 251          | 999          | 1.17         | 45        | -40~+85       | 17.87              | 28              | 66             |         |
| YSWF102L35P4-□-450 | 3~380        | 50              | —                          | F            | 391          | 1365         | 0.78         | 103       | -40~+85       | 29.12              | 38.1            | 70             |         |
| YSWF102L35P4-□-450 | 3~380        | 50              | —                          | G            | 320          | 1392         | 0.68         | 91        | -40~+85       | 29.46              | 38.8            | 69             |         |
| YSWF102L35P4-□-450 | 3~380        | 60              | —                          | H            | 490          | 1565         | 0.85         | 127       | -40~+80       | 28.96              | 37.1            | 72             |         |
| YSWF102L35P6-□-450 | 3~380        | 50              | —                          | J            | 191          | 933          | 0.51         | 41        | -40~+80       | 18.74              | 29.5            | 64             |         |
| YSWF102L35P6-□-450 | 3~380        | 60              | —                          | K            | 269          | 1059         | 0.53         | 57        | -40~+80       | 19.45              | 29.3            | 66             |         |

注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.