
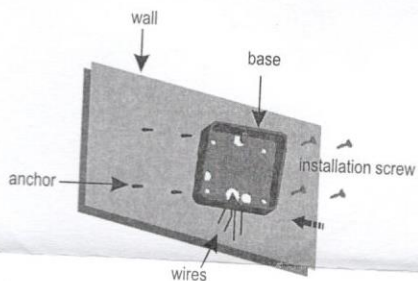




RS12 Key Switch Installation Manual

SMS01049 Version No. A/00



1. Release the cover screw, turn the key anticlockwise and take out the cover from the base.

2. Mark the drill points for the base support using the base itself as a reference point. Drill holes in the wall surface for 4 anchors. Fix the base with installation screws in supply. Let wires go through the bottom hole of the base.

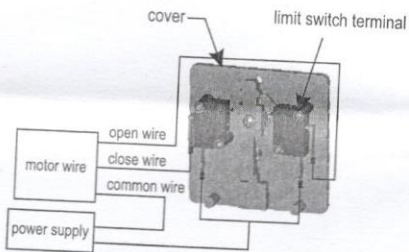

3. Connect the wires to the terminals of limit switch as the picture, then insert the plastic sheath.

4. Sheaf the wires, turn the key anticlockwise and put the cover into the base. Fix the cover screw.